

KU-220A OR series

(Φ220 x 71 mm)
Φ8.66 x 2.8 inch



操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings

葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

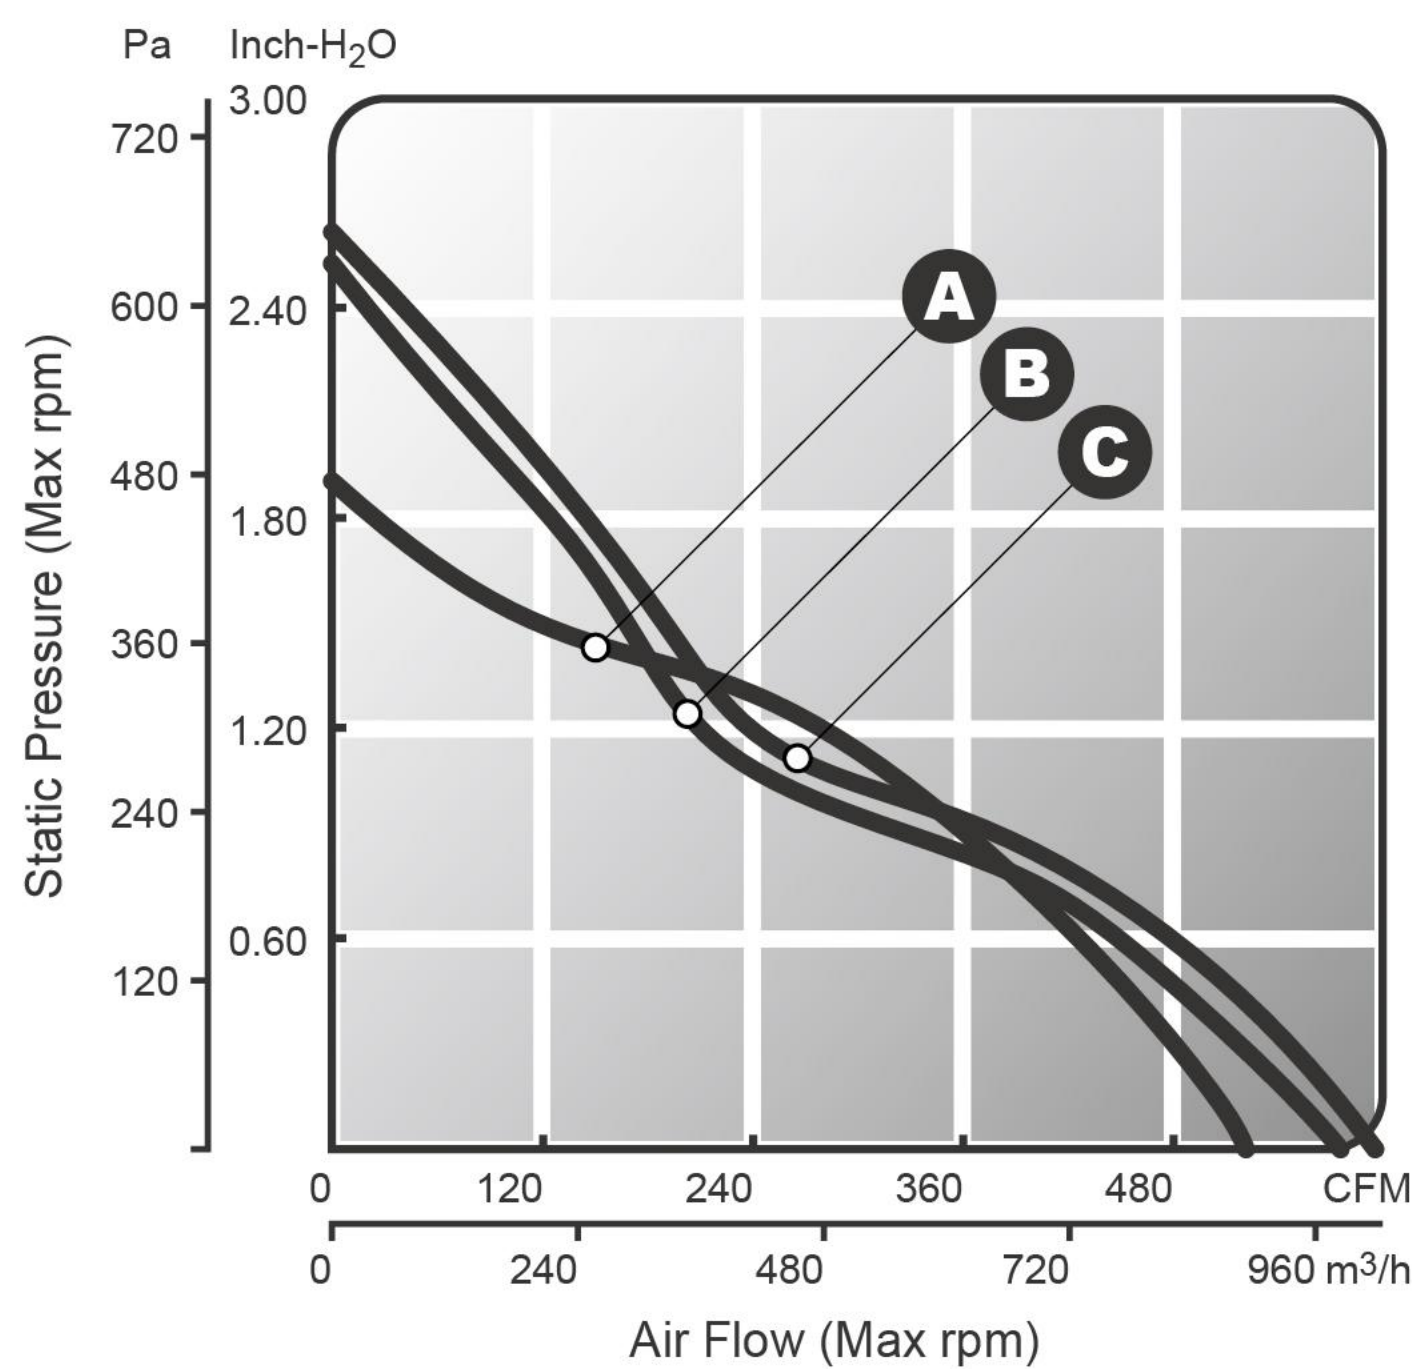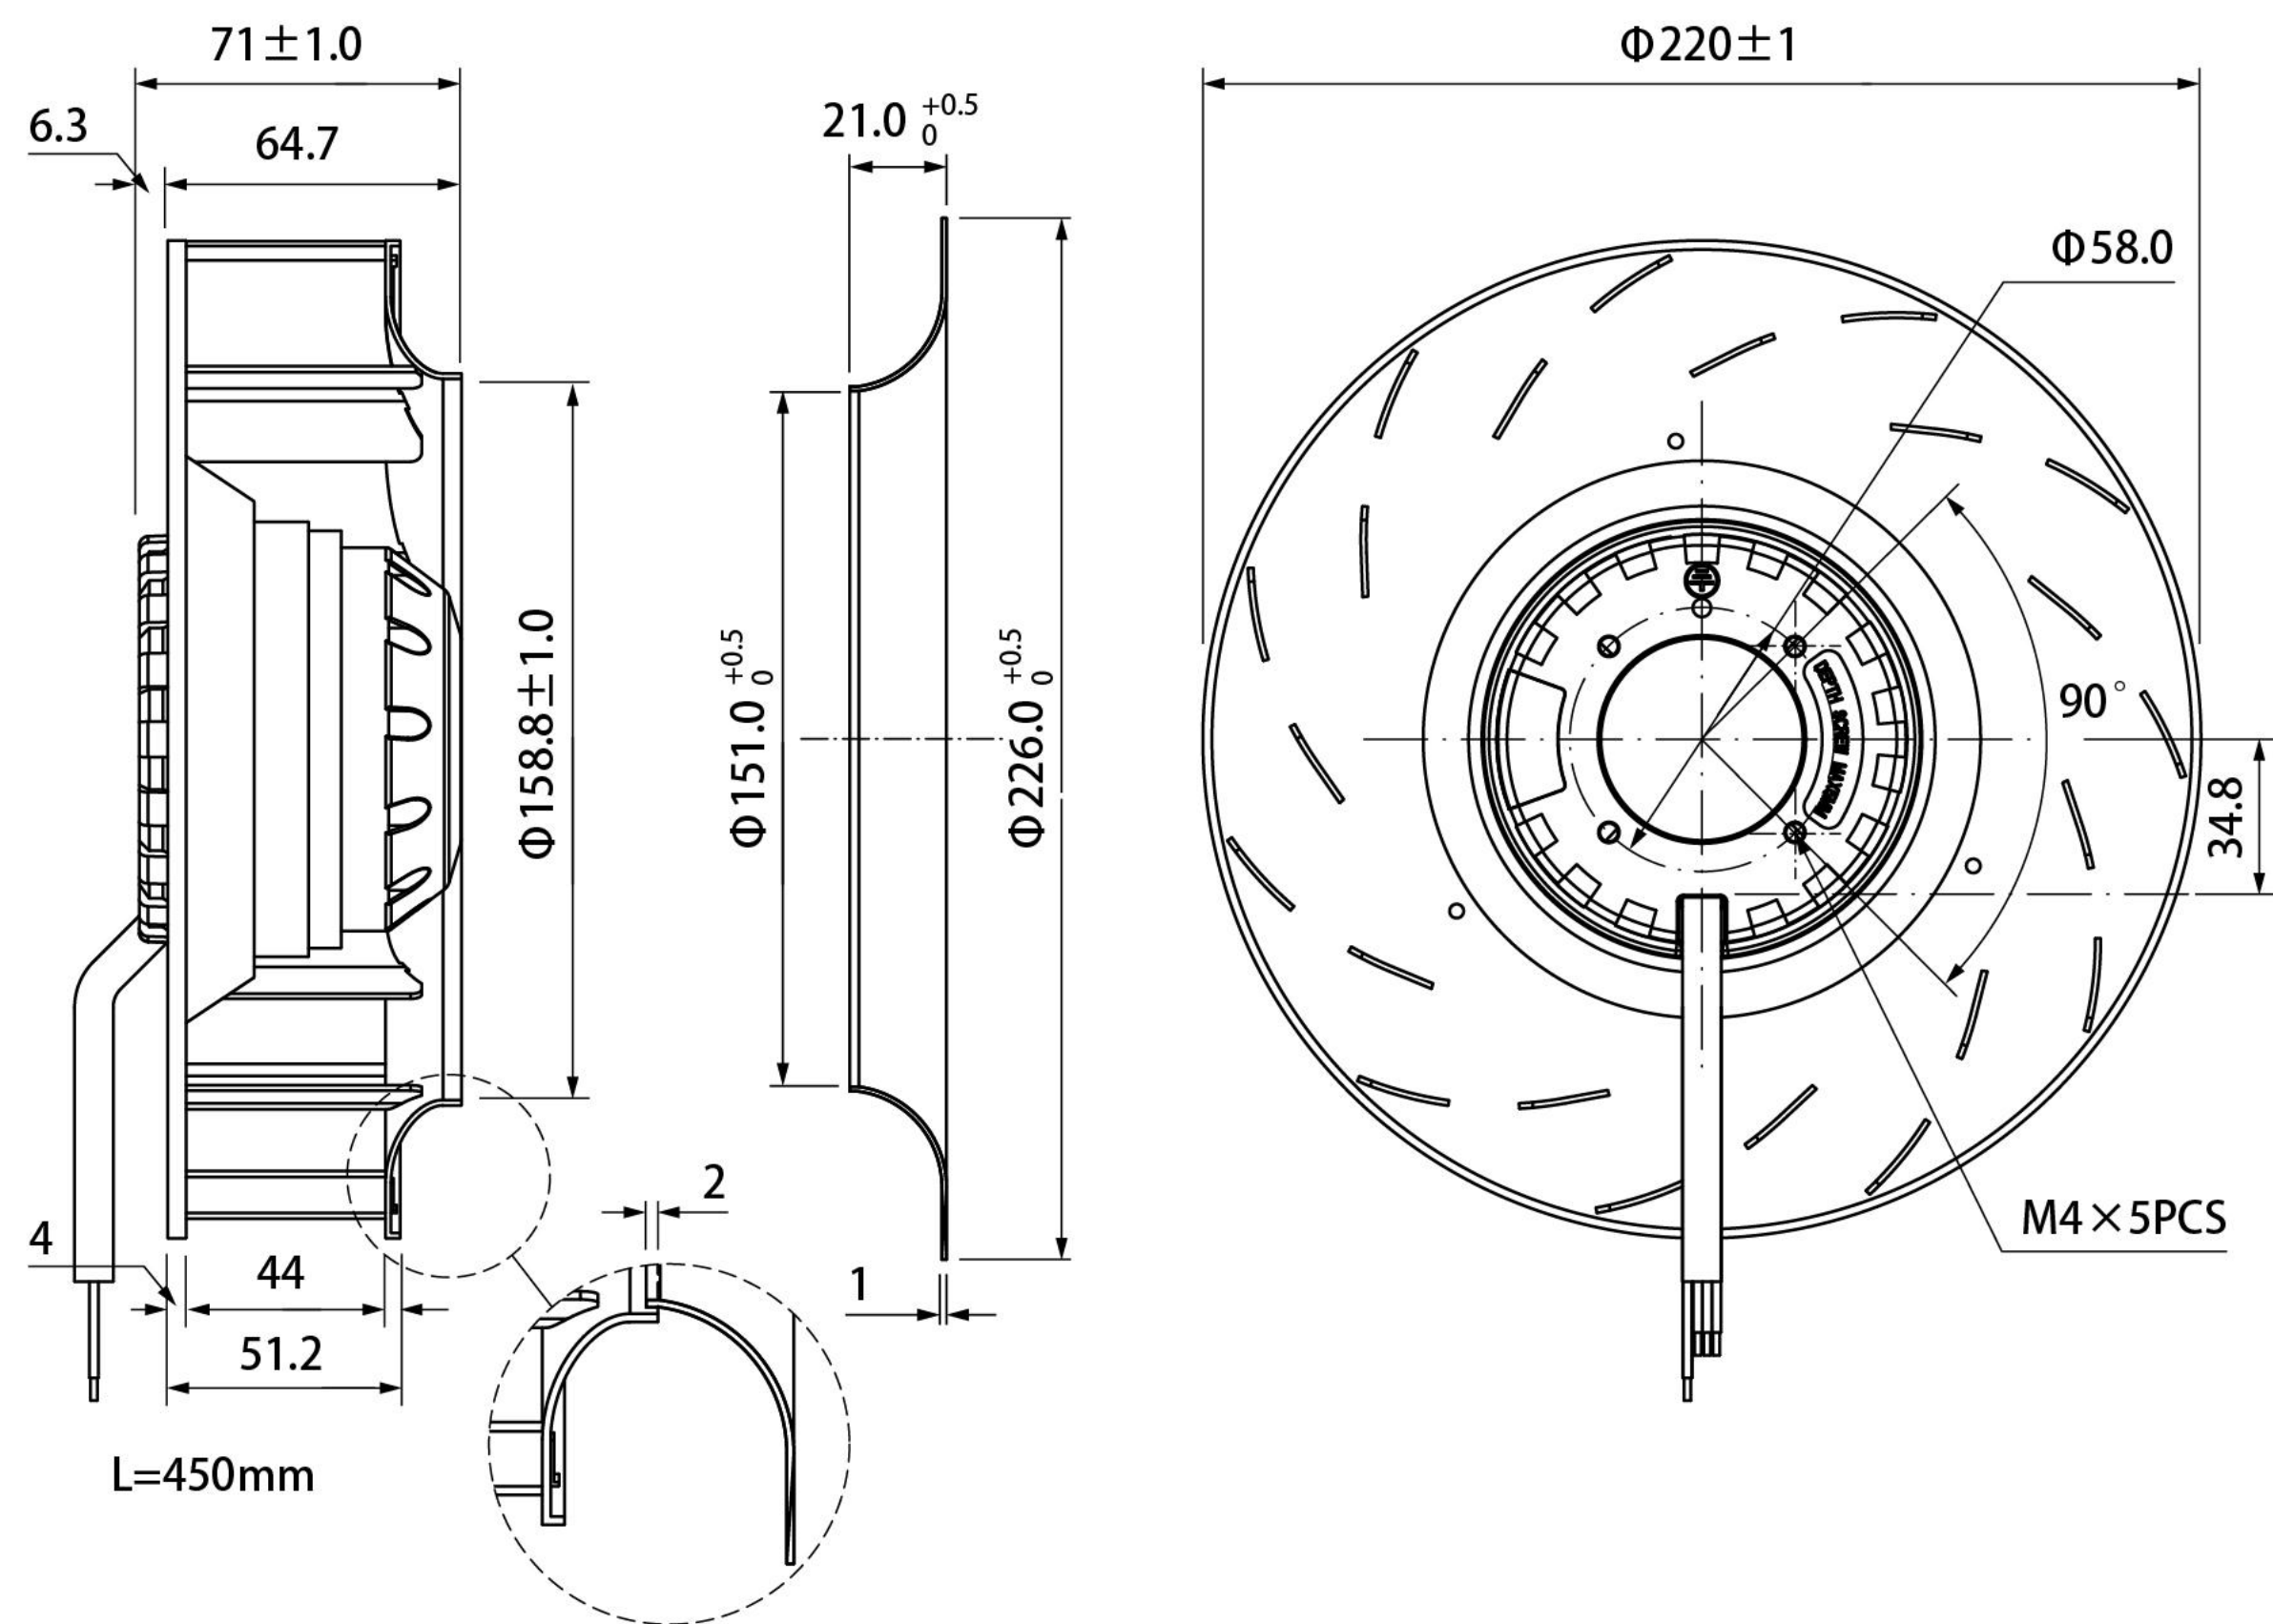

A 2600 RPM B 2800 RPM C 2900 RPM D 3000 RPM



參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KU220AHA(1)1B(OR)	110~120	50/60	0.98/1.20	96/125	2600/2800	523/575	1.91/2.53	74/76	1950
● KU220AHA(1)2B(OR)	220~240	50/60	0.45/0.57	95/125	2600/2800	523/575	1.91/2.53	74/76	1950
● KU220AHA(1)3B(OR)	380~400	50/60	0.26/0.34	85/118	2600/2800	523/575	1.91/2.53	74/76	1950
● KU220AHA(3)3B(OR)	380~400	50/60	0.22/0.22	90/116	2600/2900	523/596	1.91/2.62	74/77	1950

*說明：表中(1)代表單相，(3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.

KU-225A OR series

(Φ225 x 85 mm)
Φ8.86 x 3.35 inch



操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings

葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

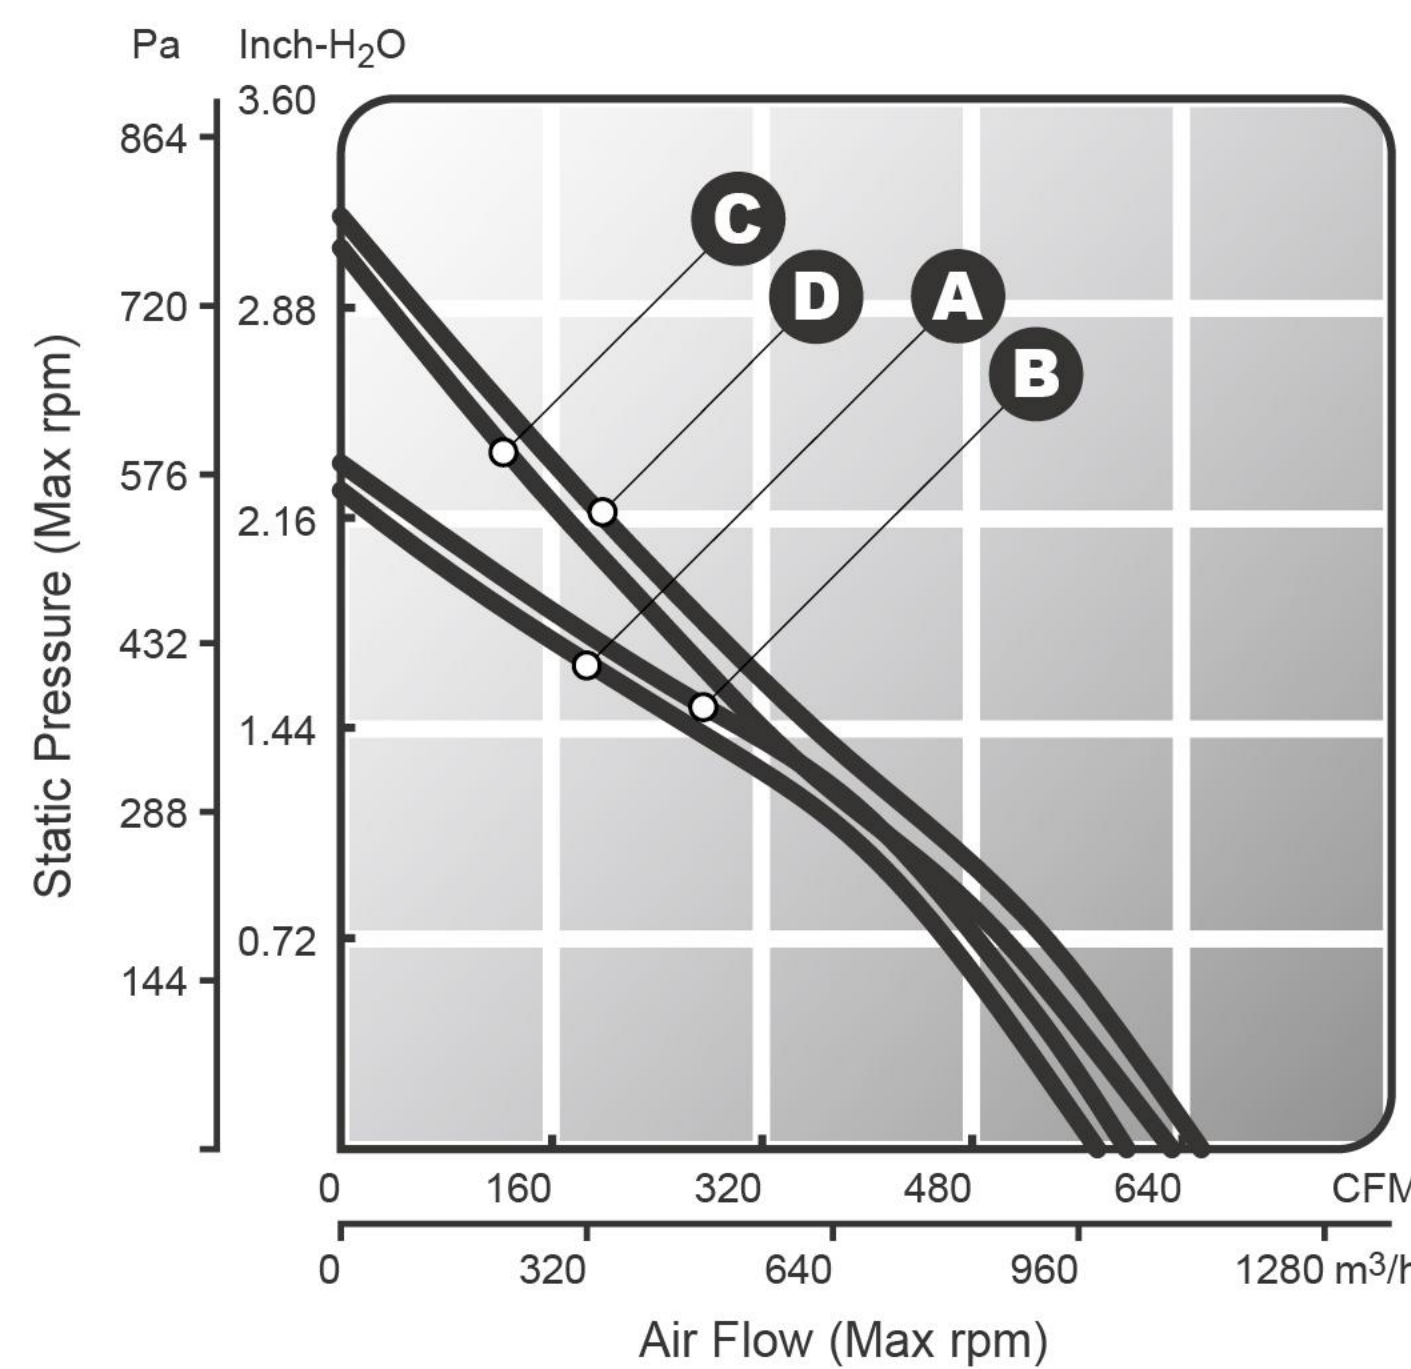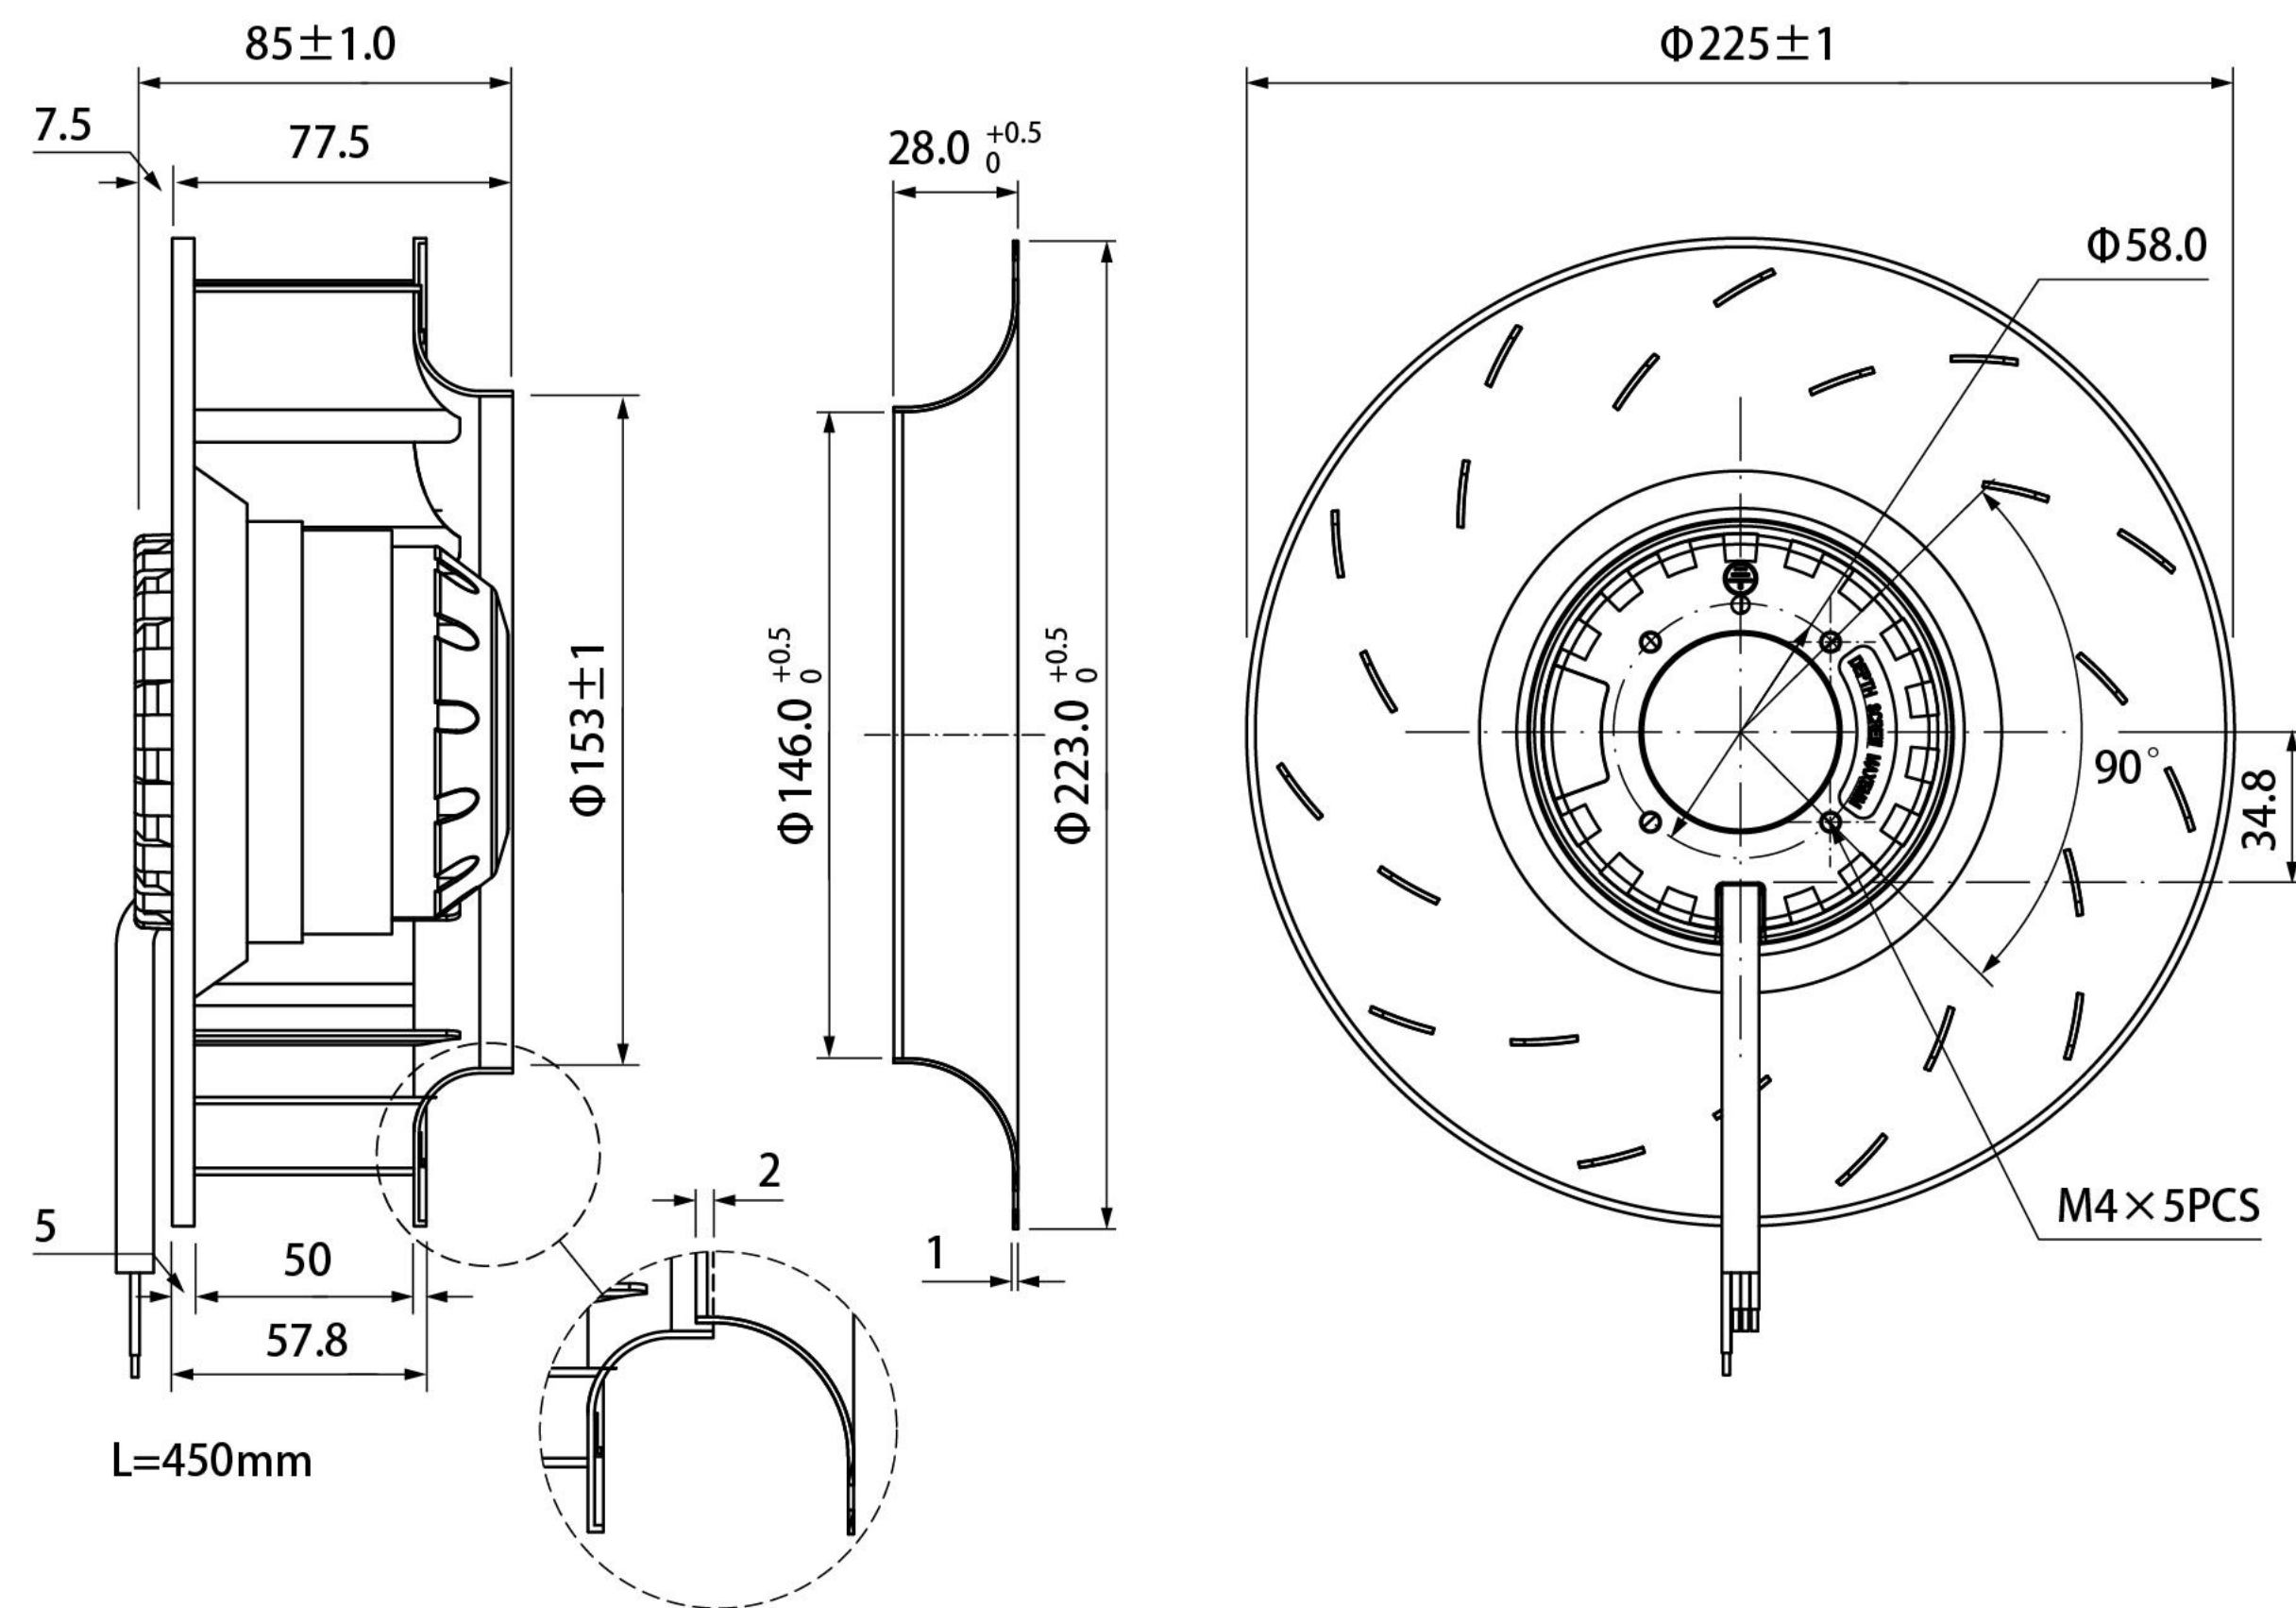

A 2600 RPM B 2700 RPM C 2900 RPM D 3000 RPM



參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KU225AHA(1)1B(OR)	110~120	50/60	1.90/2.10	160/210	2600/2900	577/633	2.26/3.09	77/79	2600
● KU225AHA(1)2B(OR)	220~240	50/60	0.98/1.04	160/208	2600/2900	577/633	2.26/3.09	77/79	2600
● KU225AHA(1)3B(OR)	380~400	50/60	0.56/0.61	150/201	2600/2900	577/633	2.26/3.09	77/79	2600
● KU225AHA(3)3B(OR)	380~400	50/60	0.56/0.48	160/200	2700/3000	599/655	2.35/3.20	78/80	2600

*說明：表中(1)代表單相，(3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.