

KU-225B OR series

($\Phi 225 \times 99$ mm)
 $\Phi 8.86 \times 3.9$ inch

操作溫度 Operating Temperature: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$


存儲溫度 Storage Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

軸承系統 全密封長壽命雙滾珠軸承
 Bearing System: Fully sealed long life double ball bearings


葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
 Impeller: Aluminum plate stamping tensile forming with laser welding process, surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

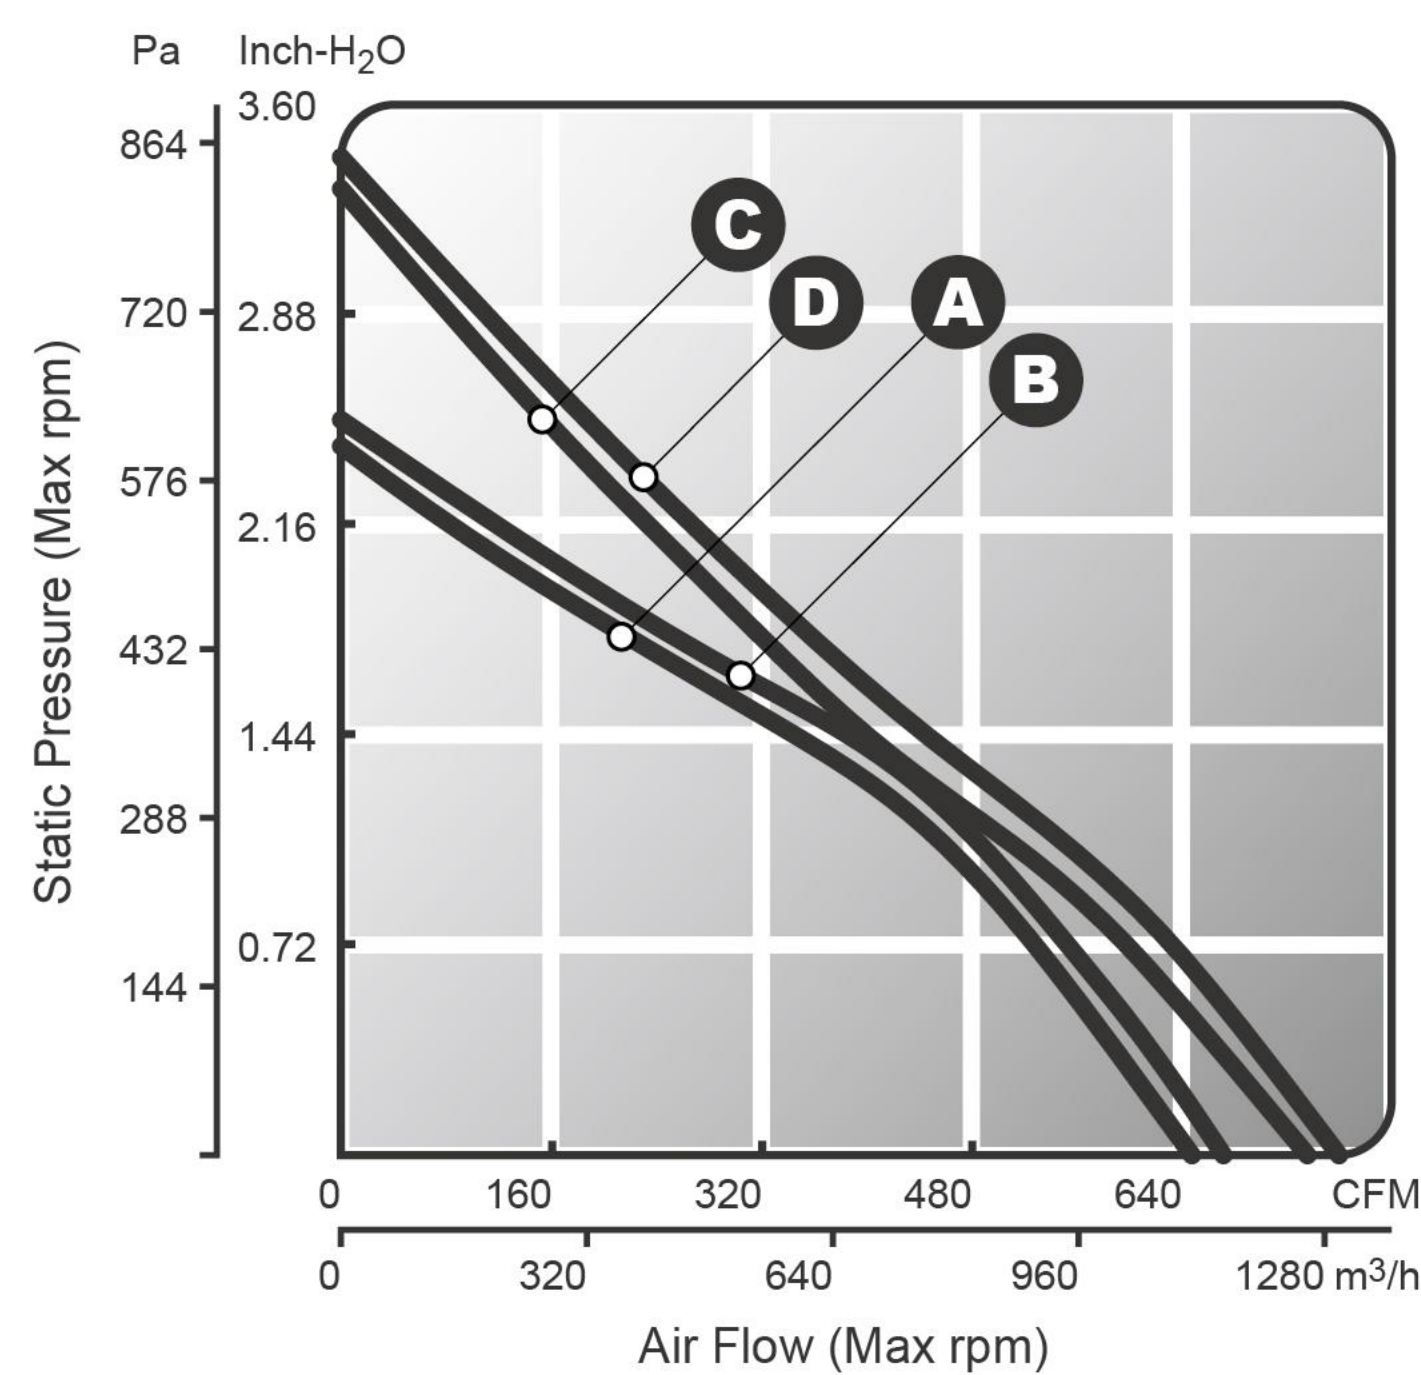

A 2600 RPM **C** 2900 RPM
B 2700 RPM **D** 3000 RPM

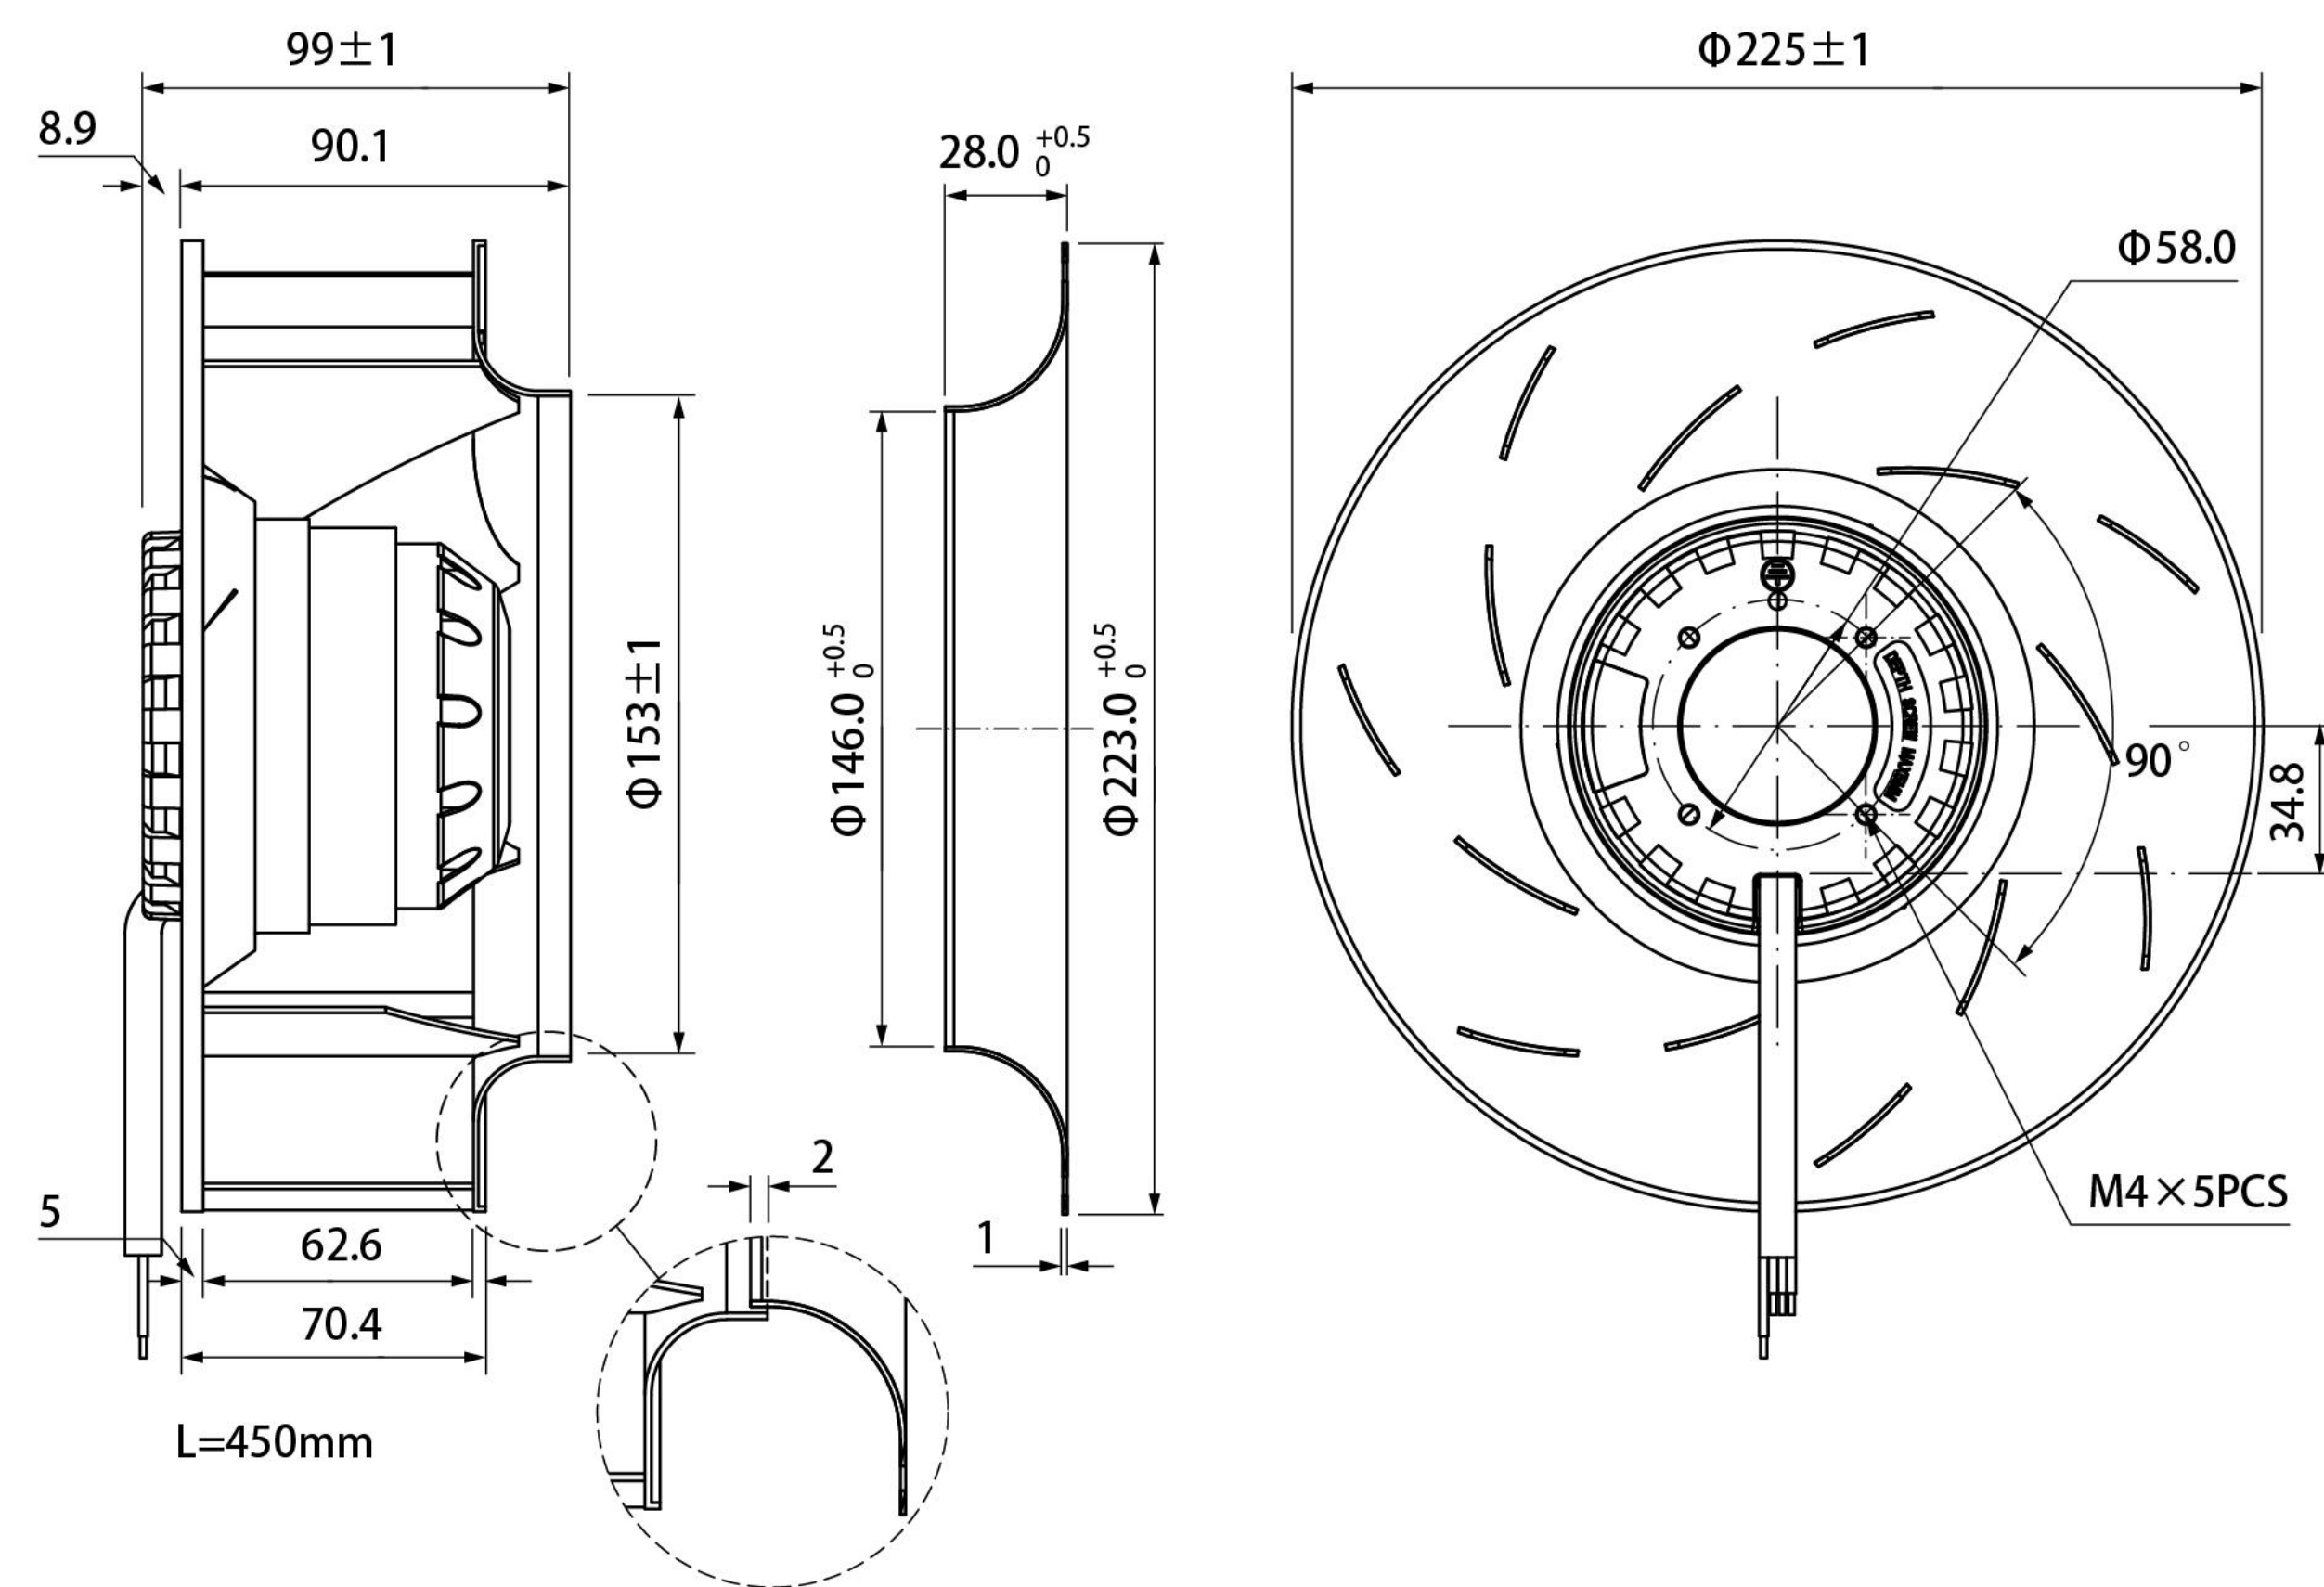

參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KU225BHA(1)1B(OR)	110~120	50/60	1.88/2.00	155/200	2600/2900	649/734	2.43/3.31	78/80	2650
● KU225BHA(1)2B(OR)	220~240	50/60	0.95/0.96	154/195	2600/2900	649/734	2.43/3.31	78/80	2650
● KU225BHA(1)3B(OR)	380~400	50/60	0.54/0.59	146/193	2600/2900	649/734	2.43/3.31	78/80	2650
● KU225BHA(3)3B(OR)	380~400	50/60	0.56/0.47	154/188	2700/3000	674/759	2.52/3.42	79/81	2650

*說明: 表中(1)代表單相, (3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.

KU-250A OR series

($\Phi 250 \times 89$ mm)
 $\Phi 9.84 \times 3.5$ inch

操作溫度 Operating Temperature: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$


存儲溫度 Storage Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

軸承系統 全密封長壽命雙滾珠軸承
 Bearing System: Fully sealed long life double ball bearings


葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
 Impeller: Aluminum plate stamping tensile forming with laser welding process, surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

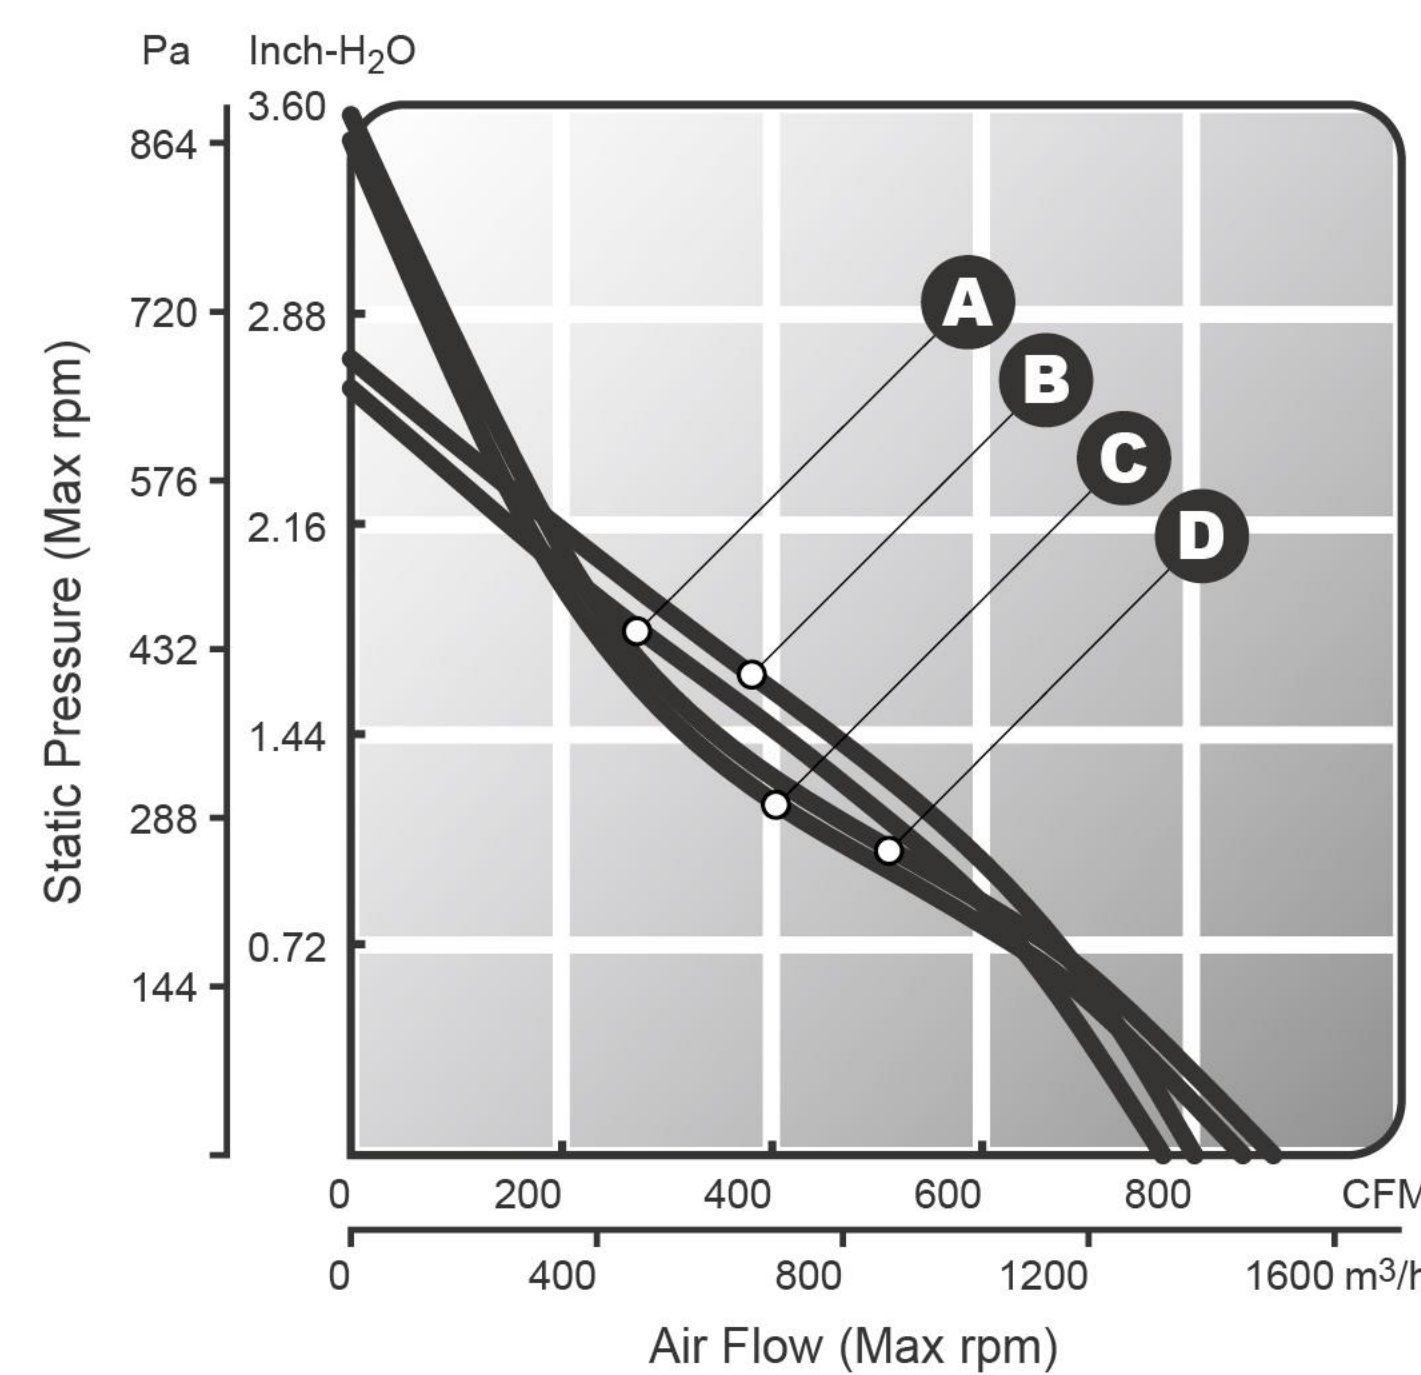

A 2600 RPM **C** 2900 RPM
B 2700 RPM **D** 3000 RPM

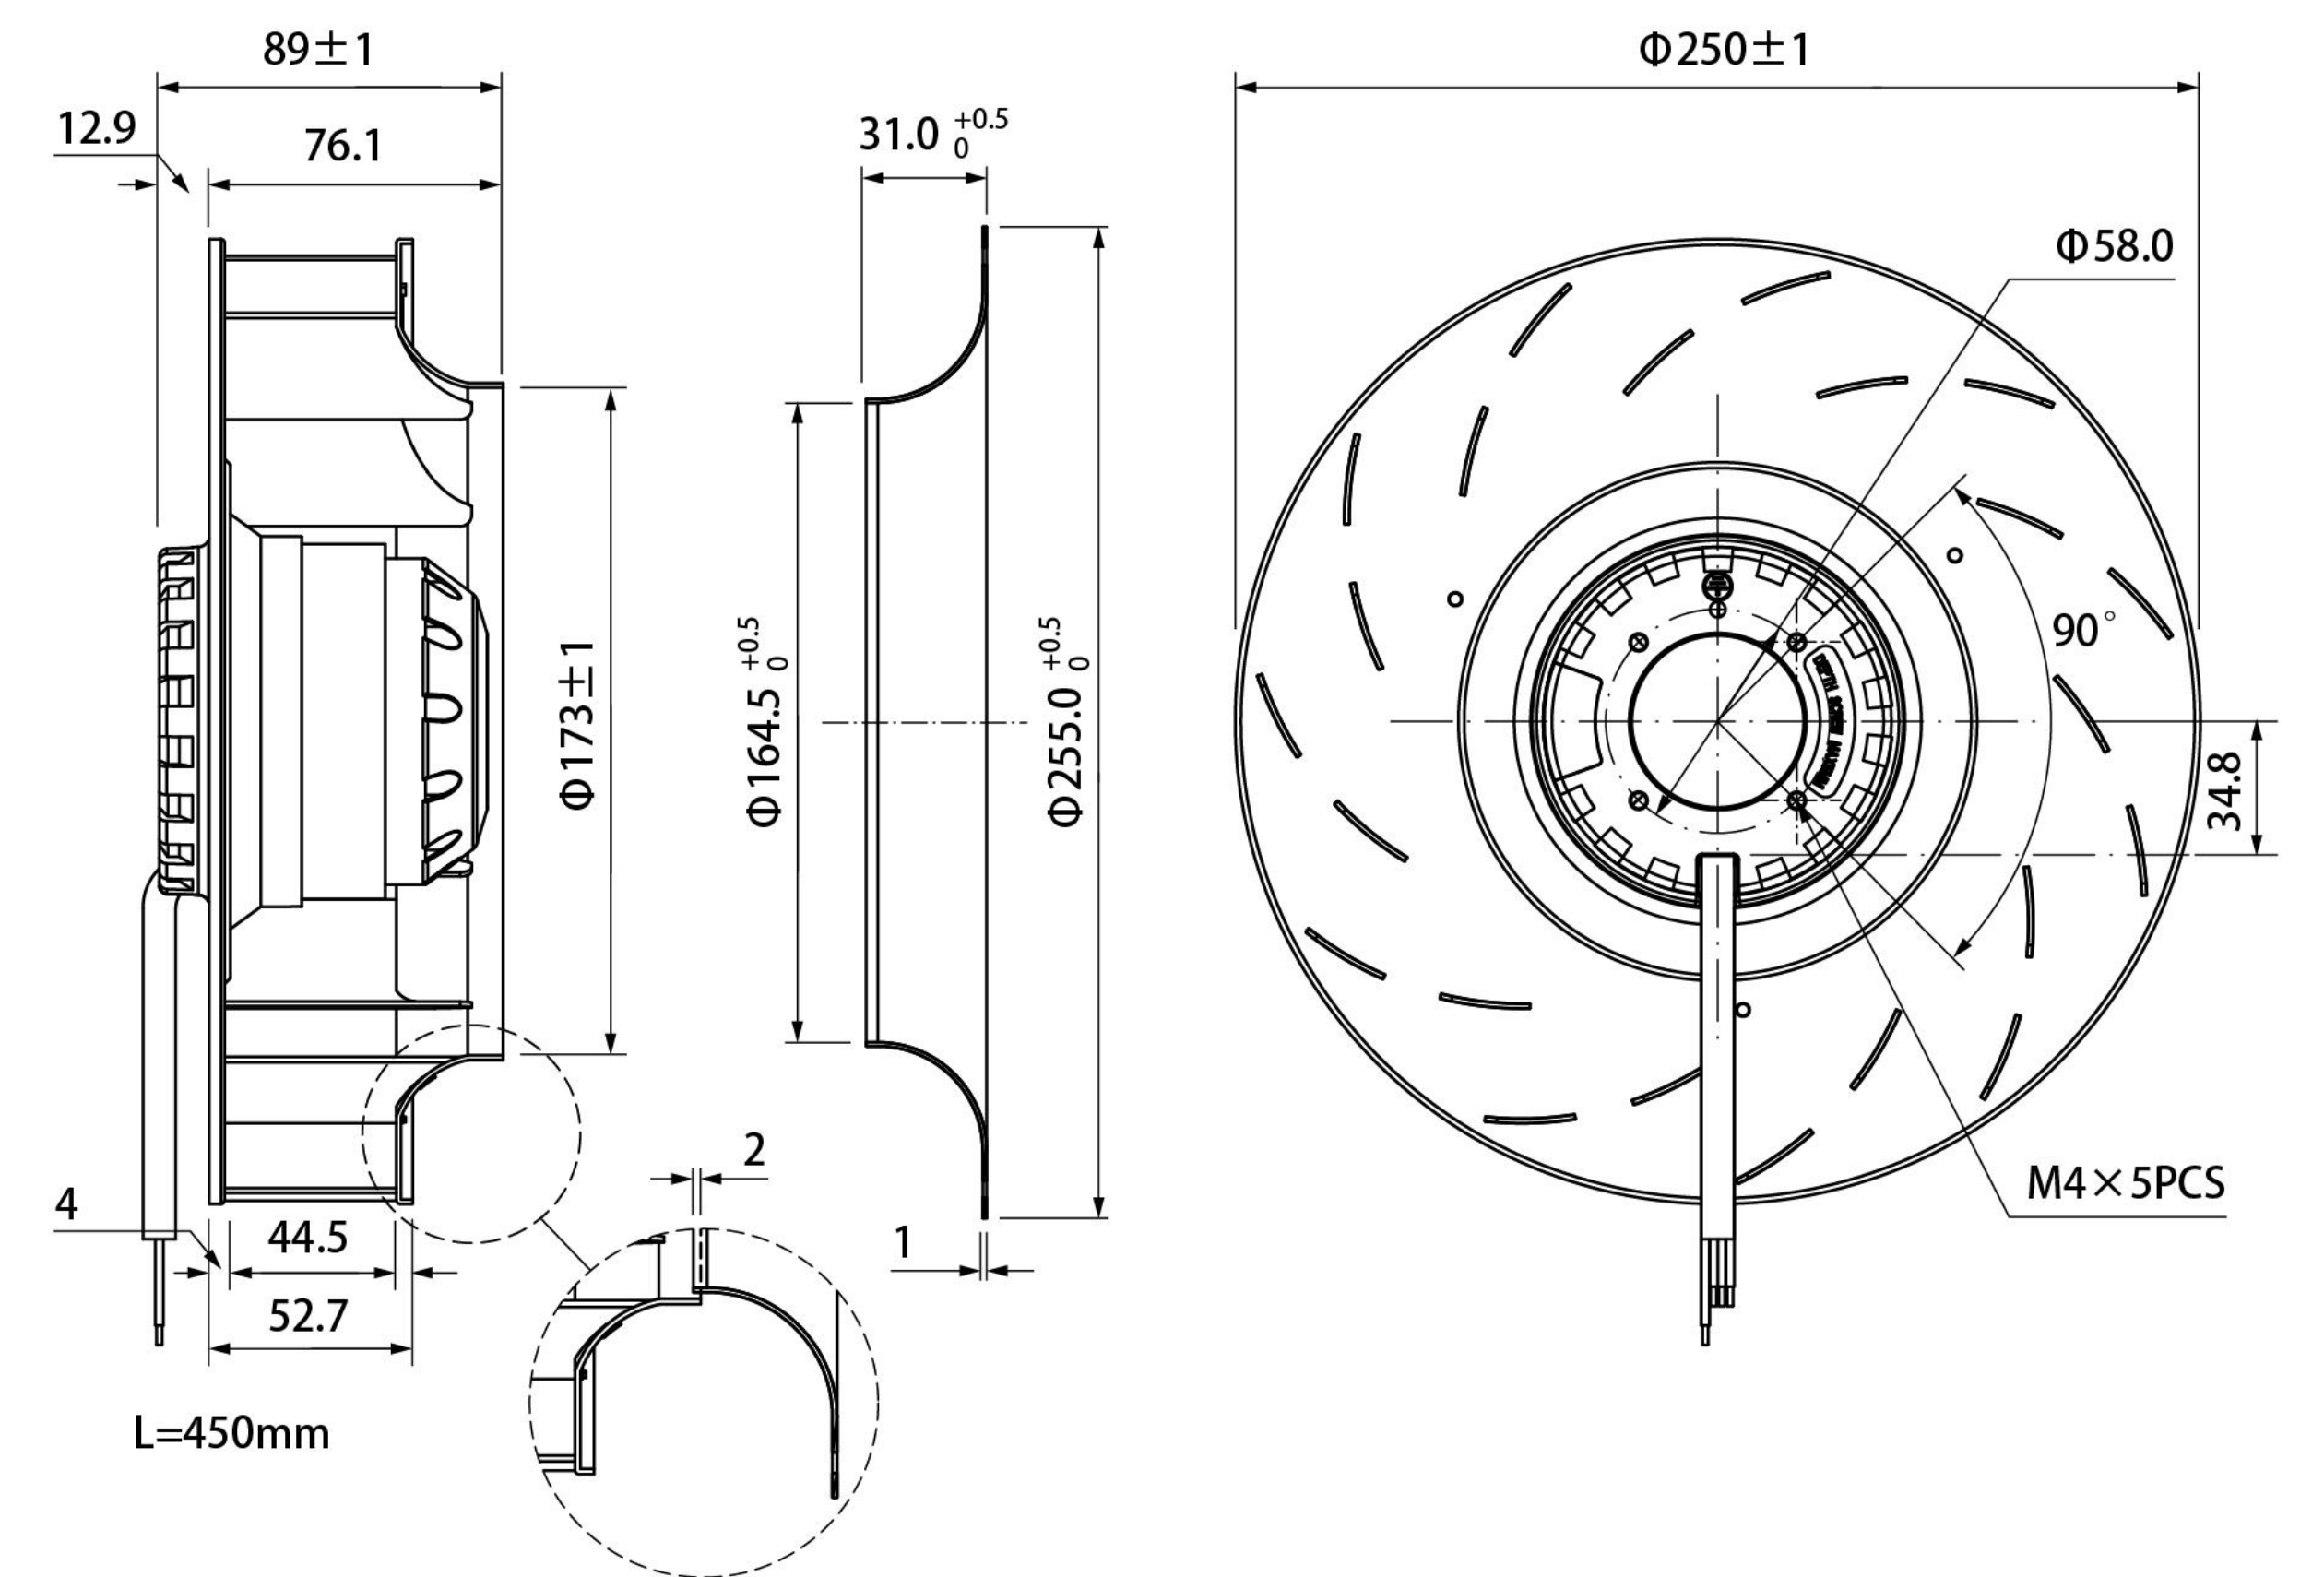

參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KU250AHA(1)1B(OR)	110~120	50/60	1.90/2.15	163/216	2600/2900	773/849	2.63/3.48	79/81	2750
● KU250AHA(1)2B(OR)	220~240	50/60	0.97/1.05	163/211	2600/2900	773/849	2.63/3.48	79/81	2750
● KU250AHA(1)3B(OR)	380~400	50/60	0.57/0.62	155/202	2600/2900	773/849	2.63/3.48	79/81	2750
● KU250AHA(3)3B(OR)	380~400	50/60	0.56/0.48	164/203	2700/3000	803/878	2.73/3.58	80/82	2750

*說明: 表中(1)代表單相, (3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.