

KU-175A DC&EC series



(Φ175 x 68.5 mm)
Φ6.89 x 2.7 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings
葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum
引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

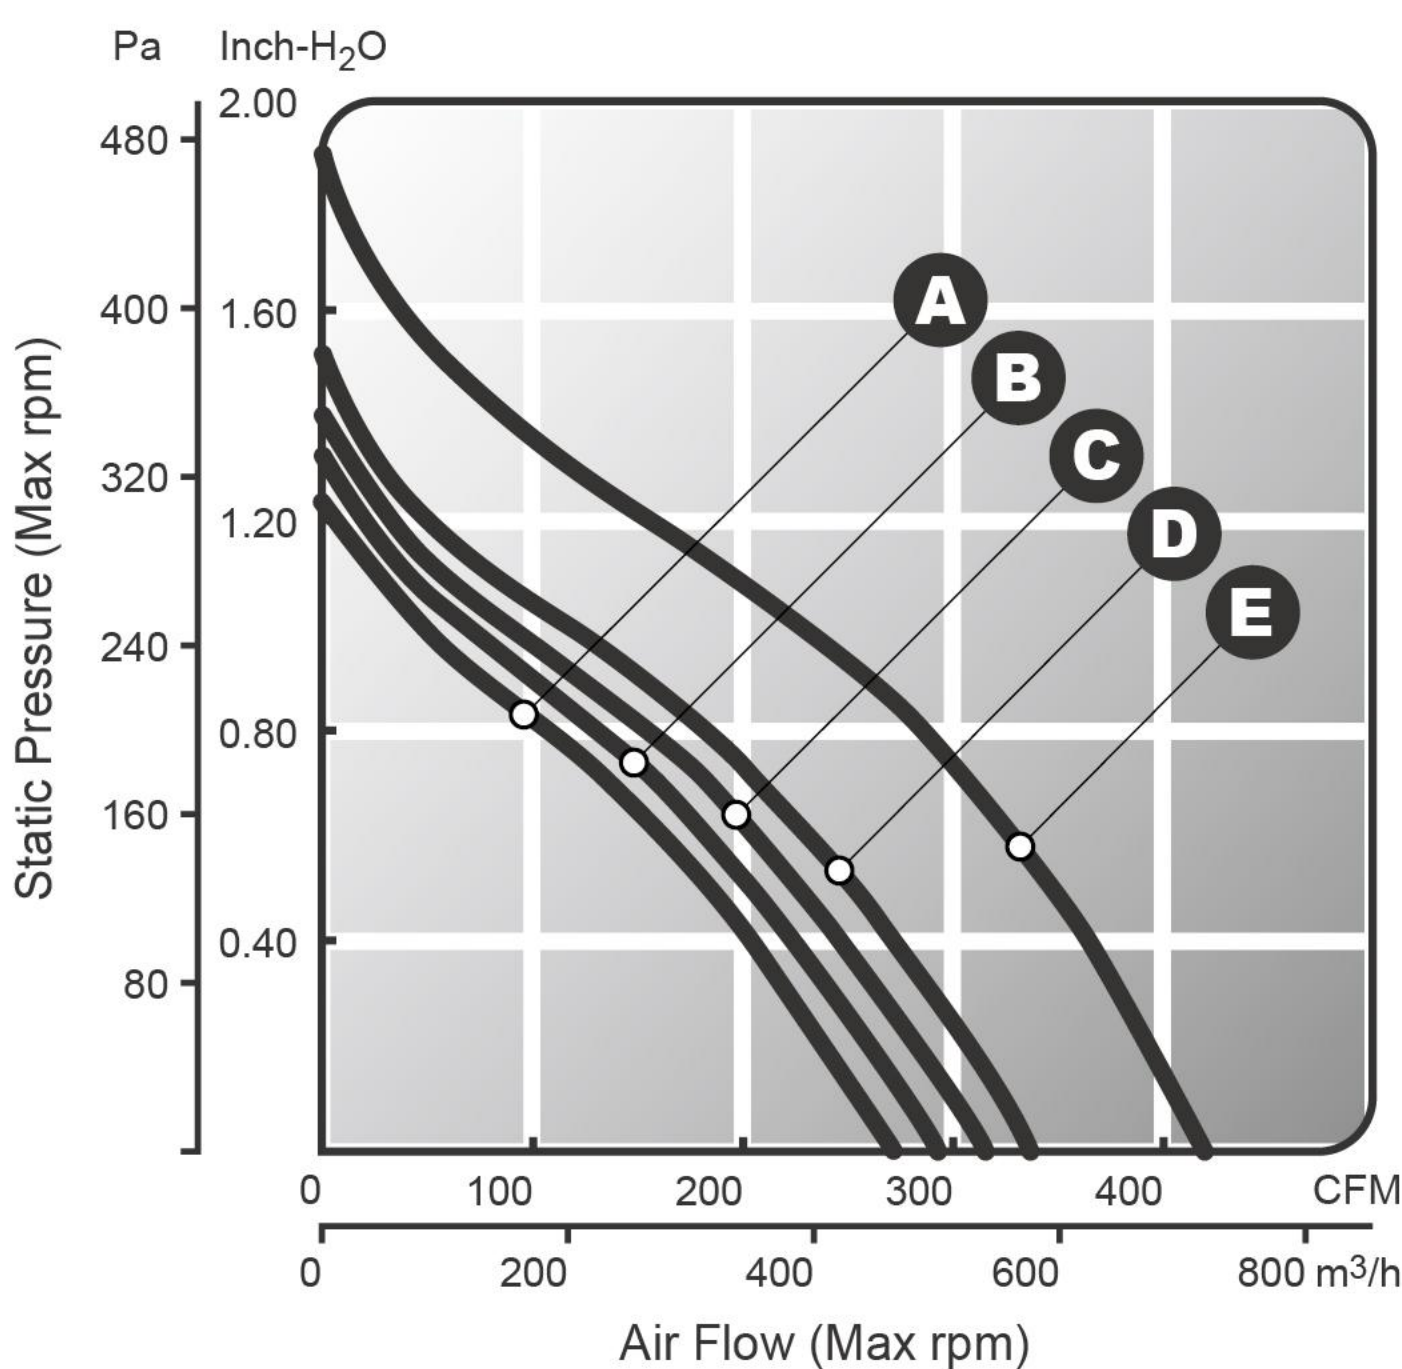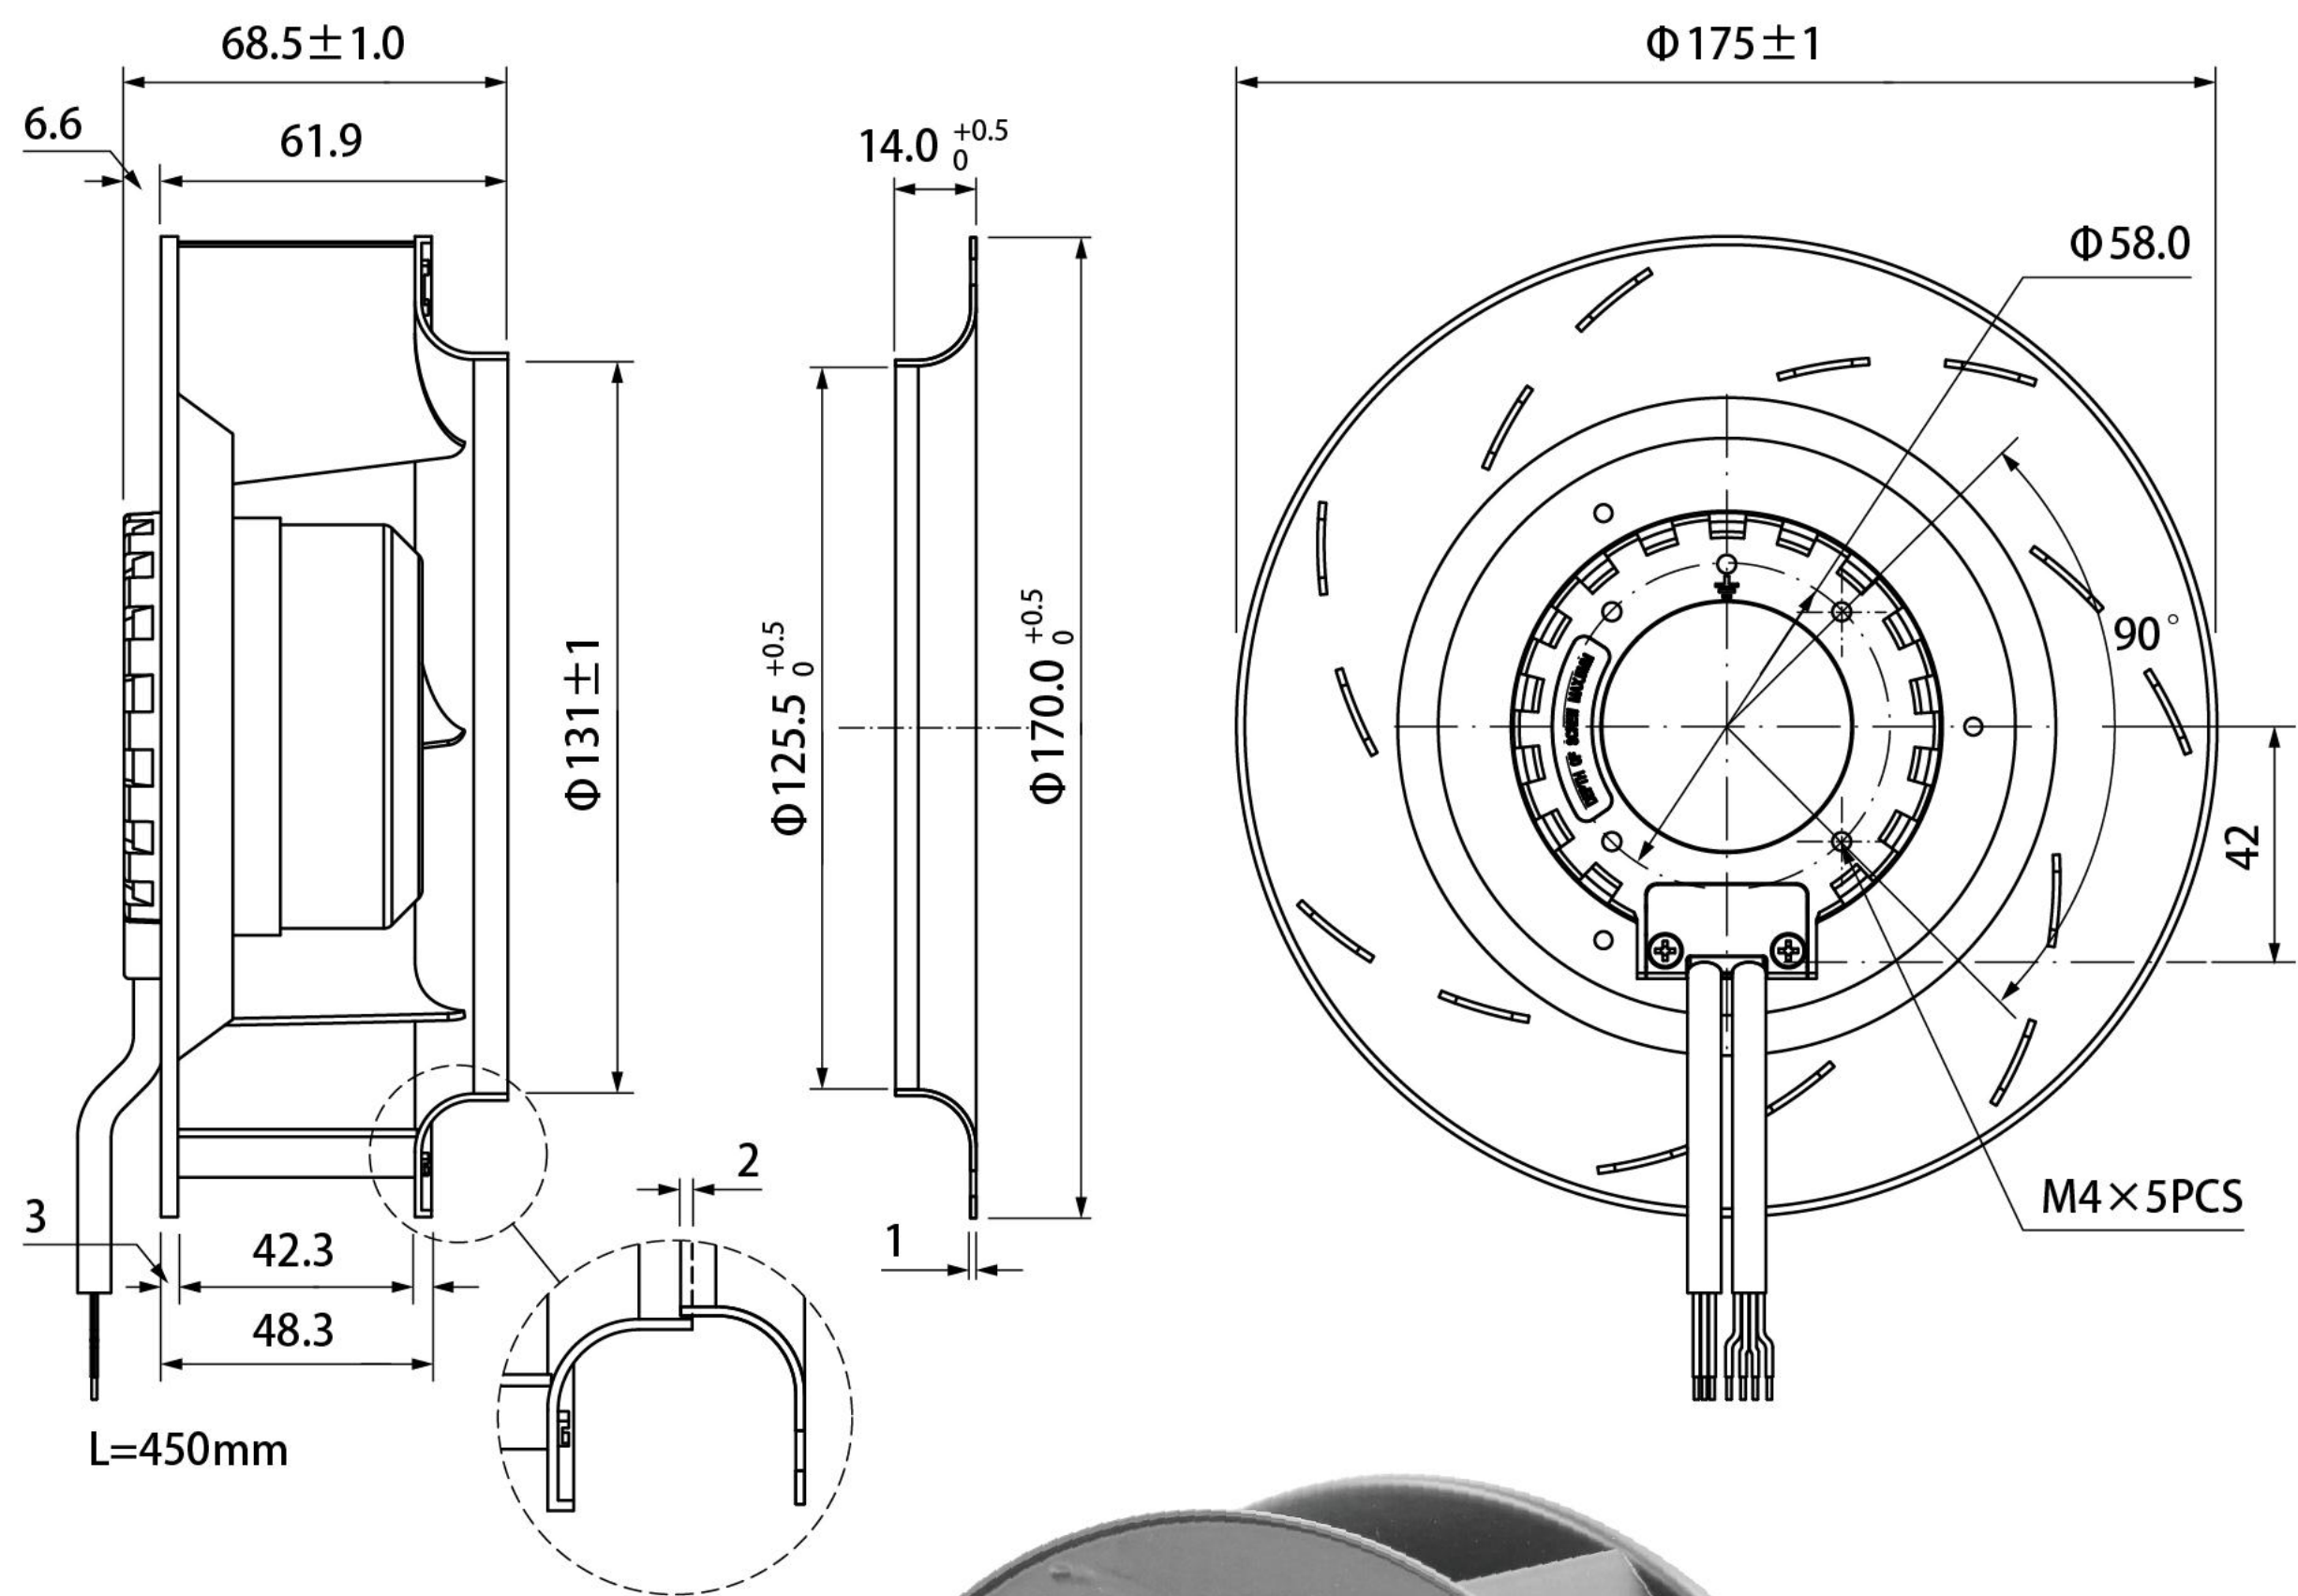

參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dBA)	Weight 重量(g)
B KU175A2800D12B	12VDC	-	2167	26	2800	294	1.34	69	800
D KU175A3200D12B	12VDC	-	3083	37	3200	336	1.53	73	800
B KU175A2800D24B	24VDC	-	1083	26	2800	294	1.34	69	800
D KU175A3200D24B	24VDC	-	1542	37	3200	336	1.53	73	800
B KU175A2800D48B	48VDC	-	542	26	2800	294	1.34	69	800
D KU175A3200D48B	48VDC	-	771	37	3200	336	1.53	73	800
E KU175A4000D48B	48VDC	-	1563	75	4000	420	1.91	79	800
B KU175A2800D110B	110VDC	-	236	26	2800	294	1.34	69	890
D KU175A3200D110B	110VDC	-	336	37	3200	336	1.53	73	890
A KU175A2600E0B	100~240VAC	50~60	420~260	23~25	2600	273	1.24	67	890
C KU175A3000E0B	100~240VAC	50~60	500~280	32~36	3000	315	1.43	69	890

KU-190A DC&EC series



(Φ190 x 68.5 mm)
Φ7.48x 2.7 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings
葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum
引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

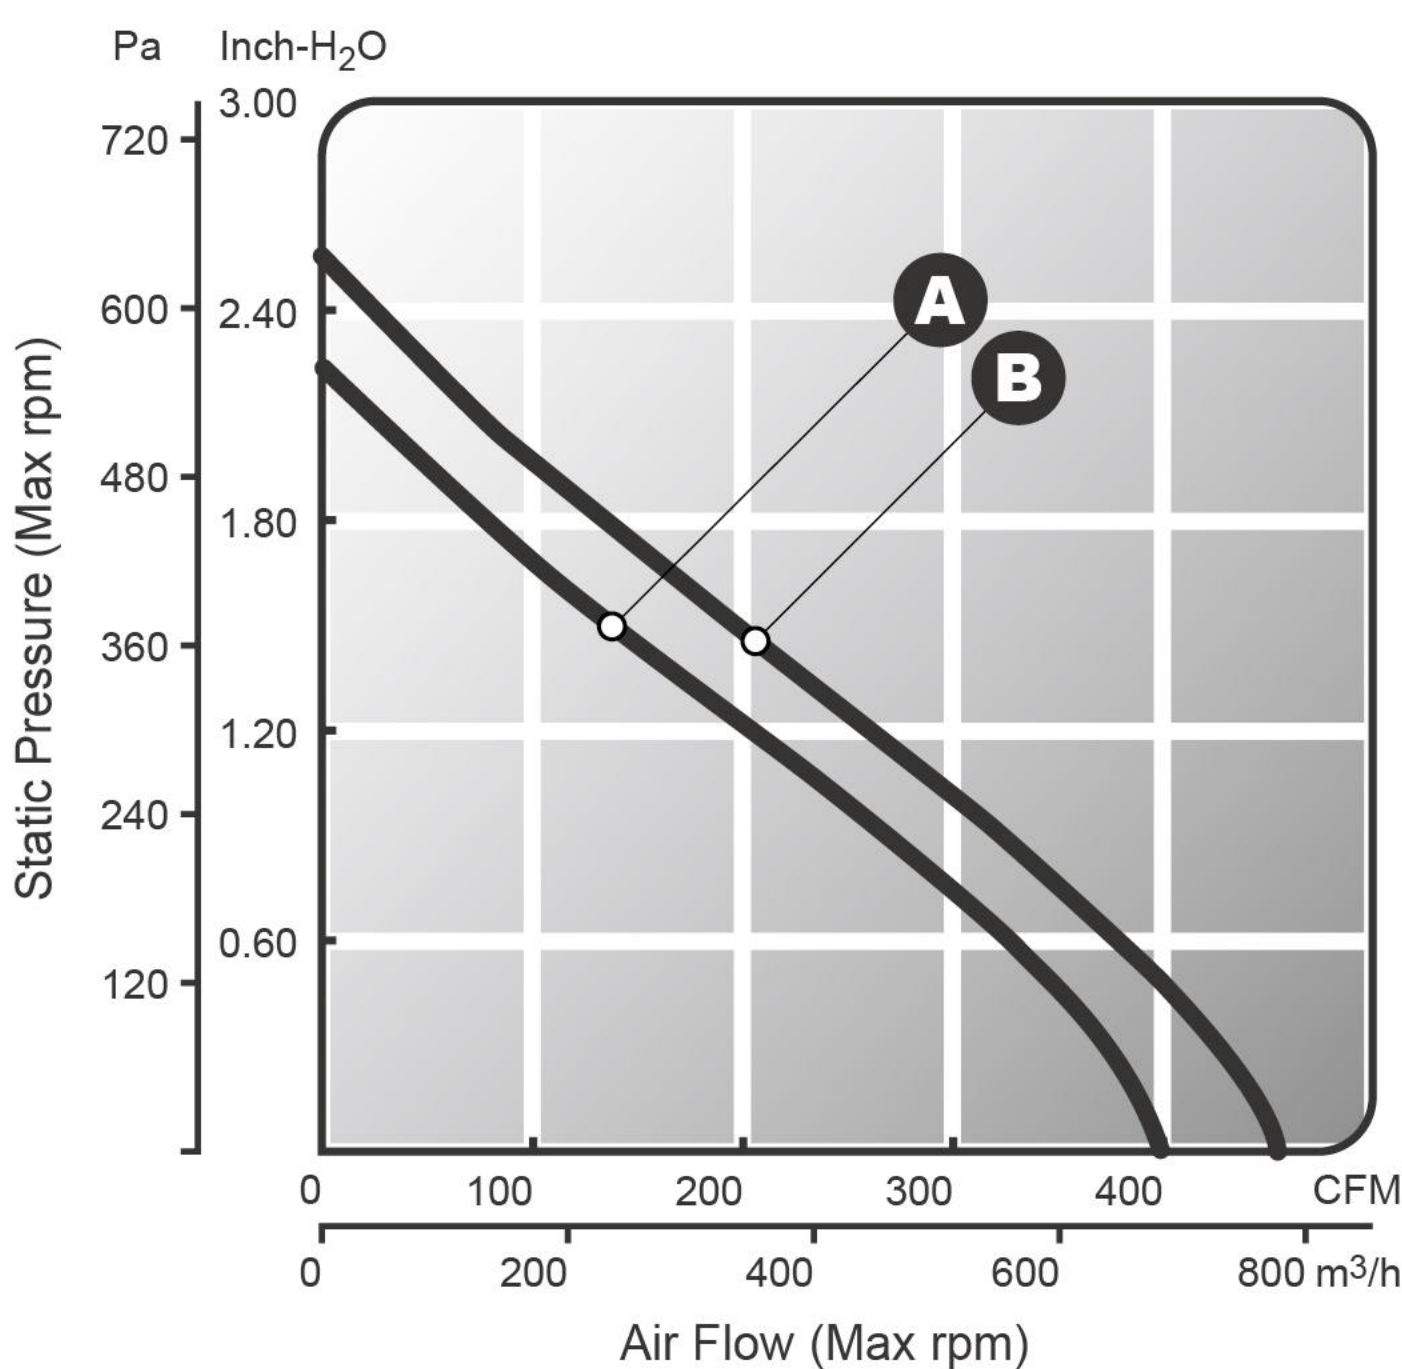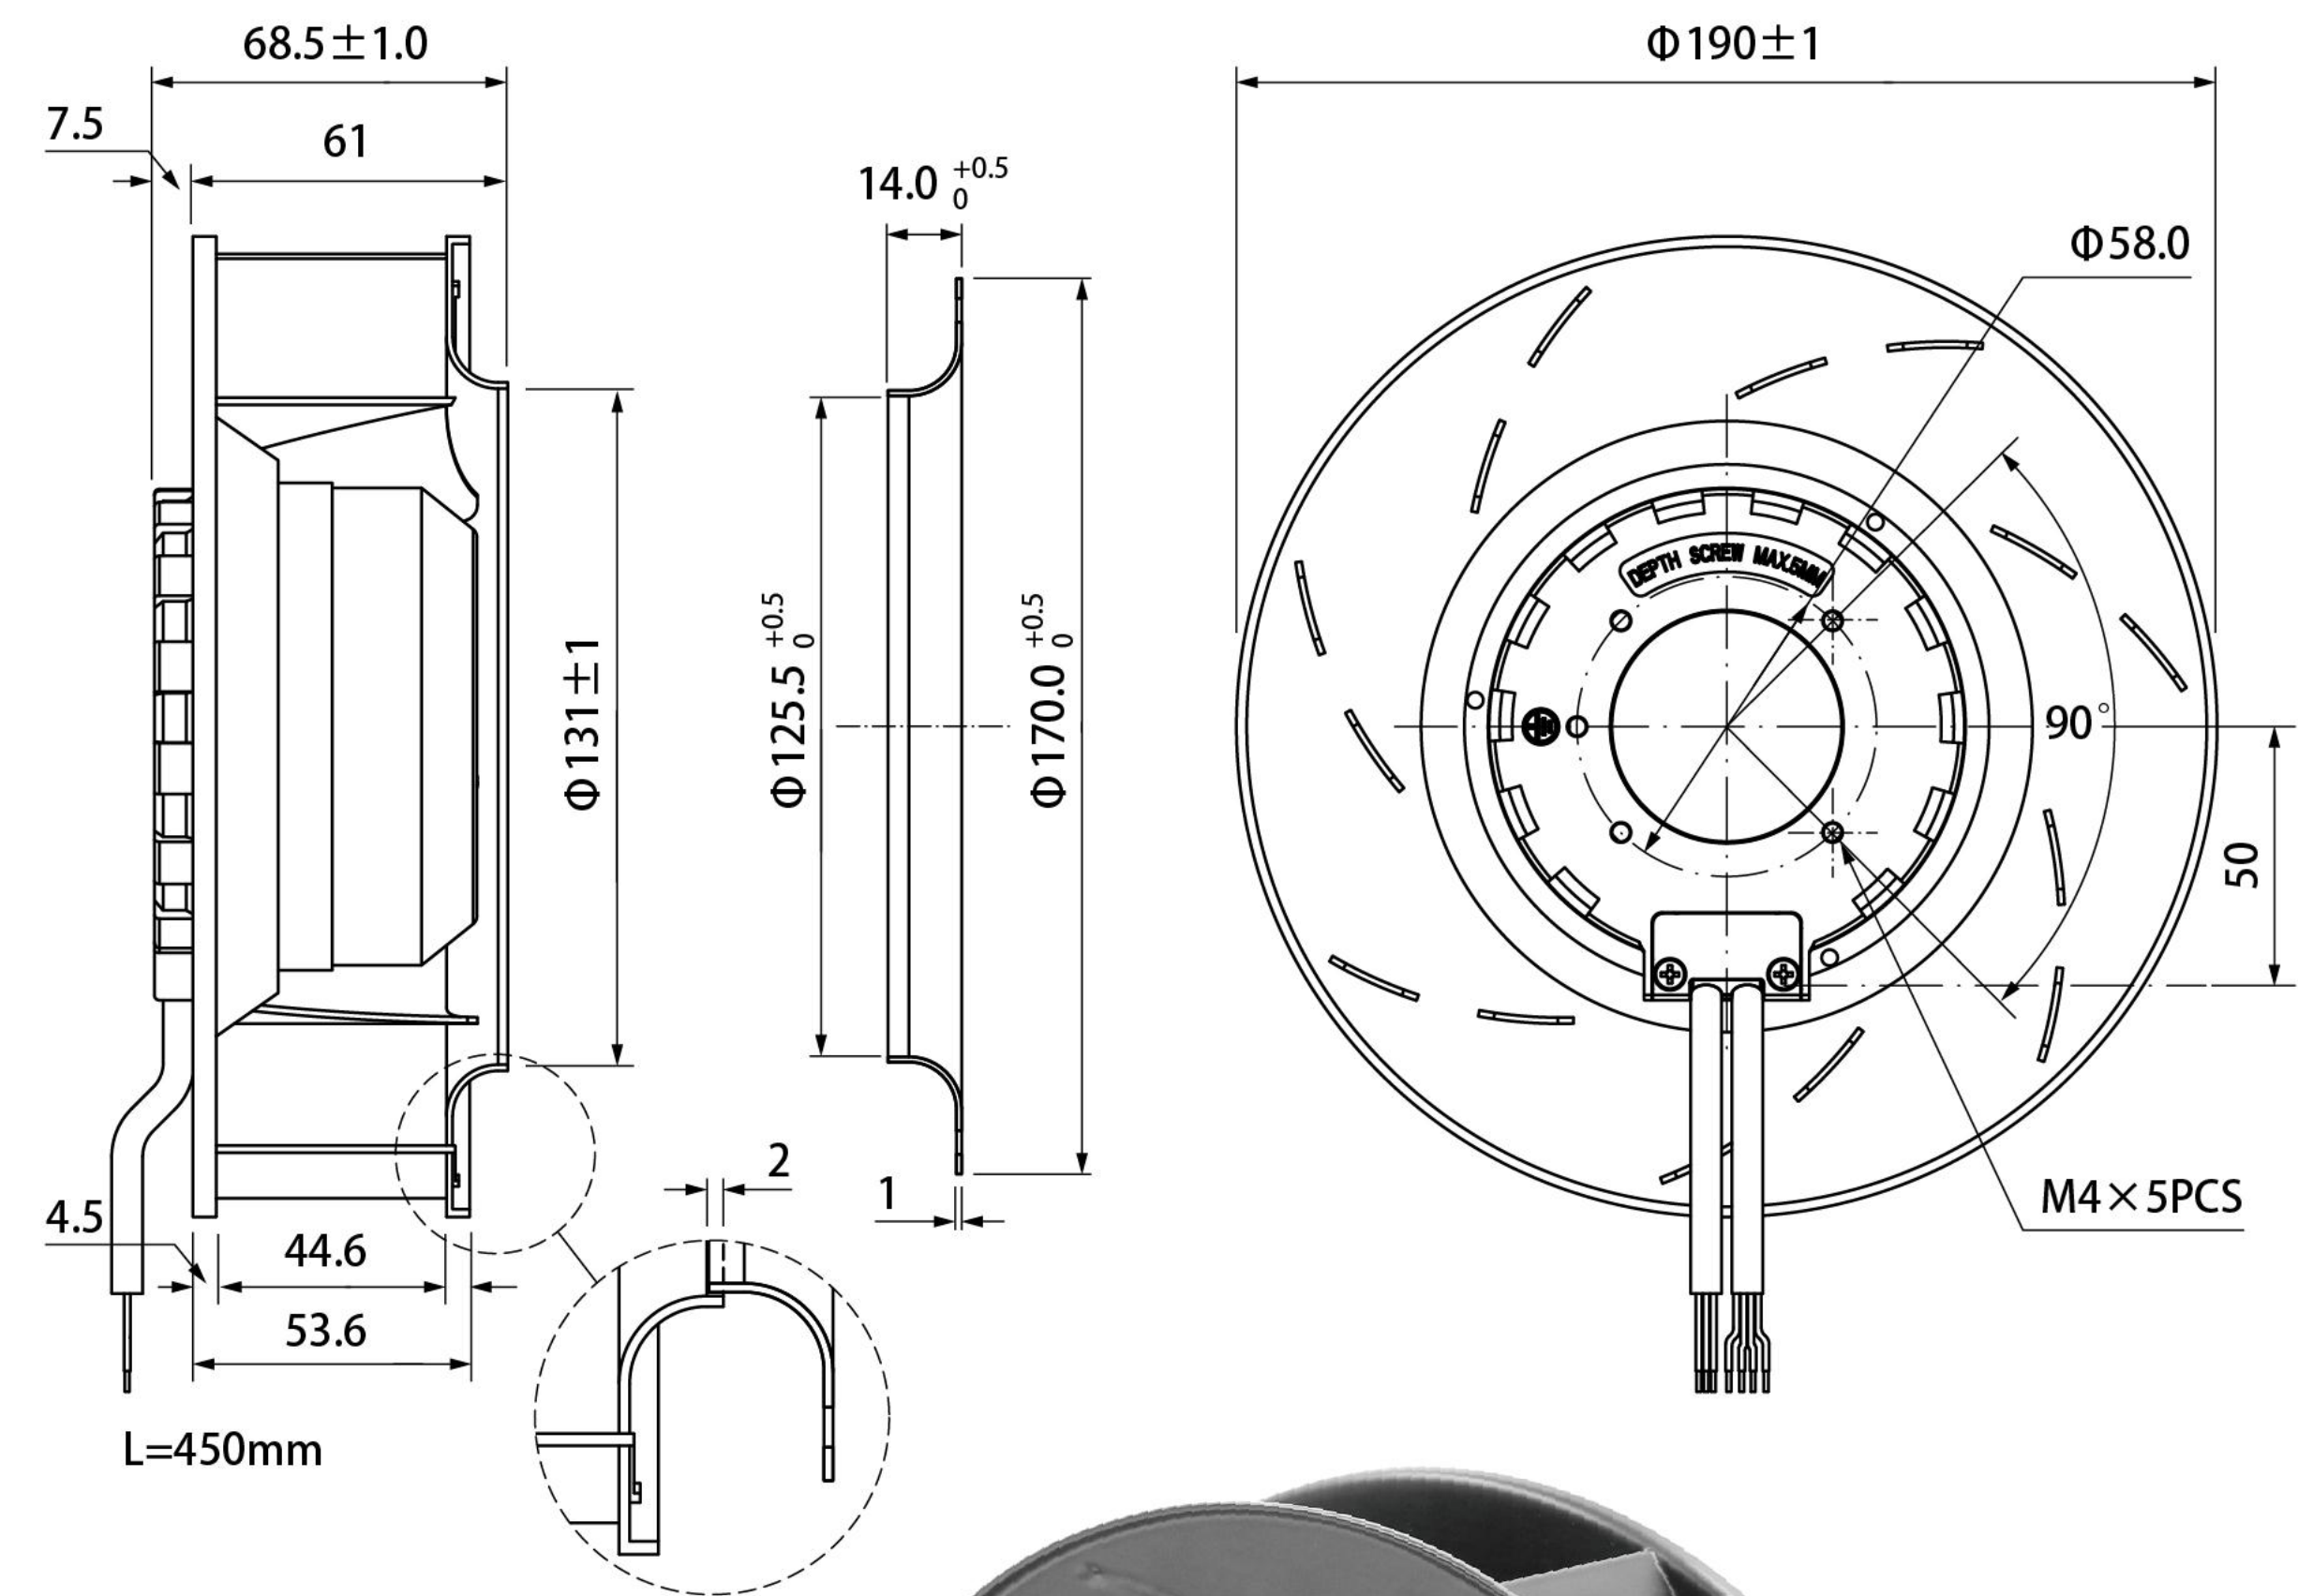

參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dBA)	Weight 重量(g)
A KU190A2800D24B	24VDC	-	2125	51	2800	400	2.24	74	1200
B KU190A3200D24B	24VDC	-	3333	80	3200	457	2.56	77	1200
A KU190A2800D48B	48VDC	-	1063	51	2800	400	2.24	74	1200
B KU190A3200D48B	48VDC	-	1667	80	3200	457	2.56	77	1200
A KU190A2800D110B	110VDC	-	464	51	2800	400	2.24	74	1430
B KU190A3200D110B	110VDC	-	727	80	3200	457	2.56	77	1430
A KU190A2800E1B	115VAC	50~60	670	49	2800	400	2.24	74	1430
B KU190A3200E1B	115VAC	50~60	1030	77	3200	457	2.56	77	1430
A KU190A2800E2B	230VAC	50~60	420	50	2800	400	2.24	74	1430
B KU190A3200E2B	230VAC	50~60	620	77	3200	457	2.56	77	1430