

KU-220A DC&EC series



(Φ220 x 71 mm)
Φ8.66 x 2.8 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings
葉輪 鋁合金板材衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum
引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

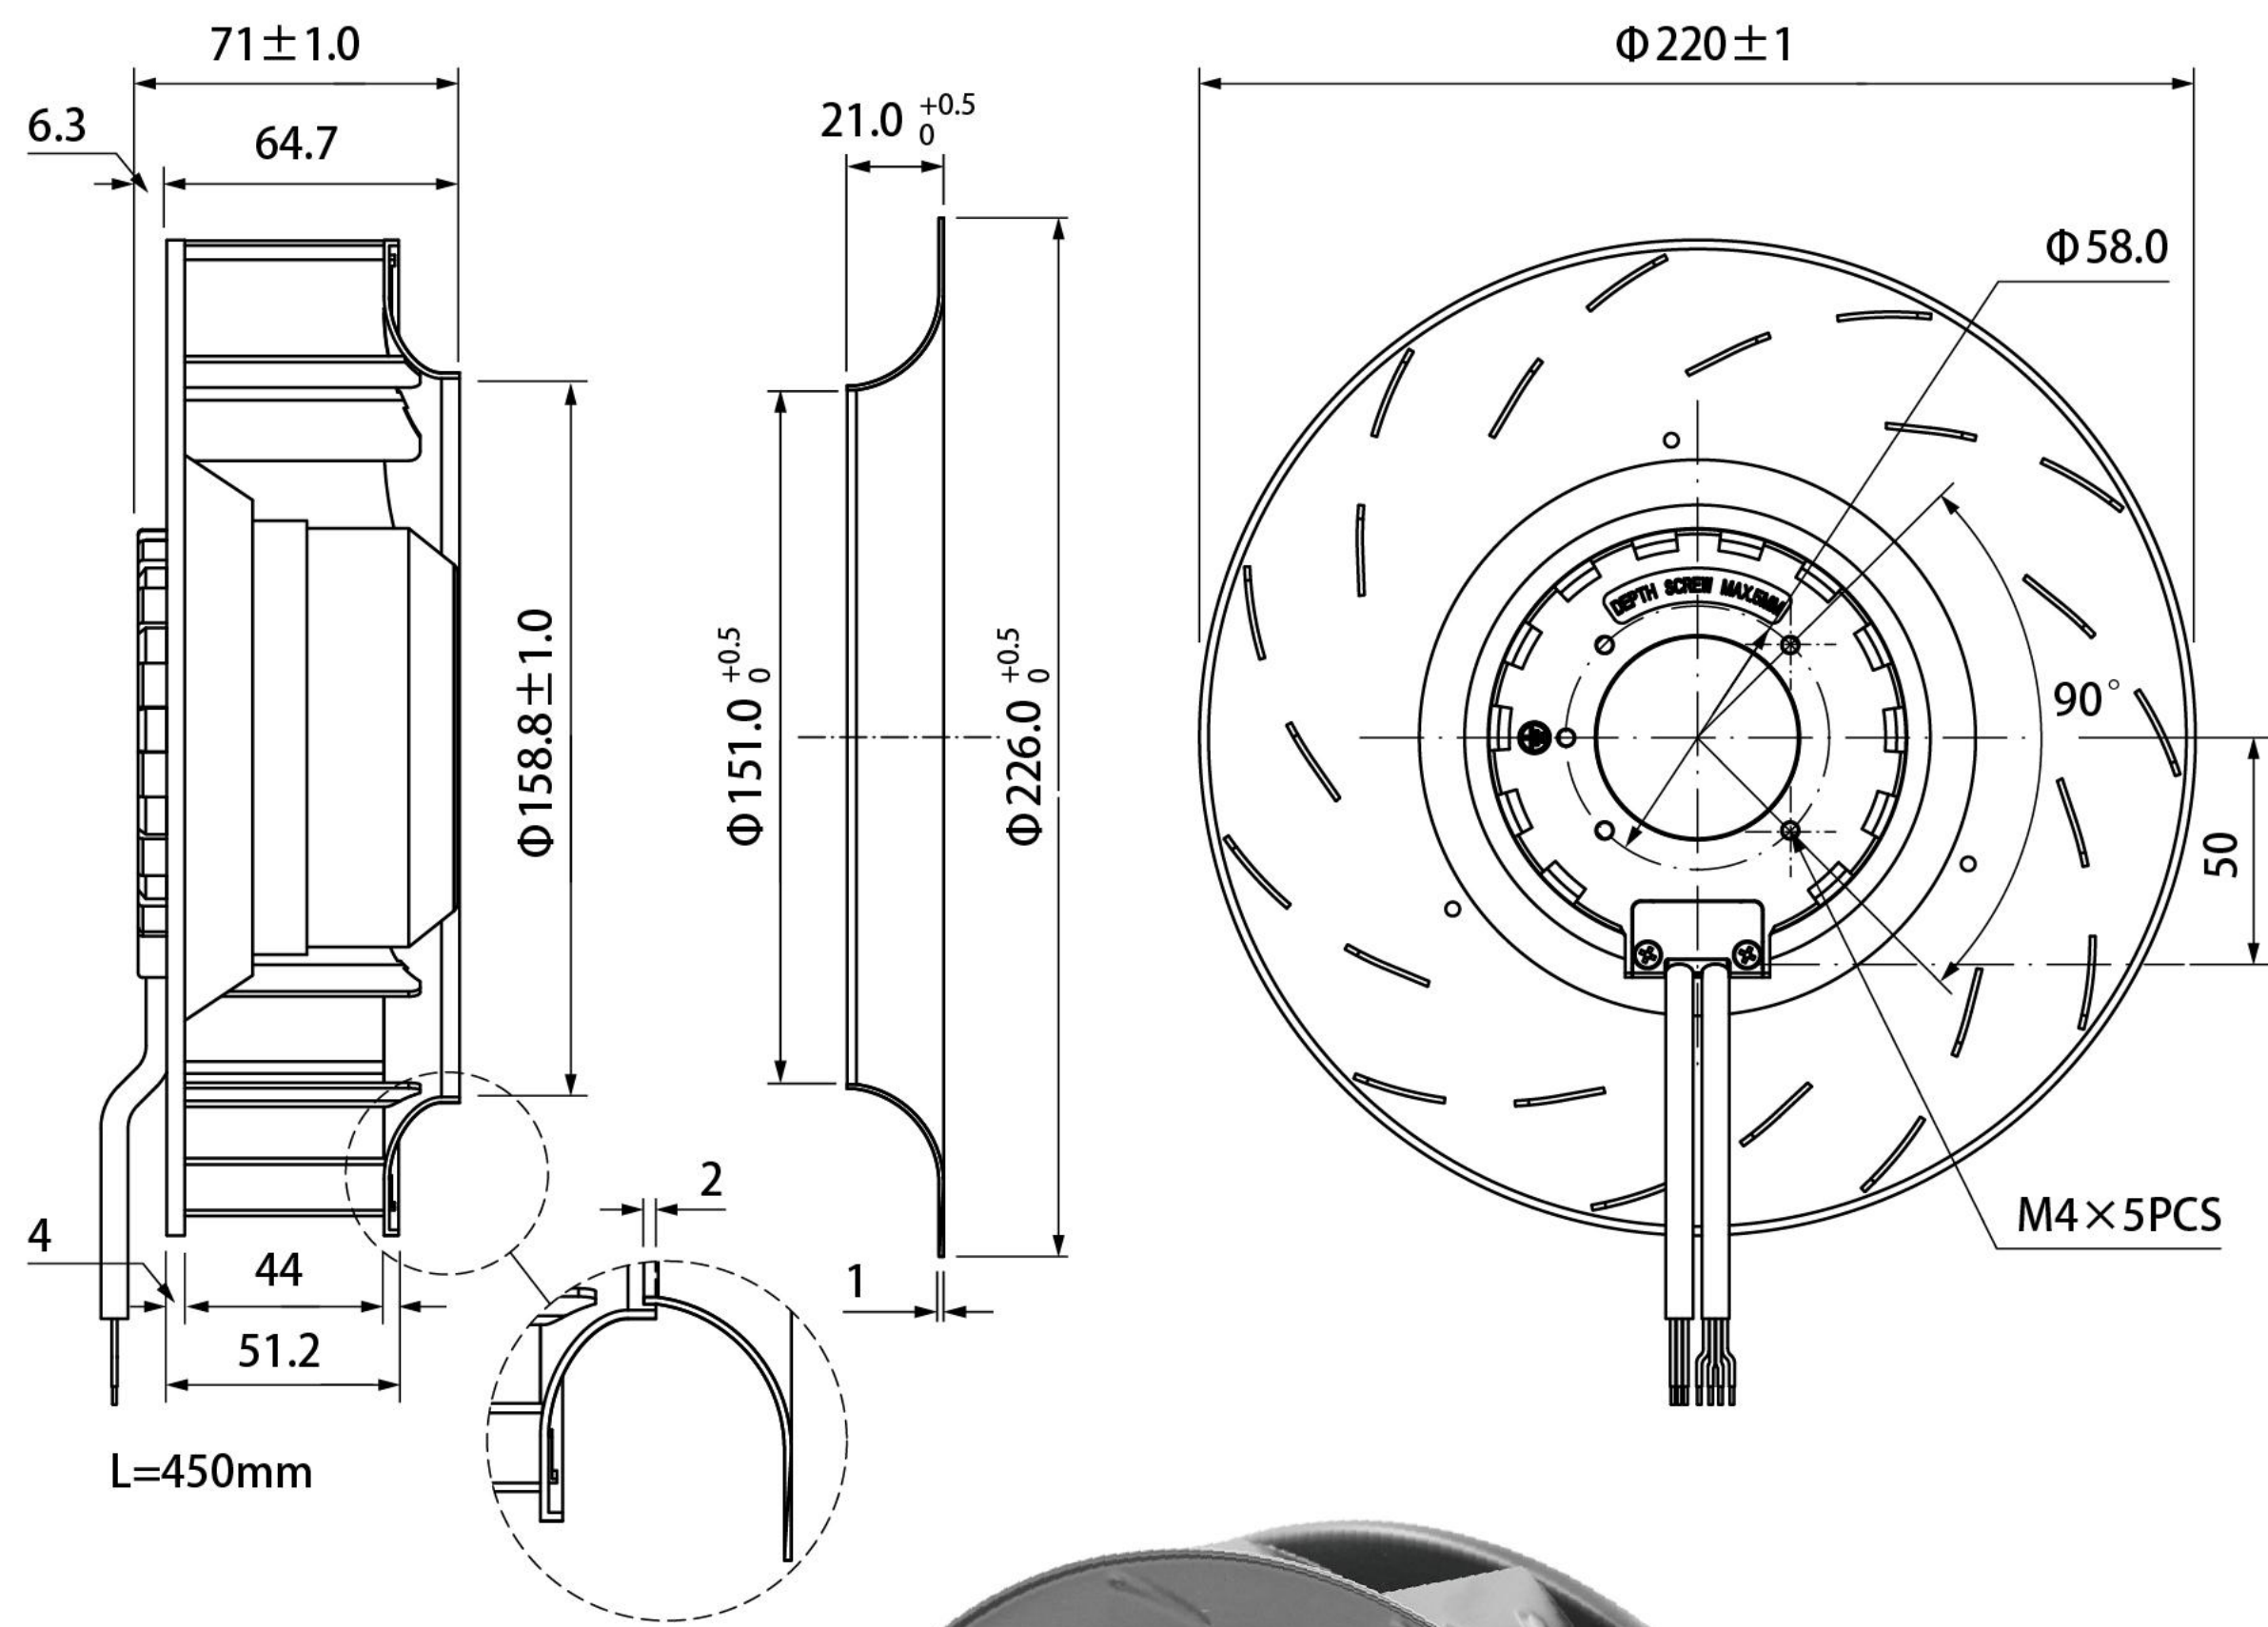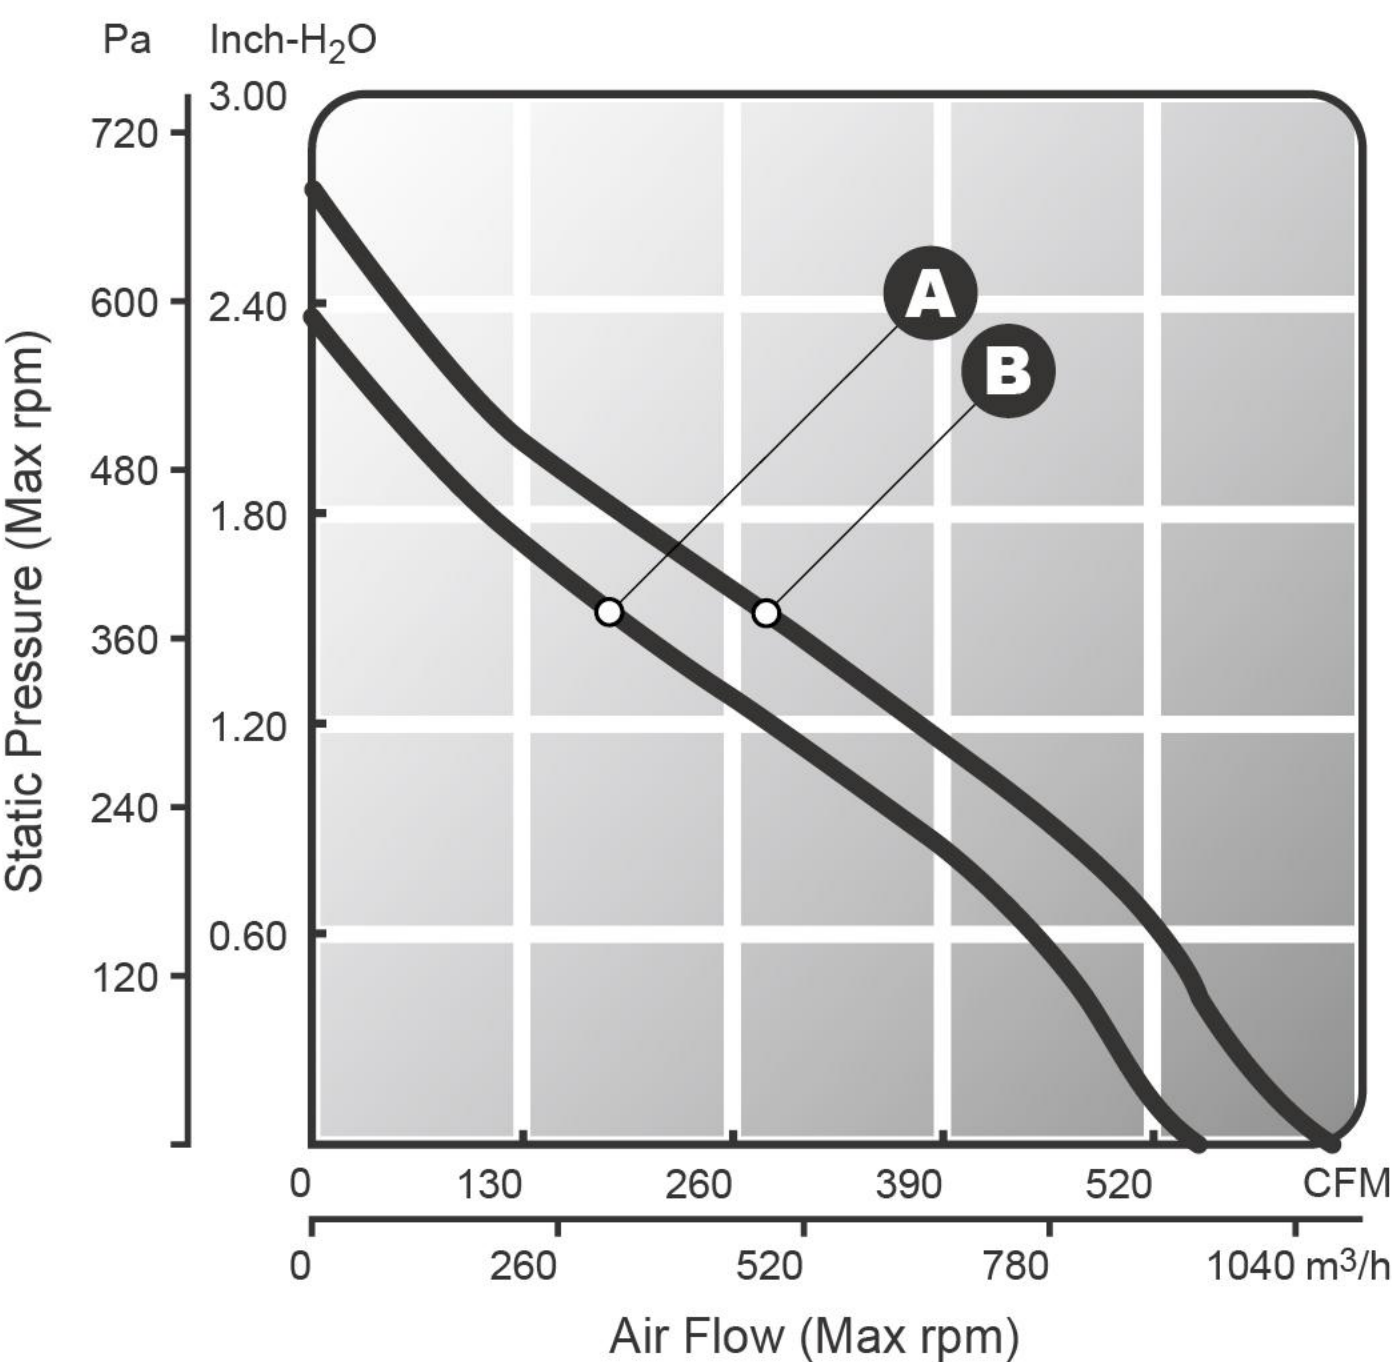

參數表 Specification

	Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
A	KU220A2600D24B	24VDC	-	2500	60	2600	547	2.35	74	1350
B	KU220A3000D24B	24VDC	-	3958	95	3000	631	2.71	78	1350
A	KU220A2600D48B	48VDC	-	1250	60	2600	547	2.35	74	1350
B	KU220A3000D48B	48VDC	-	1979	95	3000	631	2.71	78	1350
A	KU220A2600D110B	110VDC	-	545	60	2600	547	2.35	74	1580
B	KU220A3000D110B	110VDC	-	864	95	3000	631	2.71	78	1580
A	KU220A2600E1B	115VAC	50~60	840	62	2600	547	2.35	74	1580
B	KU220A3000E1B	115VAC	50~60	1330	100	3000	631	2.71	78	1580
A	KU220A2600E2B	230VAC	50~60	480	60	2600	547	2.35	74	1580
B	KU220A3000E2B	230VAC	50~60	790	100	3000	631	2.71	78	1580

KU-225A DC&EC series



(Φ225 x 85 mm)
Φ8.86 x 3.35 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings
葉輪 鋁合金板材衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum
引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

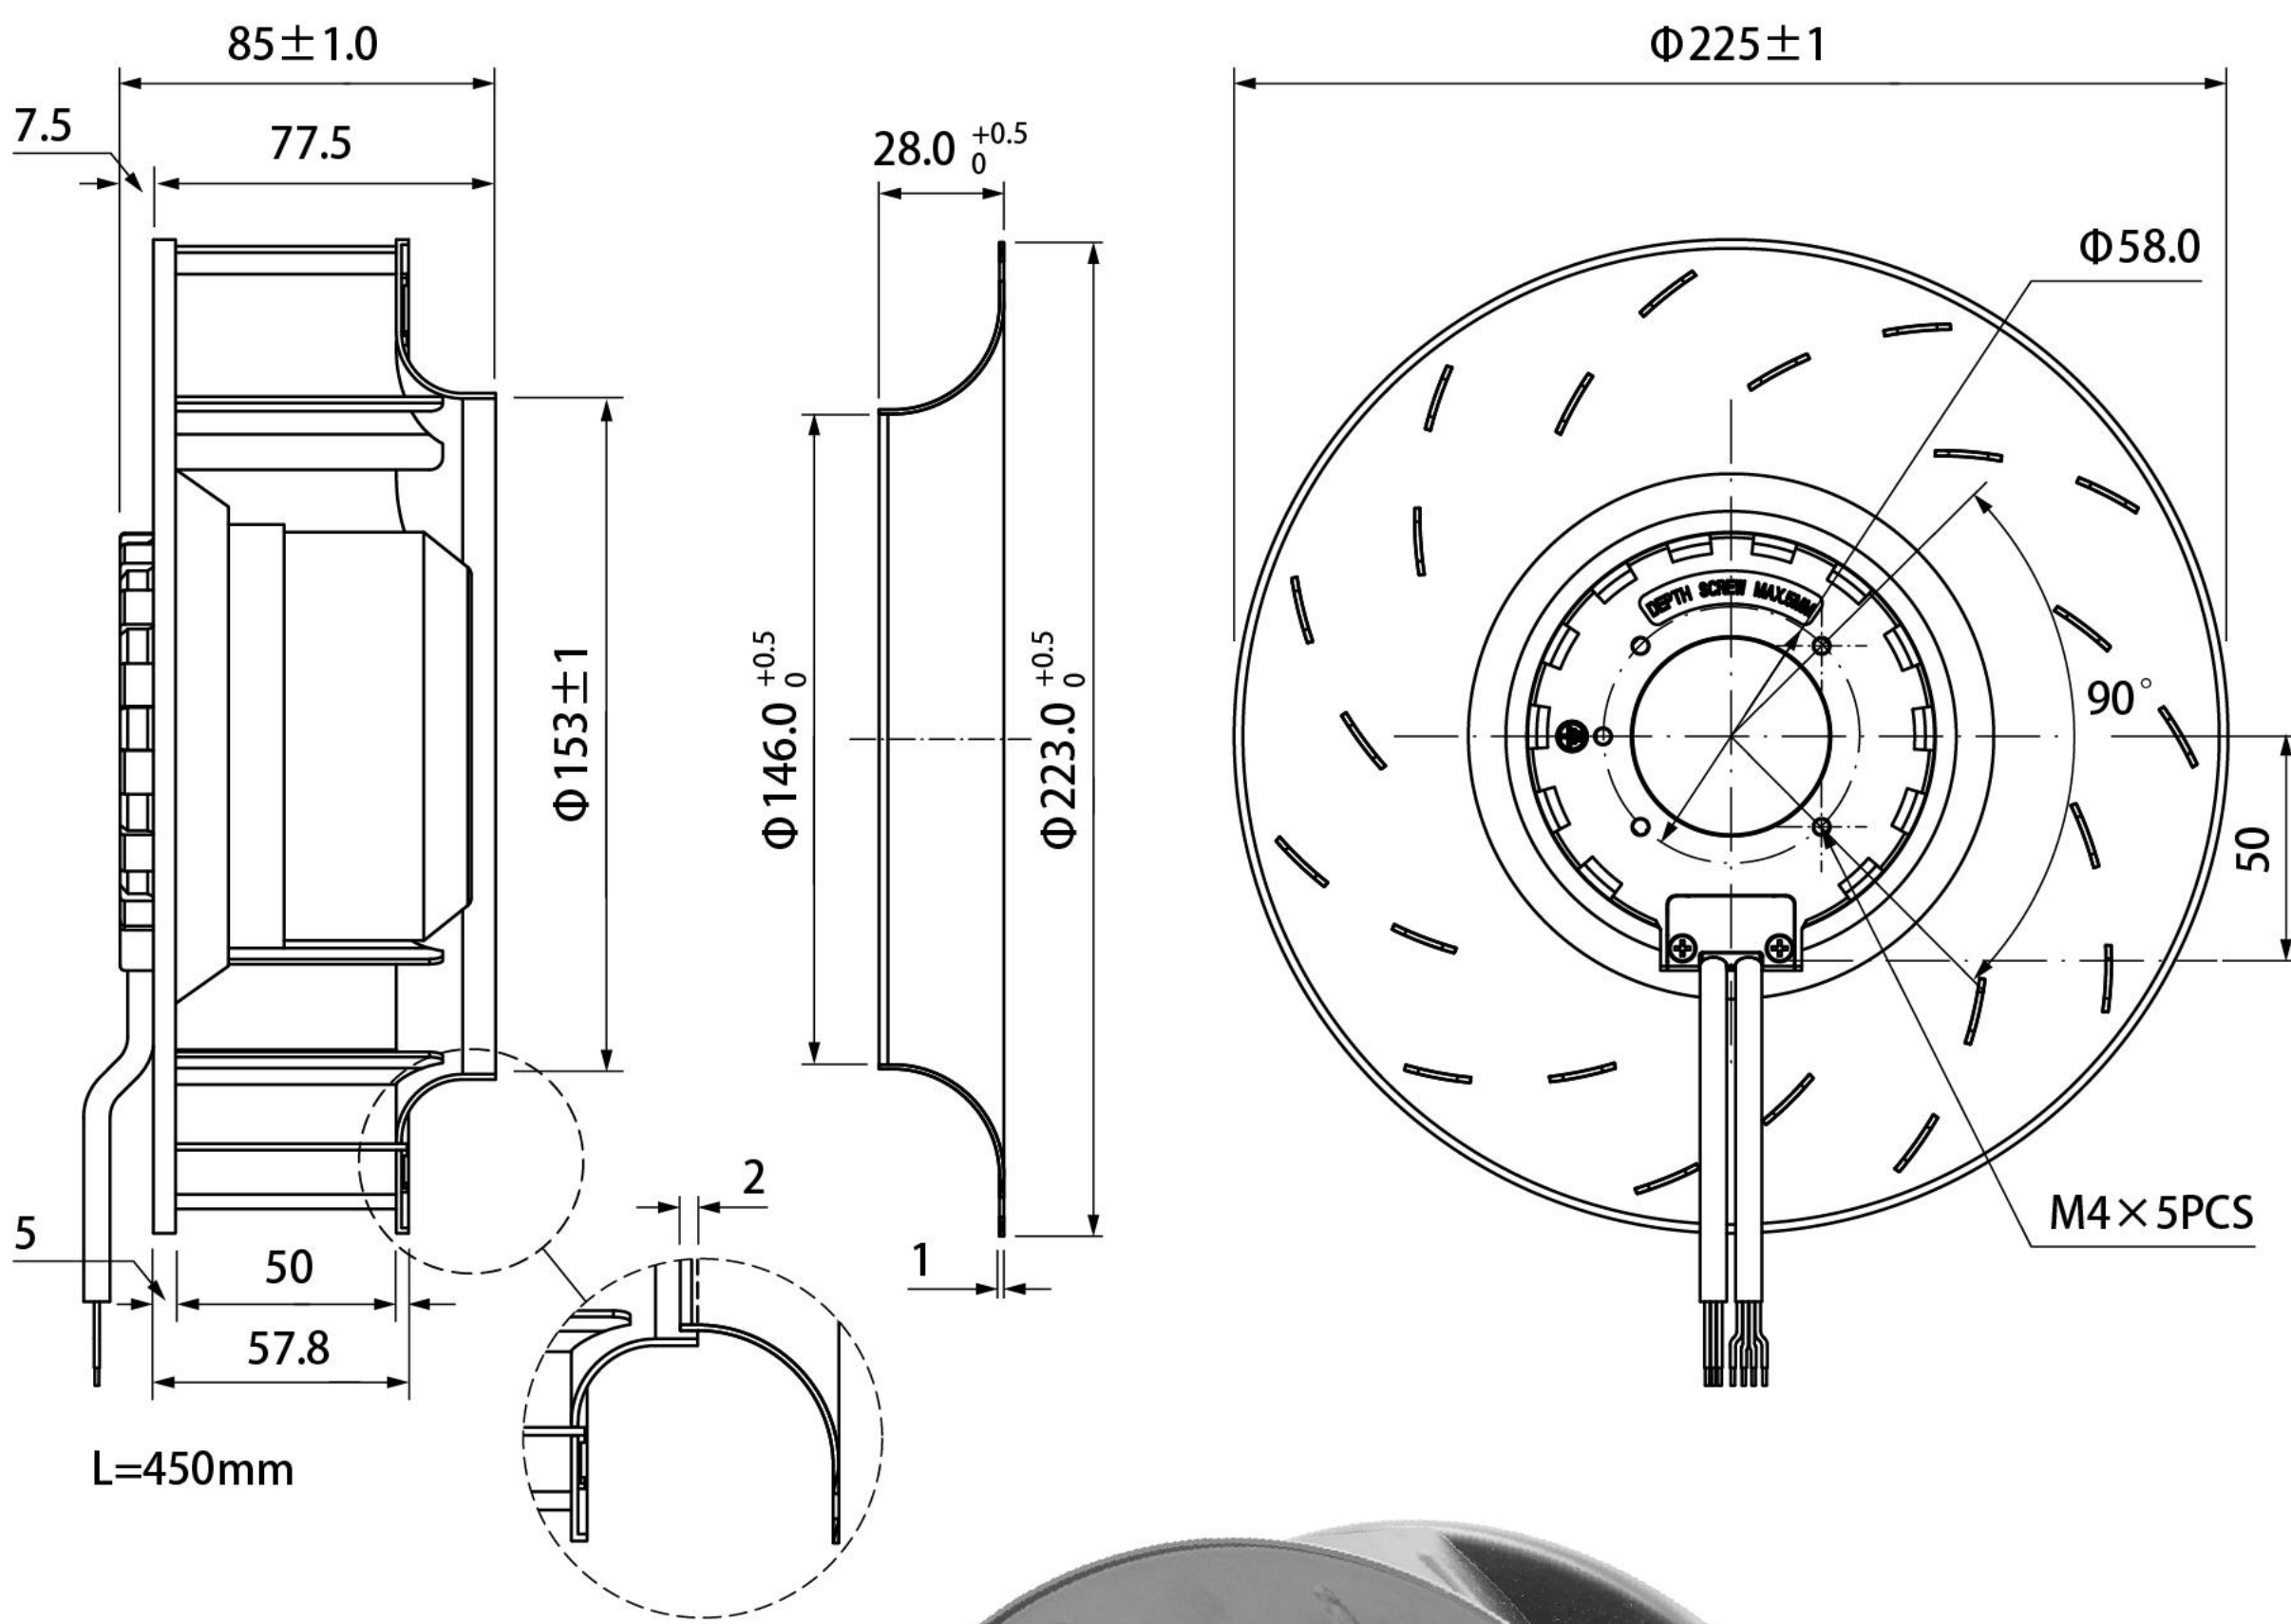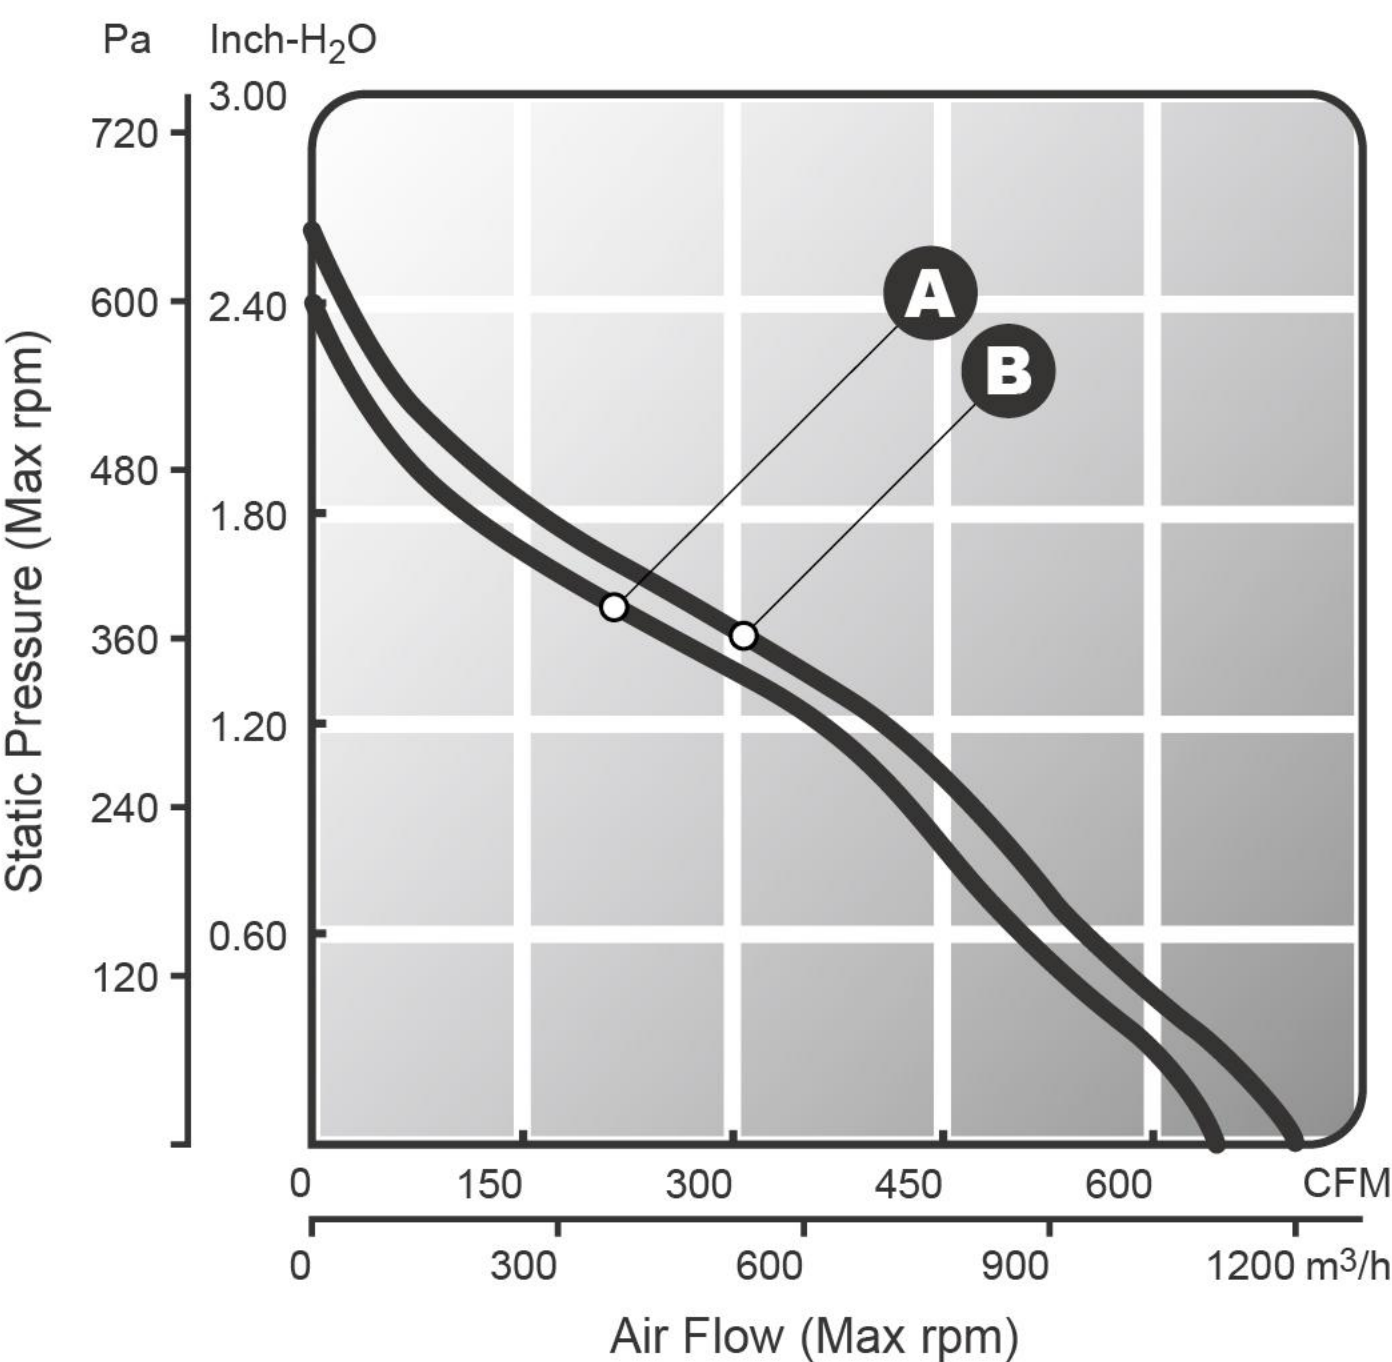

參數表 Specification

	Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
A	KU225A2400D24B	24VDC	-	3417	82	2400	606	2.36	75	1800
B	KU225A2600D24B	24VDC	-	4167	100	2600	657	2.56	77	1800
A	KU225A2400D48B	48VDC	-	1708	82	2400	606	2.36	75	1800
B	KU225A2600D48B	48VDC	-	2083	100	2600	657	2.56	77	1800
A	KU225A2400D110B	110VDC	-	745	82	2400	606	2.36	75	2030
B	KU225A2600D110B	110VDC	-	909	100	2600	657	2.56	77	2030
A	KU225A2400E1B	115VAC	50~60	1160	84	2400	606	2.36	75	2030
B	KU225A2600E1B	115VAC	50~60	1380	104	2600	657	2.56	77	2030
A	KU225A2400E2B	230VAC	50~60	670	83	2400	606	2.36	75	2030
B	KU225A2600E2B	230VAC	50~60	770	103	2600	657	2.56	77	2030