

KU-225B DC&EC series



(Φ225 x 99 mm)
Φ8.86 x 3.9 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings
葉輪 鋁合金板材衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum
引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

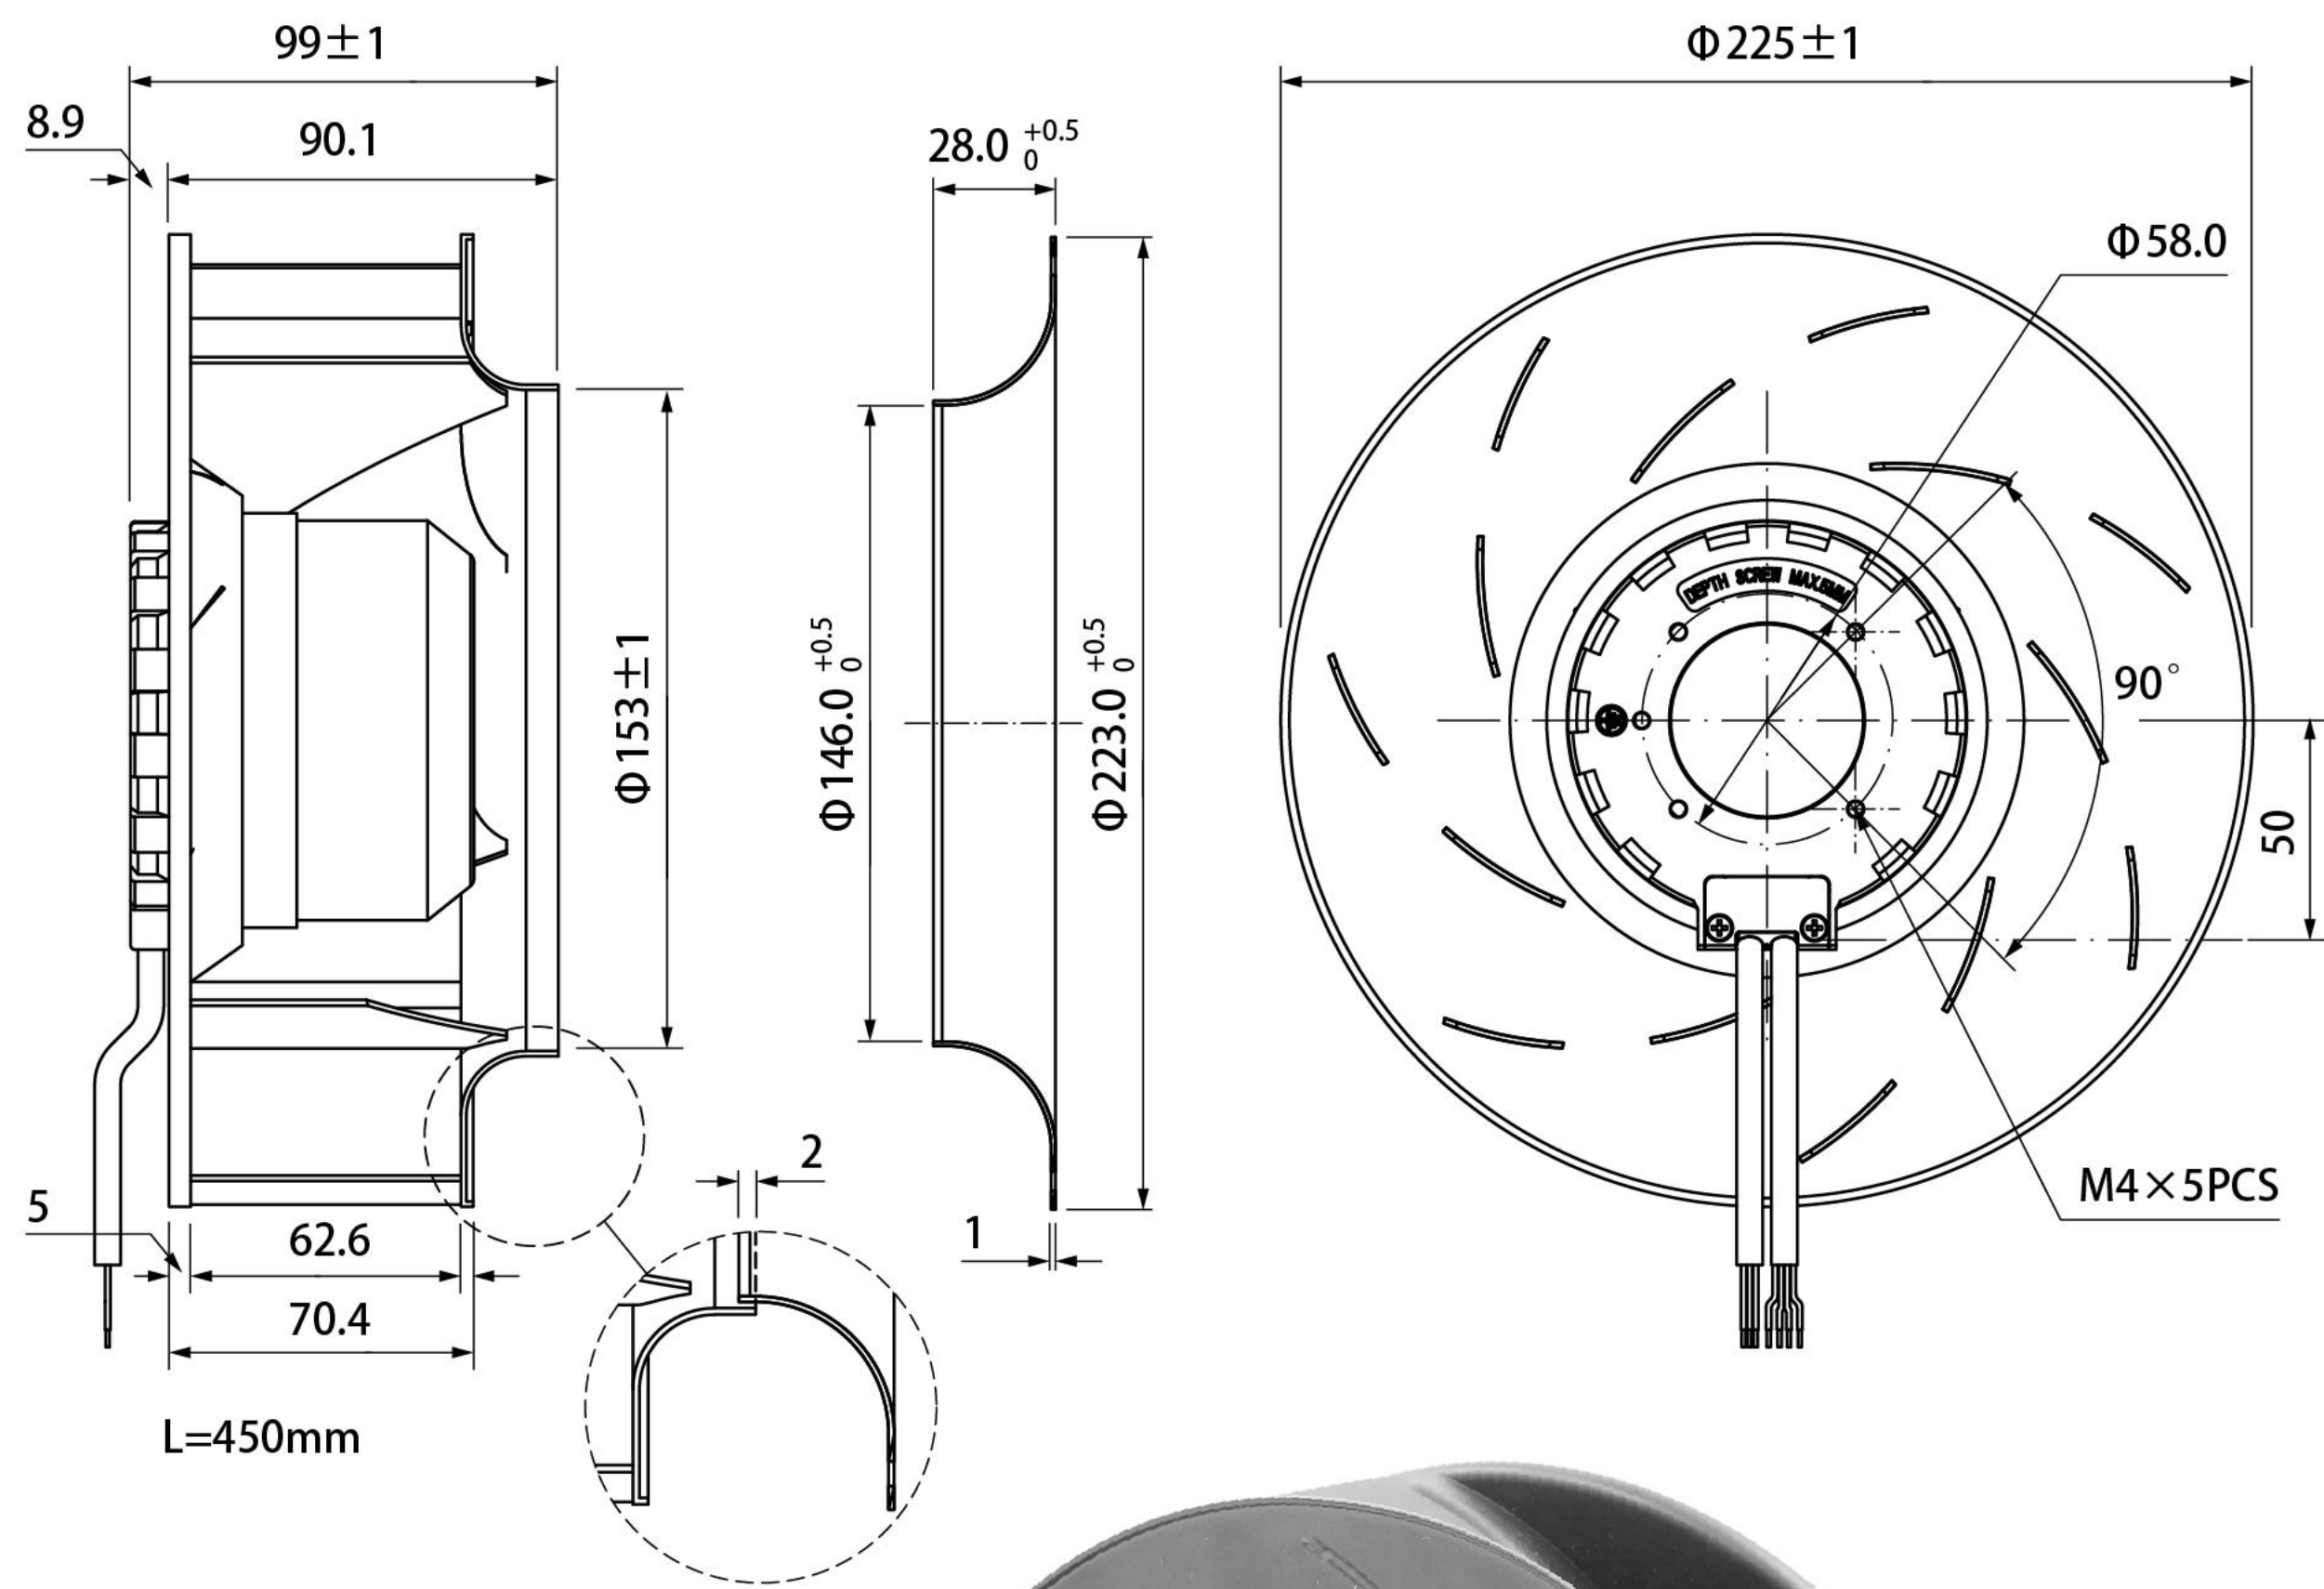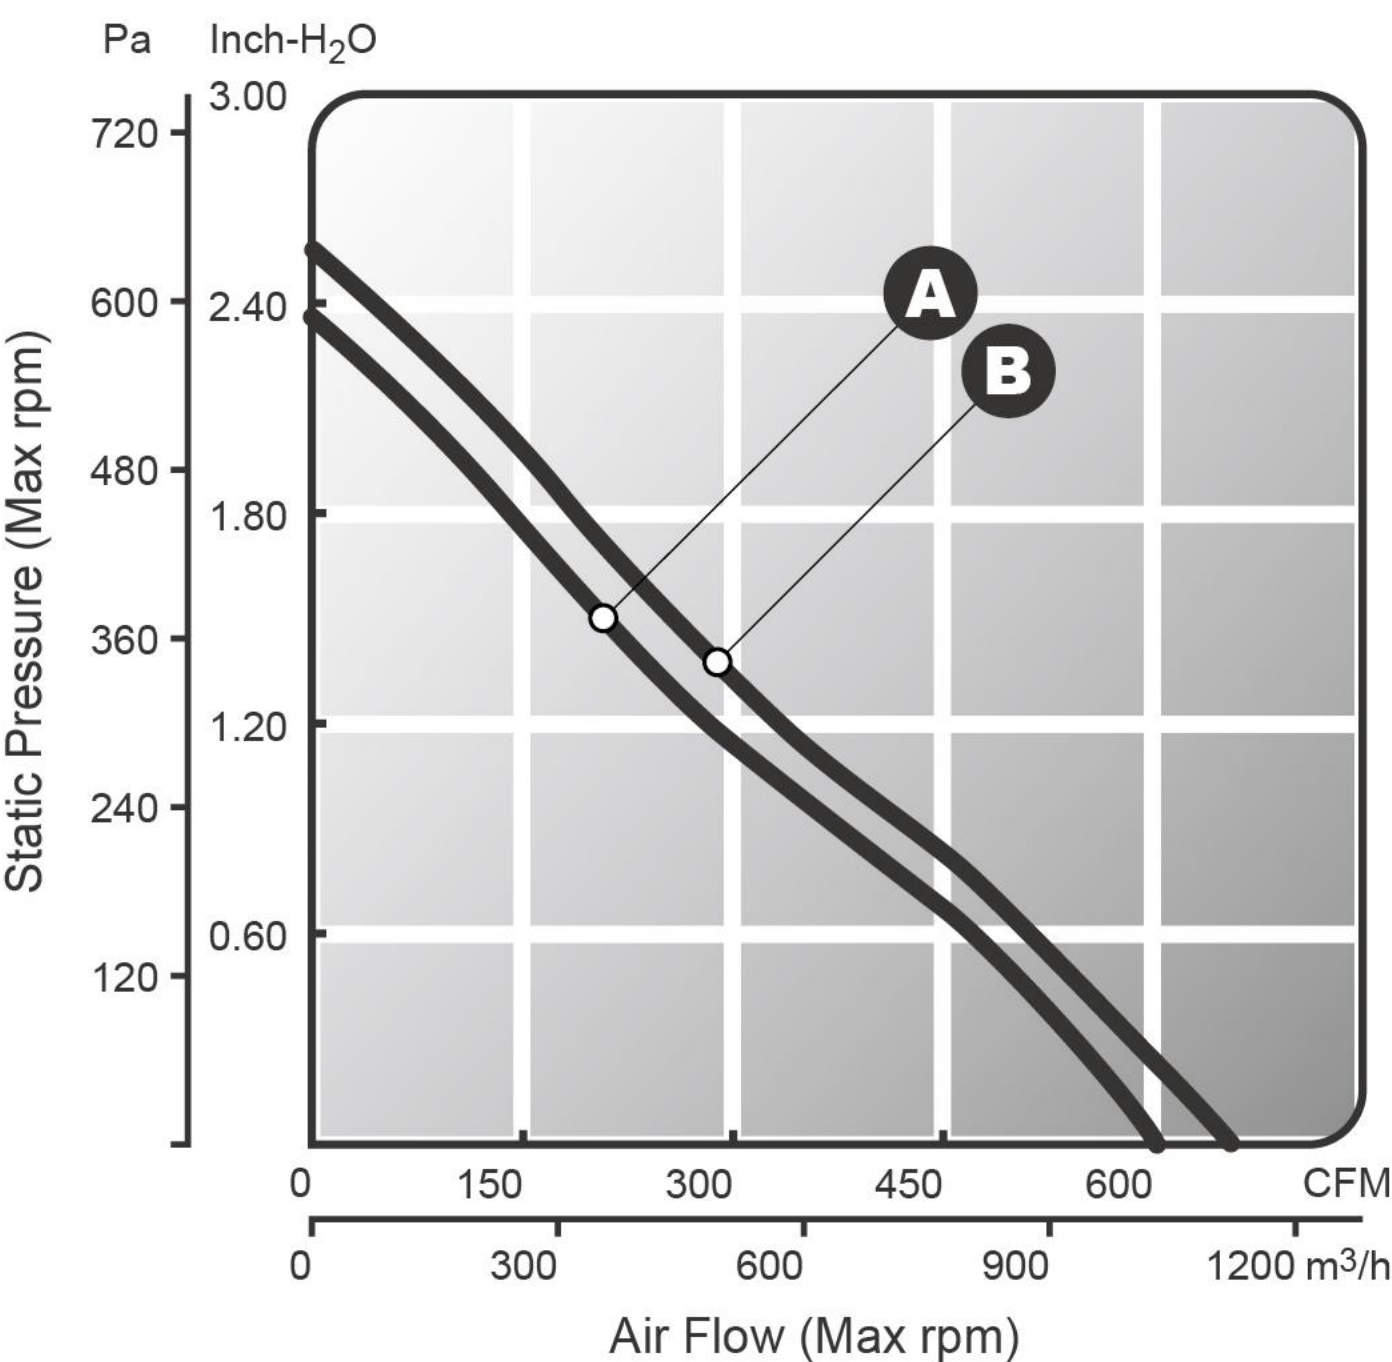

參數表 Specification

	Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dBA)	Weight 重量(g)
A	KU225B2400D24B	24VDC	-	3417	82	2400	648	2.41	76	1780
B	KU225B2600D24B	24VDC	-	4167	100	2600	702	2.61	78	1780
A	KU225B2400D48B	48VDC	-	1708	82	2400	648	2.41	76	1780
B	KU225B2600D48B	48VDC	-	2083	100	2600	702	2.61	78	1780
A	KU225B2400D110B	110VDC	-	745	82	2400	648	2.41	76	2010
B	KU225B2600D110B	110VDC	-	909	100	2600	702	2.61	78	2010
A	KU225B2400E1B	115VAC	50~60	1150	83	2400	648	2.41	76	2010
B	KU225B2600E1B	115VAC	50~60	1380	104	2600	702	2.61	78	2010
A	KU225B2400E2B	230VAC	50~60	640	82	2400	648	2.41	76	2010
B	KU225B2600E2B	230VAC	50~60	780	104	2600	702	2.61	78	2010

KU-250A DC&EC series



(Φ250 x 89 mm)
Φ9.84 x 3.5 inch

操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings
葉輪 鋁合金板材衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum
引綫長度 Lead Wires: 450mm

功能追加 Designed with optional features RD,
Options: Tach/FG, PWM, 0-10V function

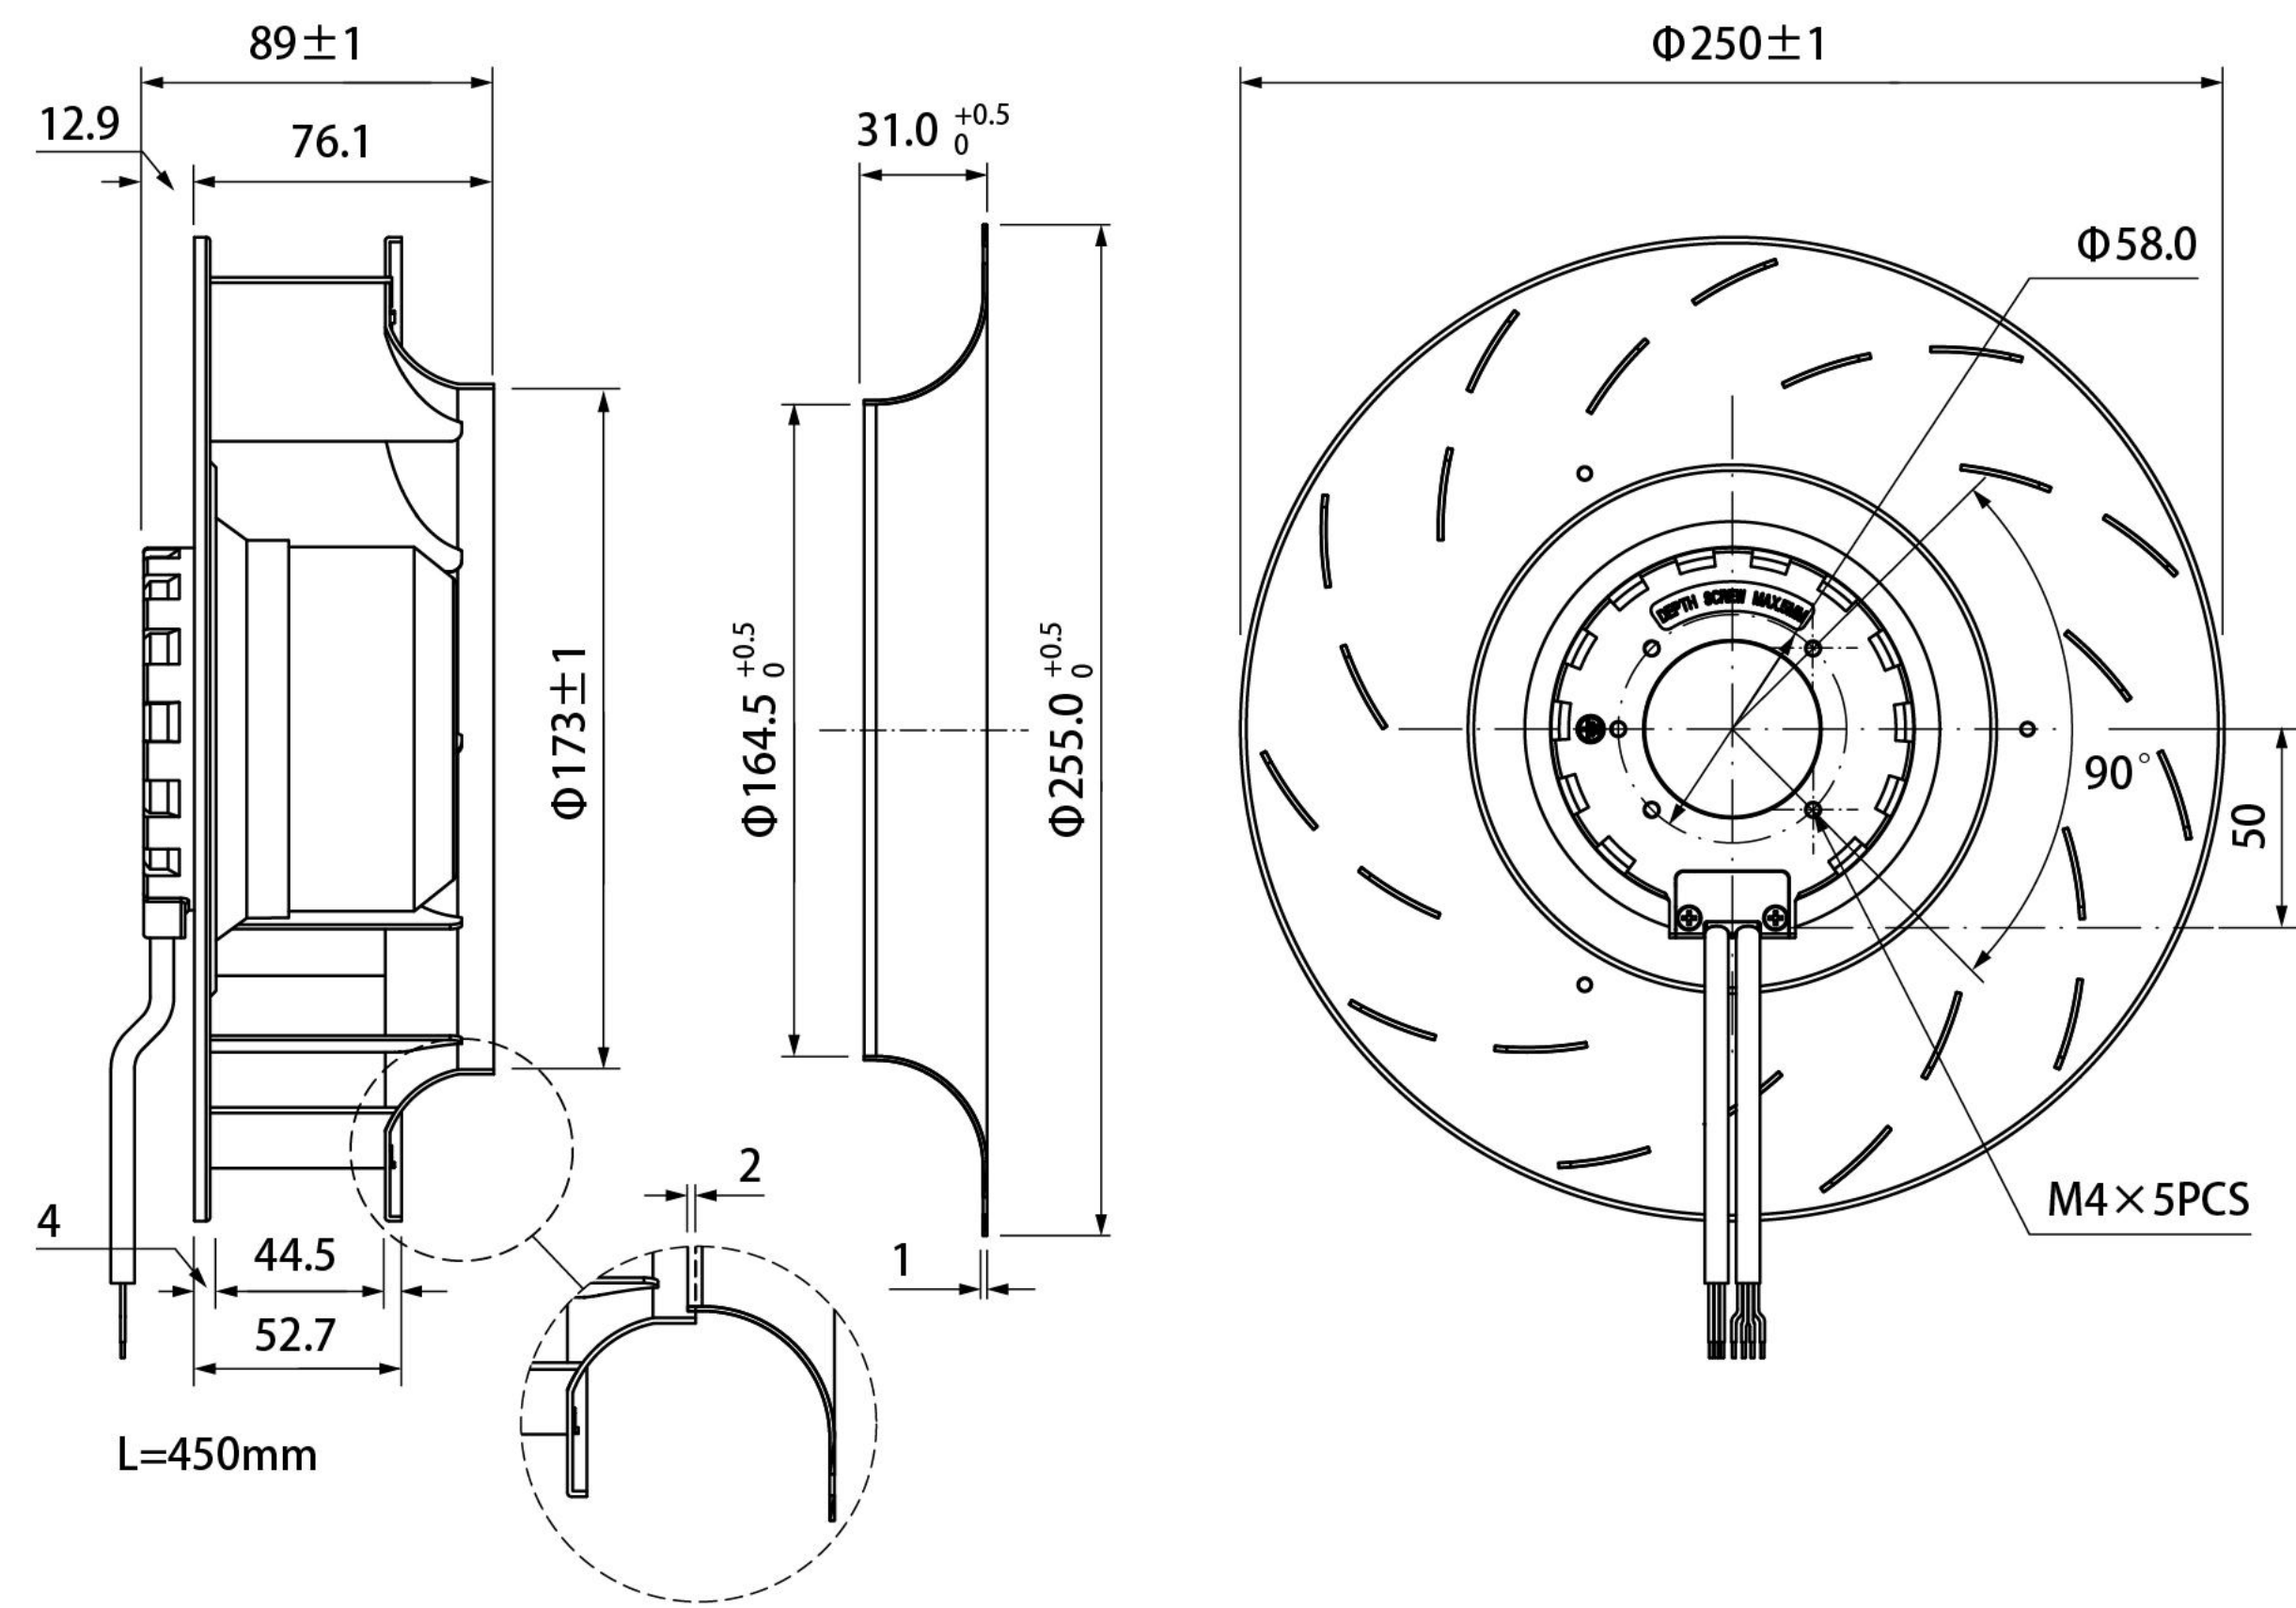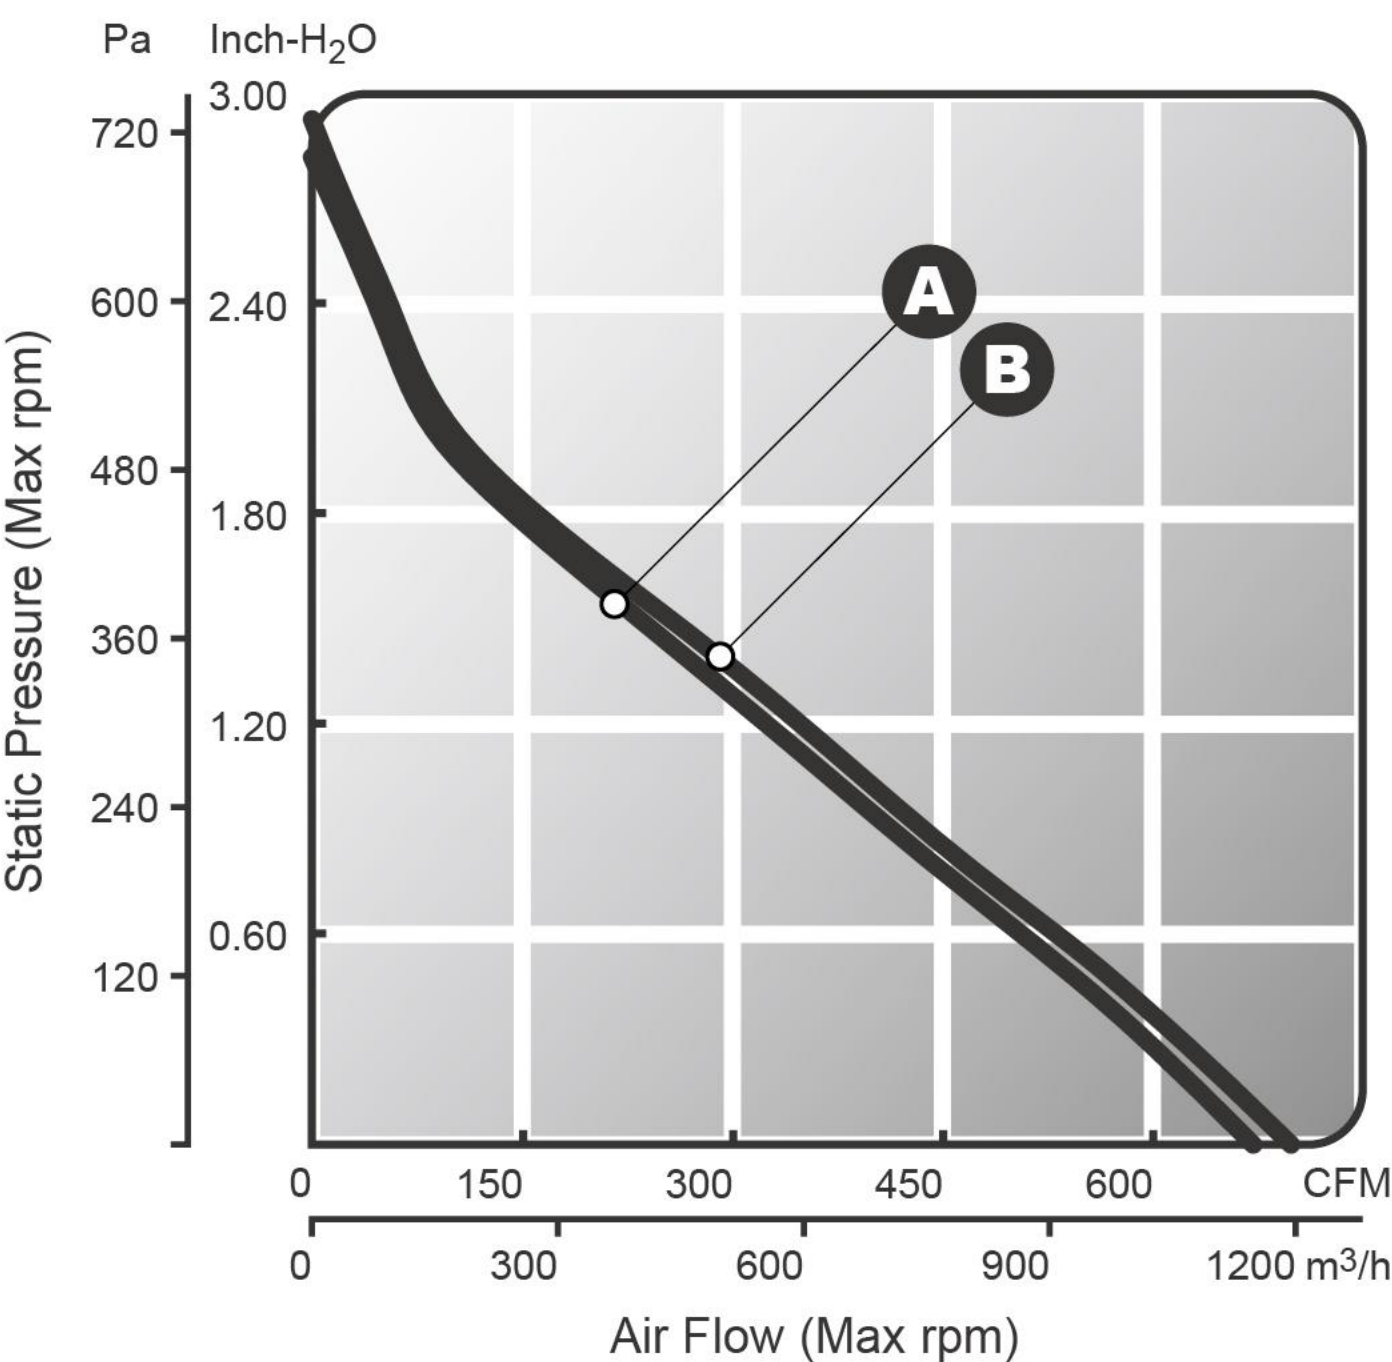

參數表 Specification

	Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(mA)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dBA)	Weight 重量(g)
B	KU250A2600D24B	24VDC	-	4625	111	2600	699	2.93	79	1760
B	KU250A2600D48B	48VDC	-	2270	109	2600	699	2.93	79	1760
A	KU250A2500E1B	115VAC	50~60	1350	100	2500	672	2.82	78	1850
A	KU250A2500E2B	230VAC	50~60	700	103	2500	672	2.82	78	1850