
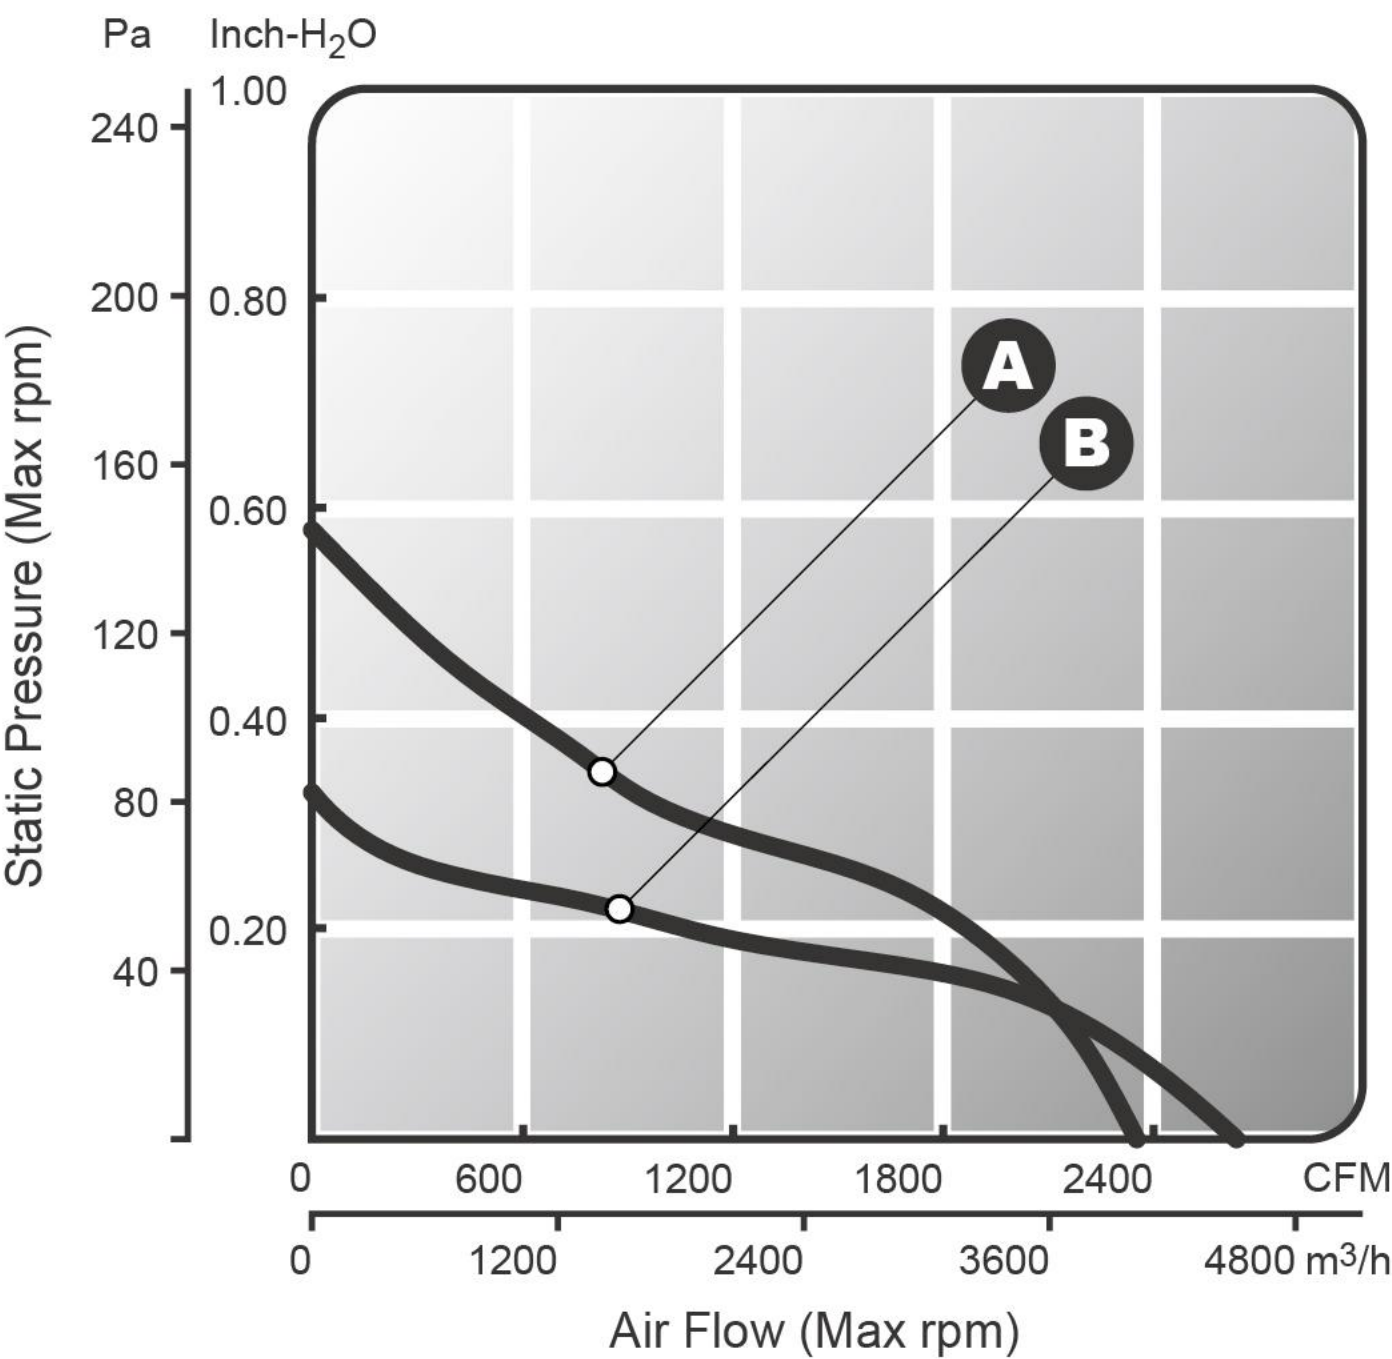


KA-420-5 4P series

(□420 x 120 mm)
□16.54 x 4.72 inch

Operating Temperature: -50℃ ~ +70℃
Storage Temperature: -20℃ ~ +80℃

Construction: Light metal material impeller & frame
Bearing System: Ball Bearing
Connection: Terminal Block
Frame: Flanged
Protection: TP

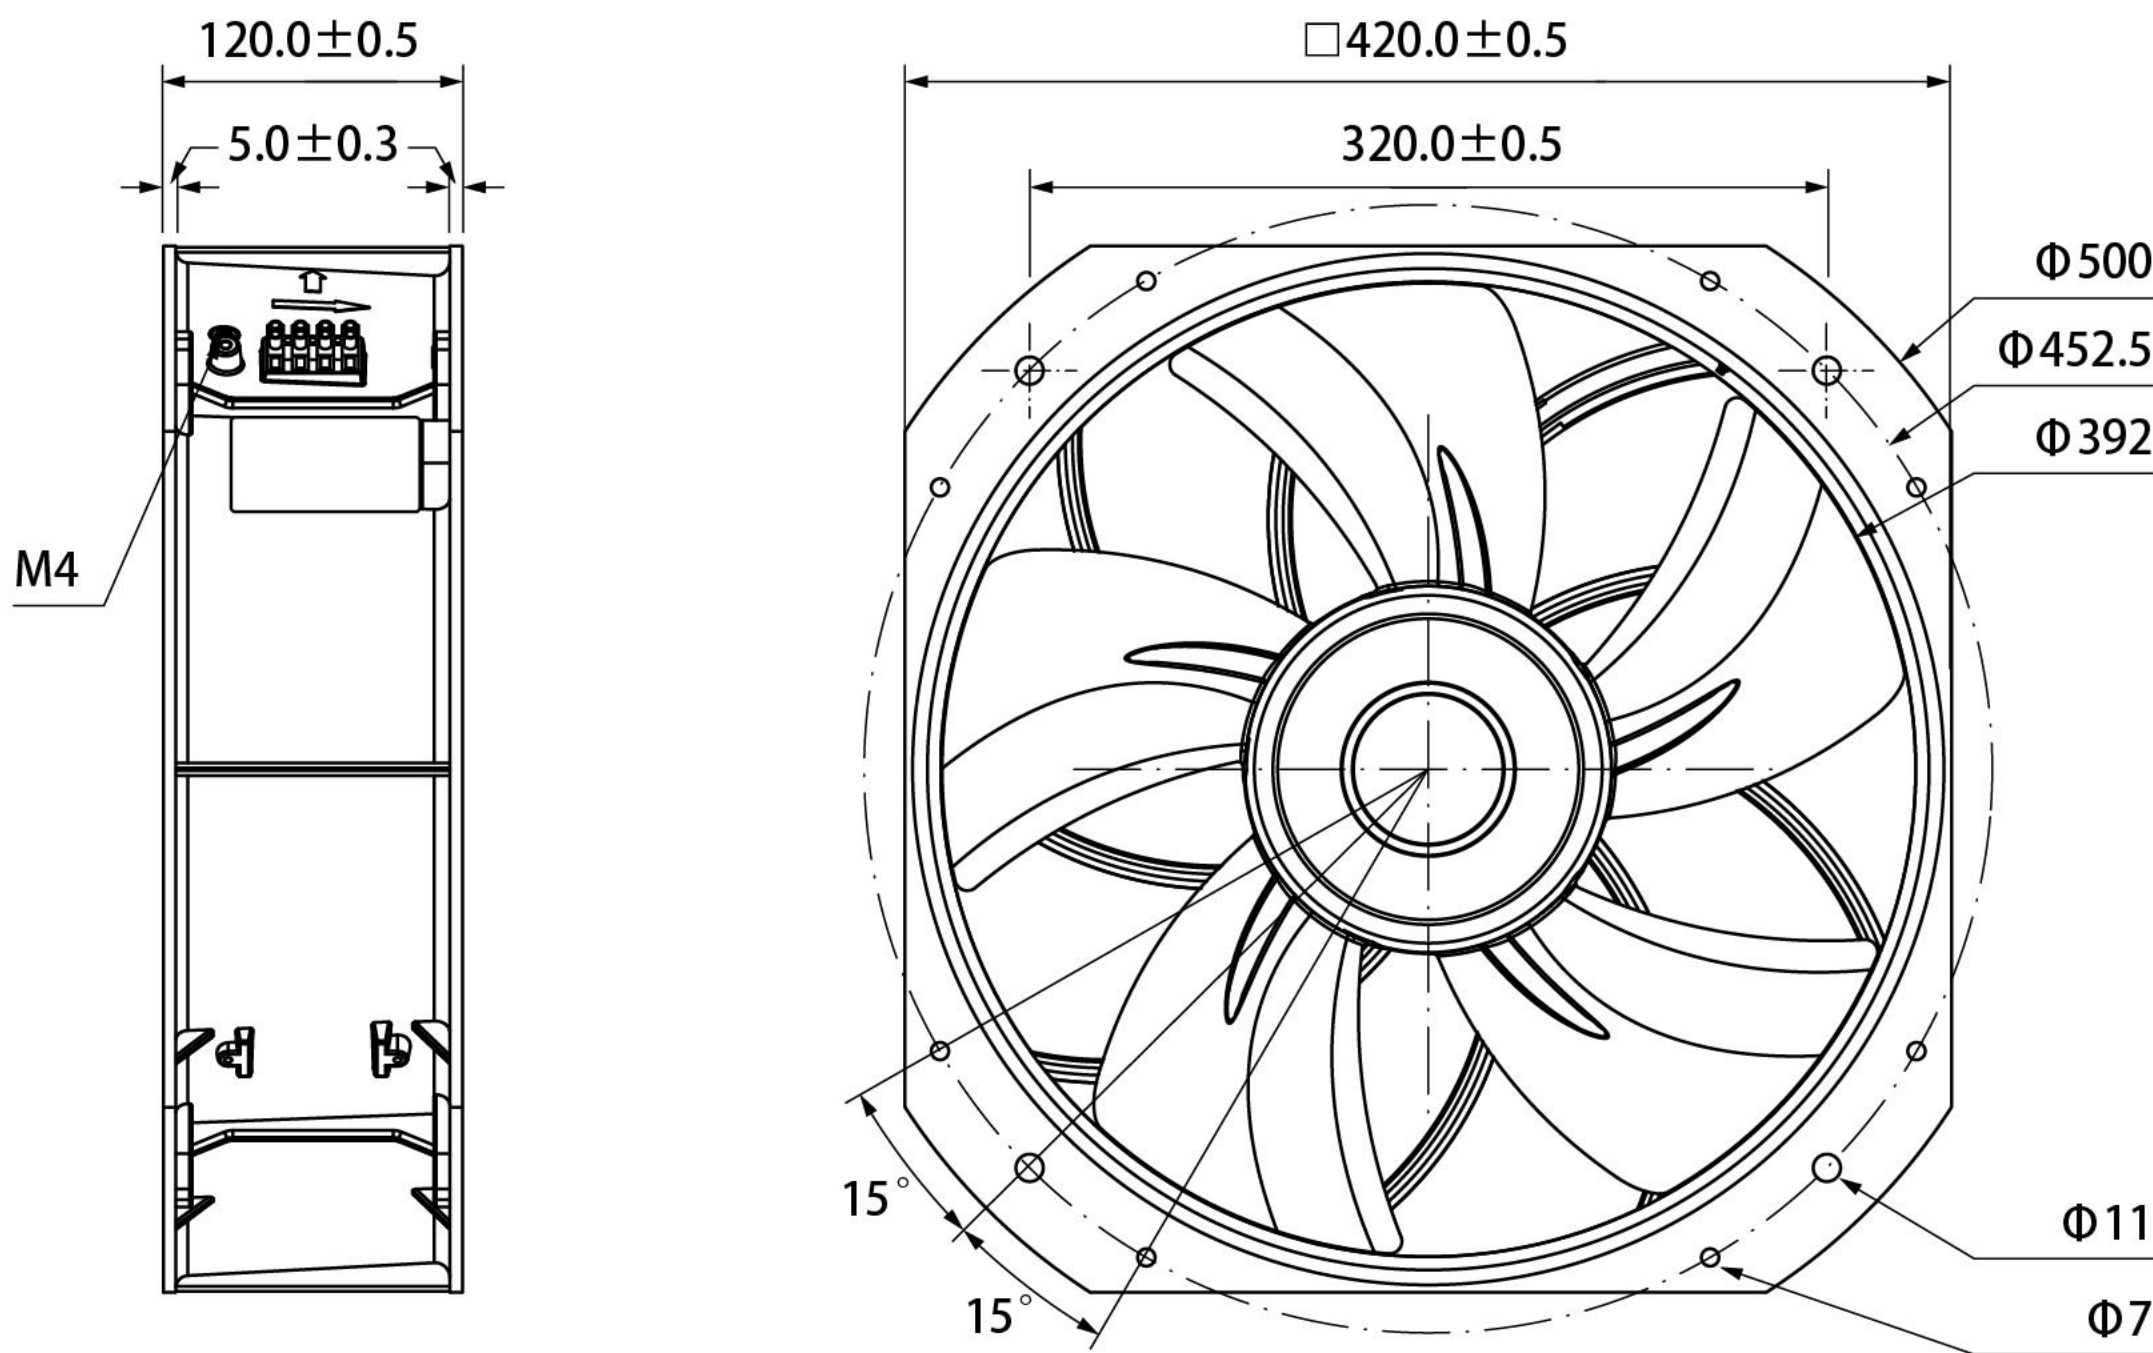

A 50 Hz
B 60 Hz



參數表 Specification



Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KA420HA(1)1BMT-5-4P	110~120	50/60	3.00/4.20	308/472	1400/1700	2356/2640	0.58/0.33	80/84	9000
● KA420HA(1)2BMT-5-4P	220~240	50/60	1.50/2.20	310/475	1400/1700	2356/2640	0.58/0.33	80/84	9000
● KA420HA(1)3BMT-5-4P	380~400	50/60	0.90/1.40	312/480	1400/1700	2356/2640	0.58/0.33	80/84	9000
● KA420HA(3)3BMT-5-4P	380~400	50/60	0.70/0.65	309/476	1400/1700	2356/2640	0.58/0.33	80/84	9000



*說明：表中(1)代表單相，(3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.

KA-420-7 4P series

(□420 x 120 mm)
□16.54 x 4.72 inch

Operating Temperature: -50℃ ~ +70℃
Storage Temperature: -20℃ ~ +80℃

Construction: Light metal material impeller & frame
Bearing System: Ball Bearing
Connection: Terminal Block
Frame: Flanged
Protection: TP

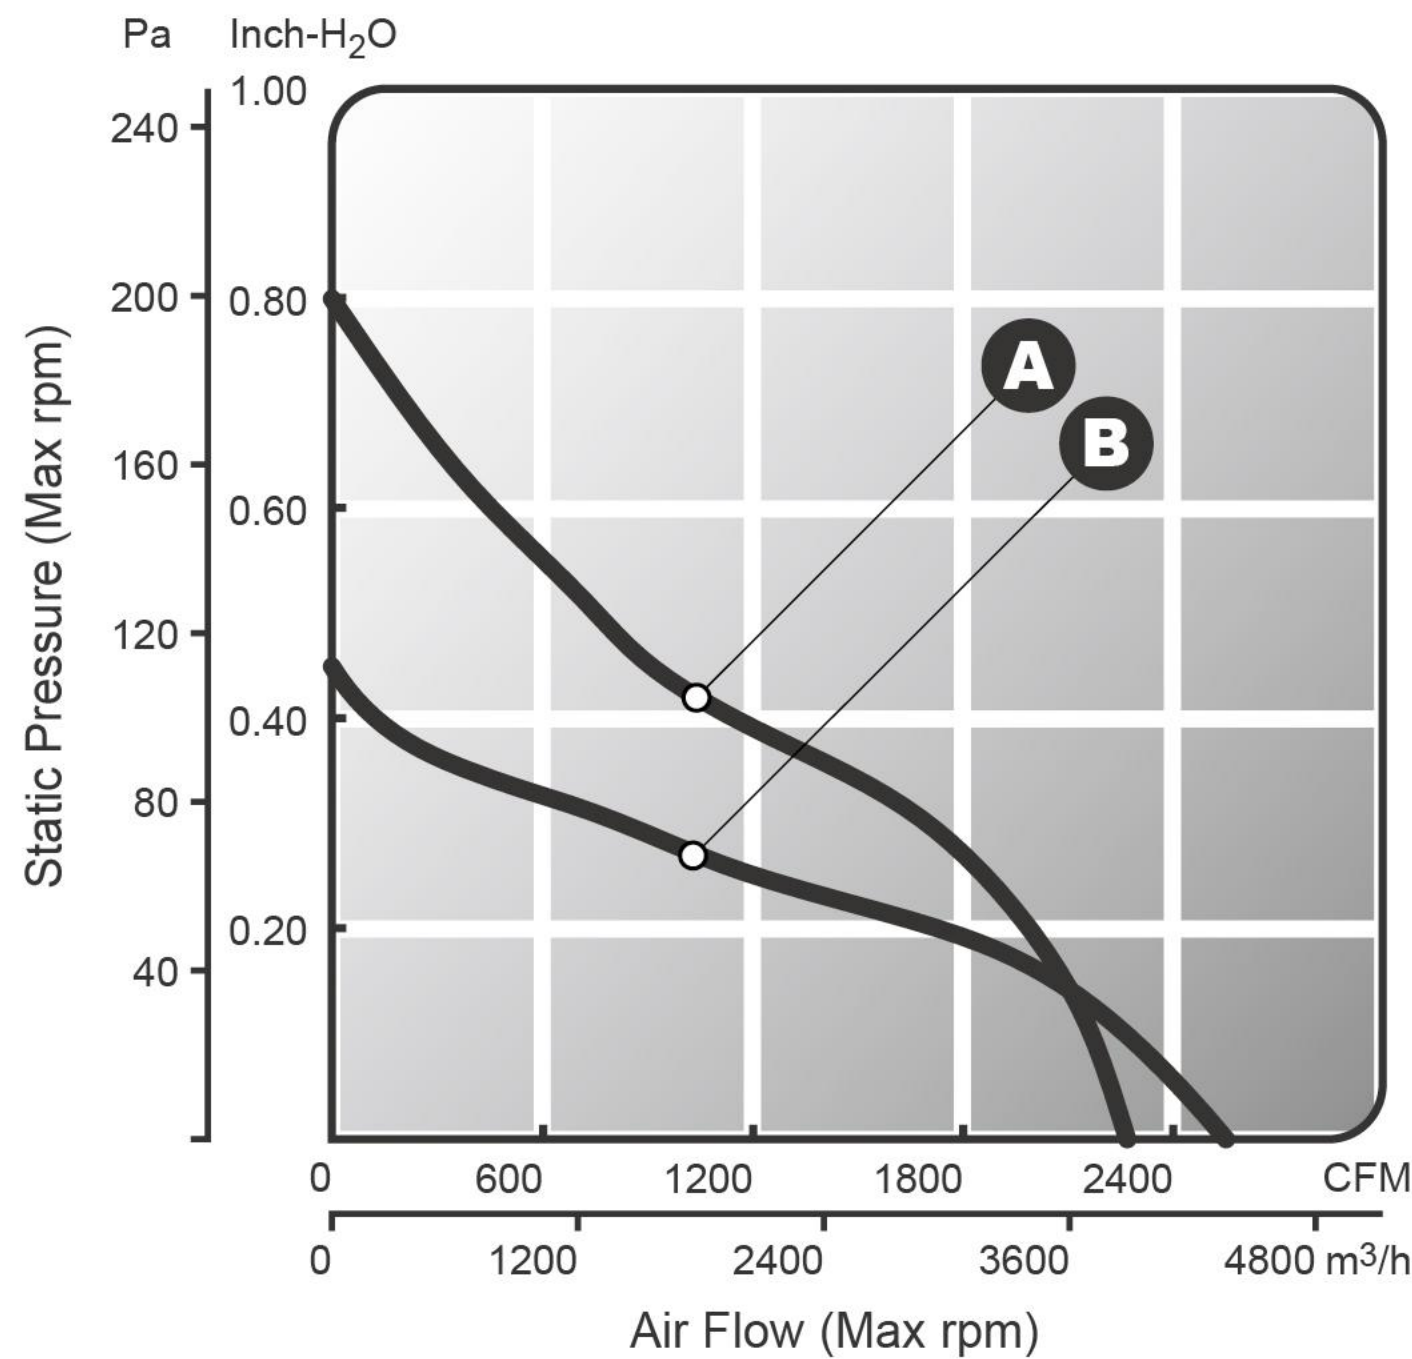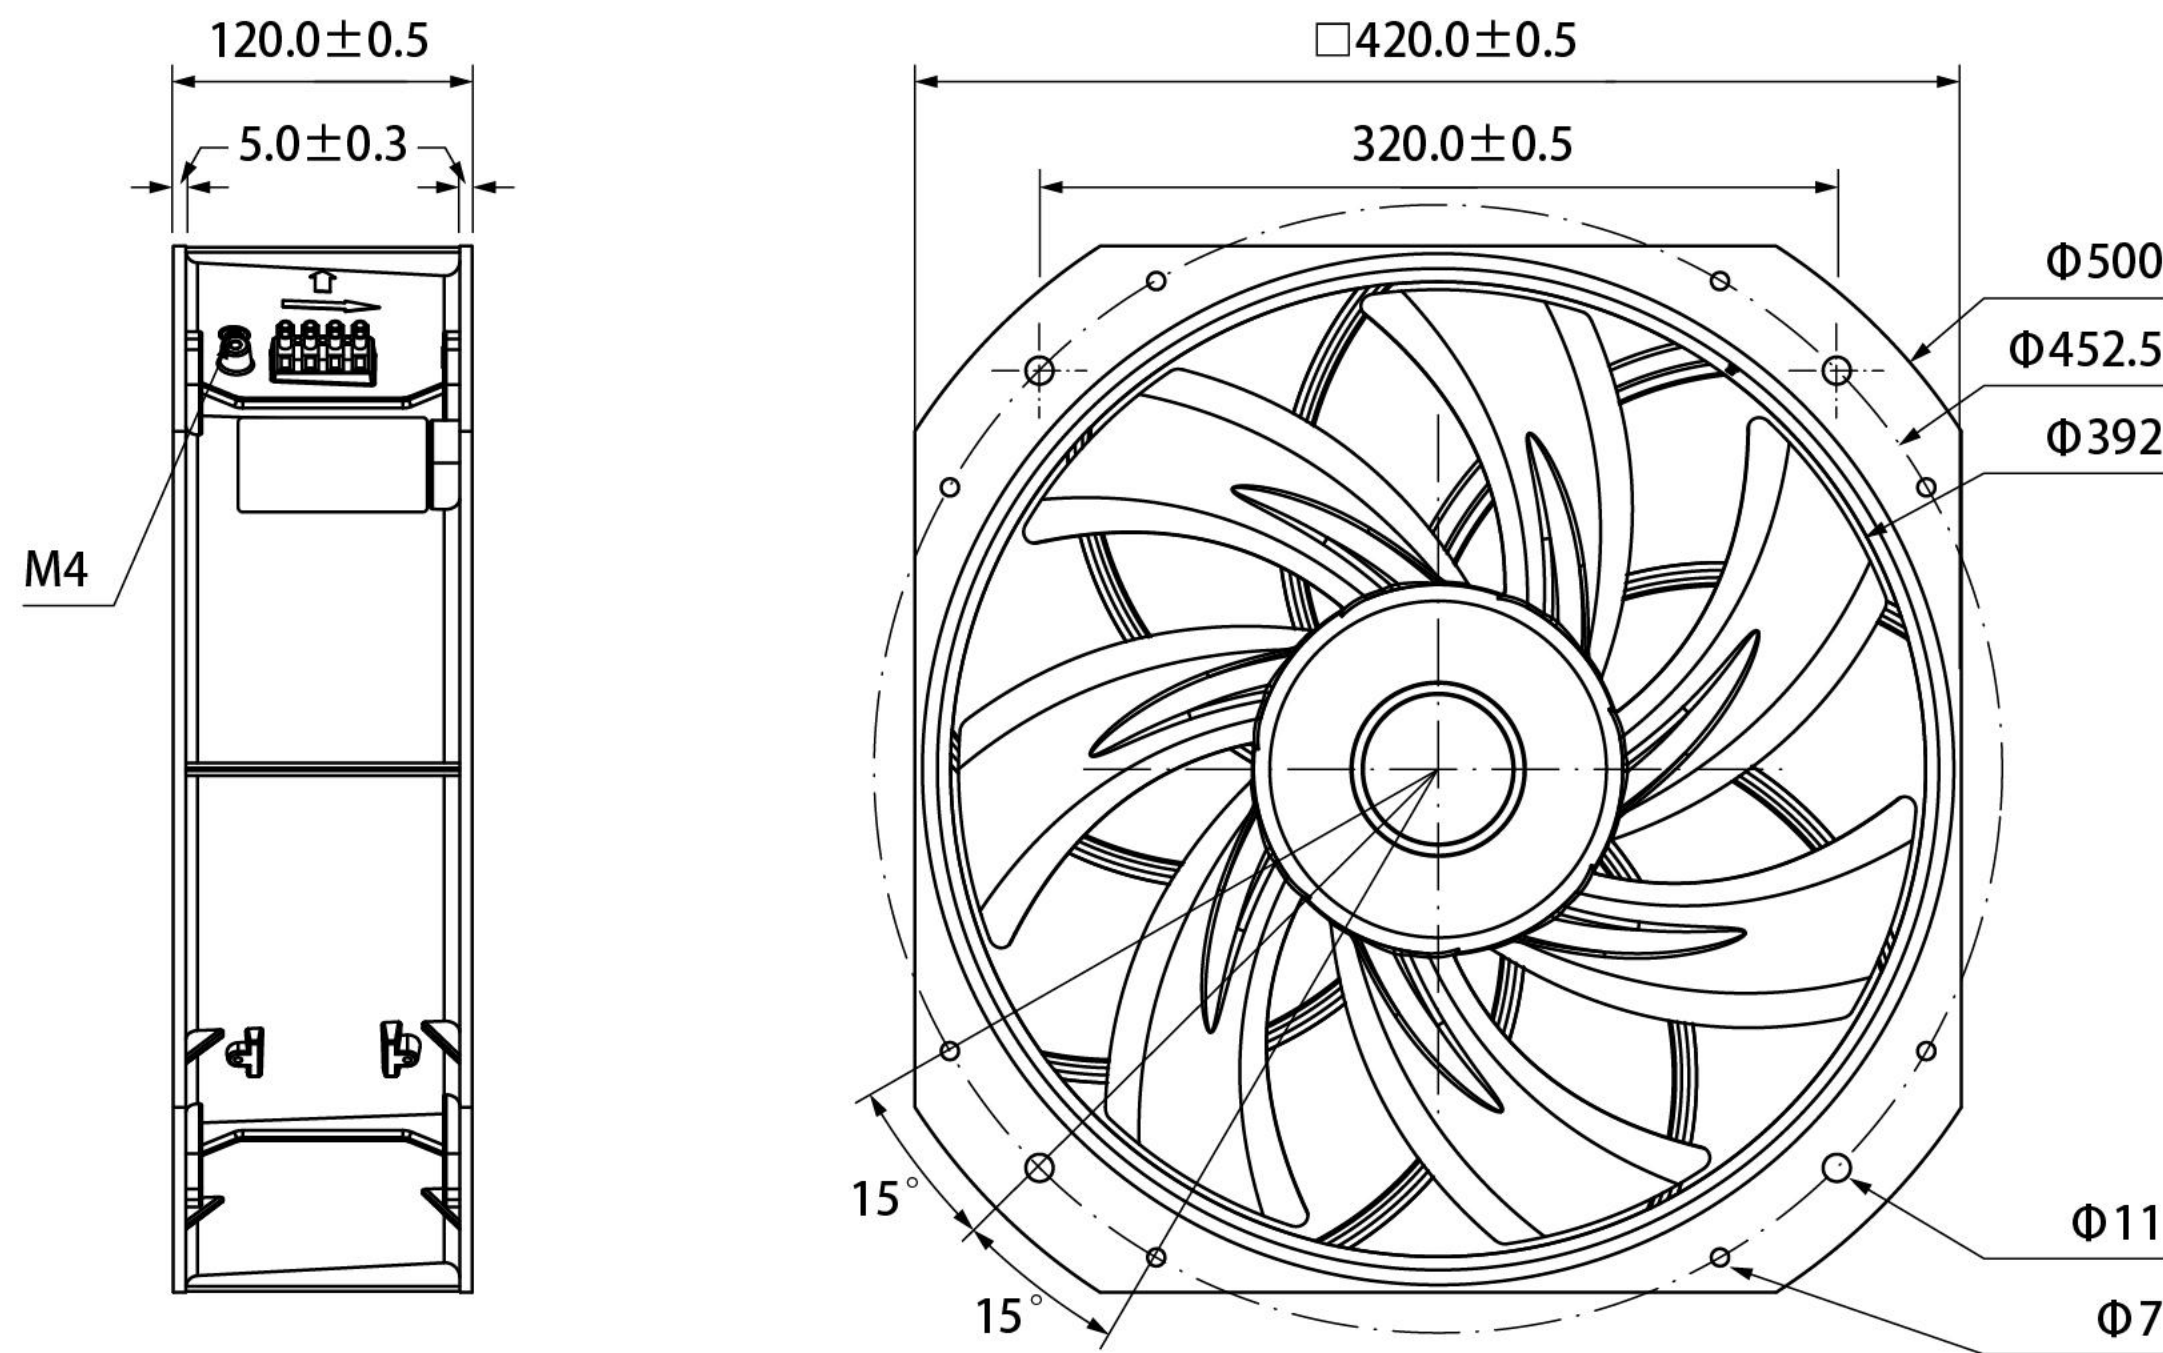

A 50 Hz
B 60 Hz



參數表 Specification



Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KA420HA(1)1BMT-7-4P	110~120	50/60	2.00/1.90	170/215	1400/1700	2273/2553	0.80/0.45	75/80	9150
● KA420HA(1)2BMT-7-4P	220~240	50/60	1.00/1.20	185/240	1400/1700	2273/2553	0.80/0.45	75/80	9150
● KA420HA(1)3BMT-7-4P	380~400	50/60	0.70/0.80	187/245	1400/1700	2273/2553	0.80/0.45	75/80	9150
● KA420HA(3)3BMT-7-4P	380~400	50/60	0.65/0.60	183/243	1400/1700	2273/2553	0.80/0.45	75/80	9150

*說明：表中(1)代表單相，(3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.