

KU-133A OR series

(Φ133 x 73 mm)
Φ5.24 x 2.87 inch



操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings

葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

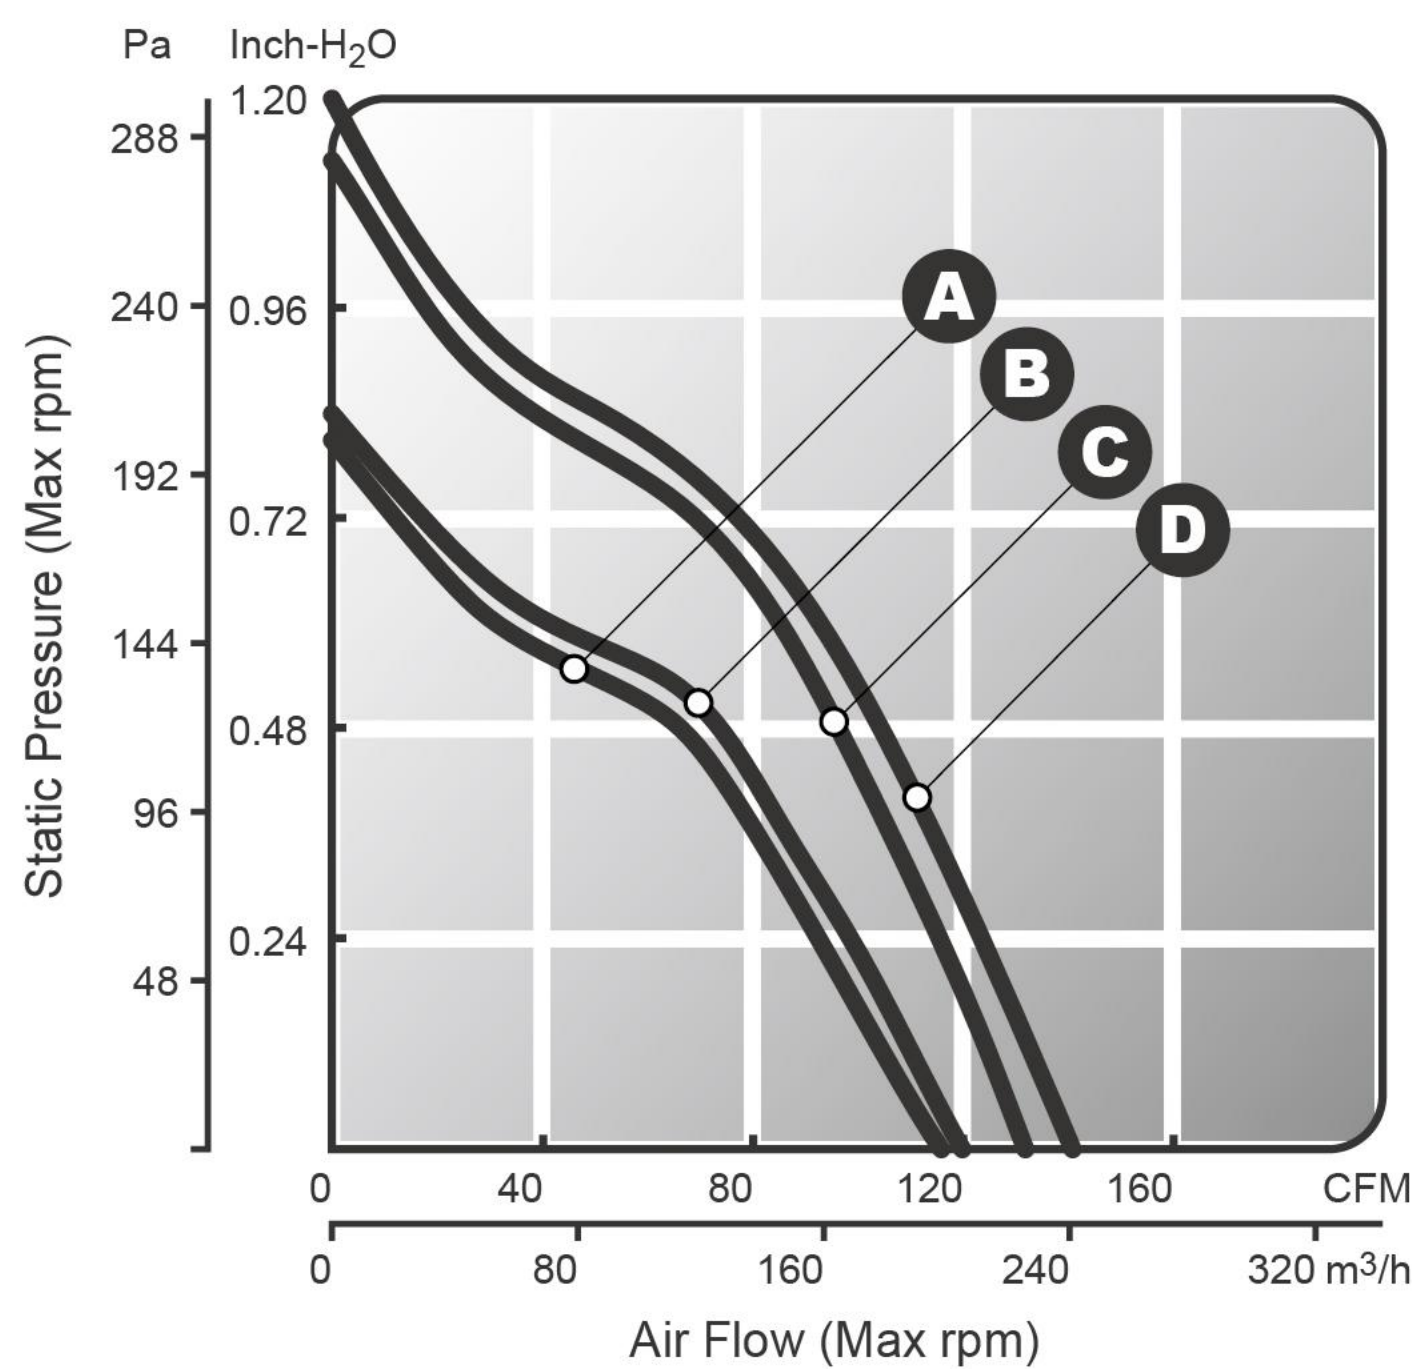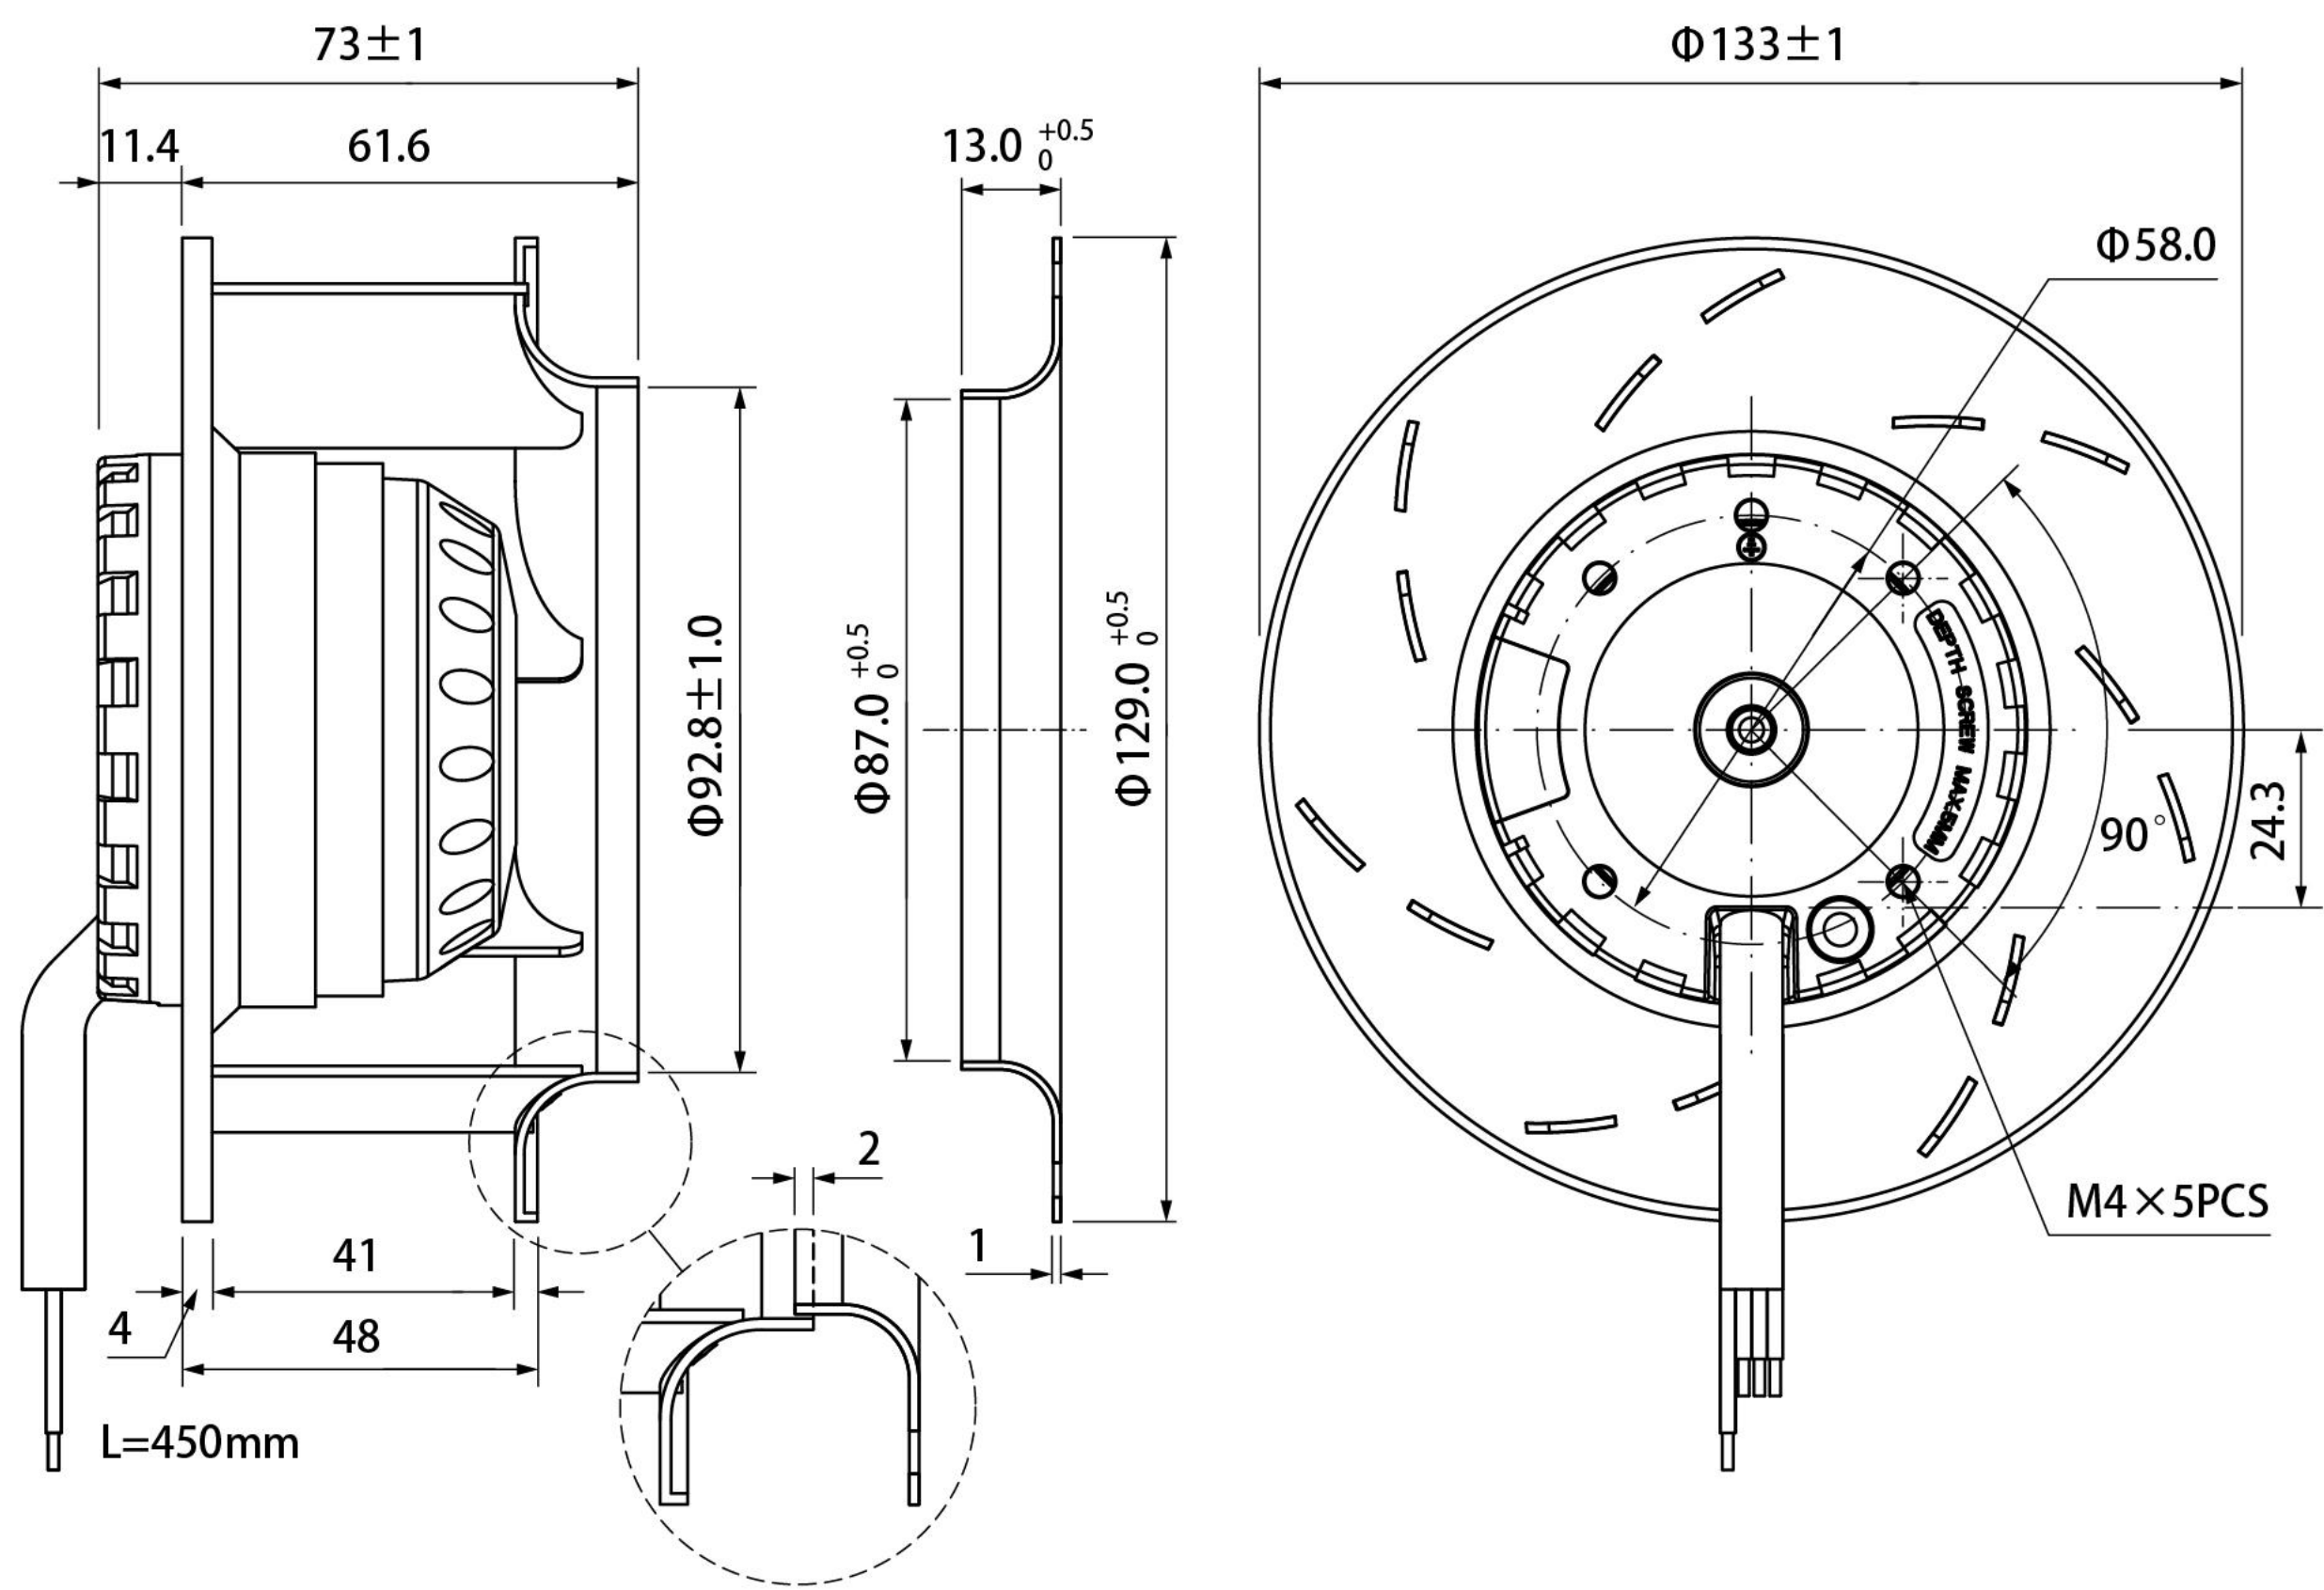

A 2700 RPM C 3000 RPM
B 2800 RPM D 3200 RPM



參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KU133AHA(1)1B(OR)	110~120	50/60	0.39/0.31	33/31	2800/3200	120/141	0.84/1.20	59/63	880
● KU133AHA(1)2B(OR)	220~240	50/60	0.17/0.16	32/33	2800/3200	120/141	0.84/1.20	59/63	880
● KU133AHA(1)3B(OR)	380~400	50/60	0.12/0.10	33/32	2800/3200	120/141	0.84/1.20	59/63	880
● KU133AHA(3)3B(OR)	380~400	50/60	0.07/0.06	25/26	2700/3000	116/132	0.81/1.13	58/61	880

*說明：表中(1)代表單相，(3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.



KU-133B OR series

(Φ133 x 91 mm)
Φ5.24 x 3.58 inch



操作溫度 Operating Temperature: -10℃ ~ +70℃
存儲溫度 Storage Temperature: -40℃ ~ +85℃

軸承系統 全密封長壽命雙滾珠軸承
Bearing System: Fully sealed long life double ball bearings

葉輪 鋁合金板衝壓拉伸成型+激光焊接工藝,表面經電泳+噴塑處理
Impeller: Aluminum plate stamping tensile forming with laser welding process,surface treatment (ED coating+powder coating)

馬達底座 Motor Base: 鋁合金壓鑄 Die Casting Aluminum

引綫長度 Lead Wires: 450mm

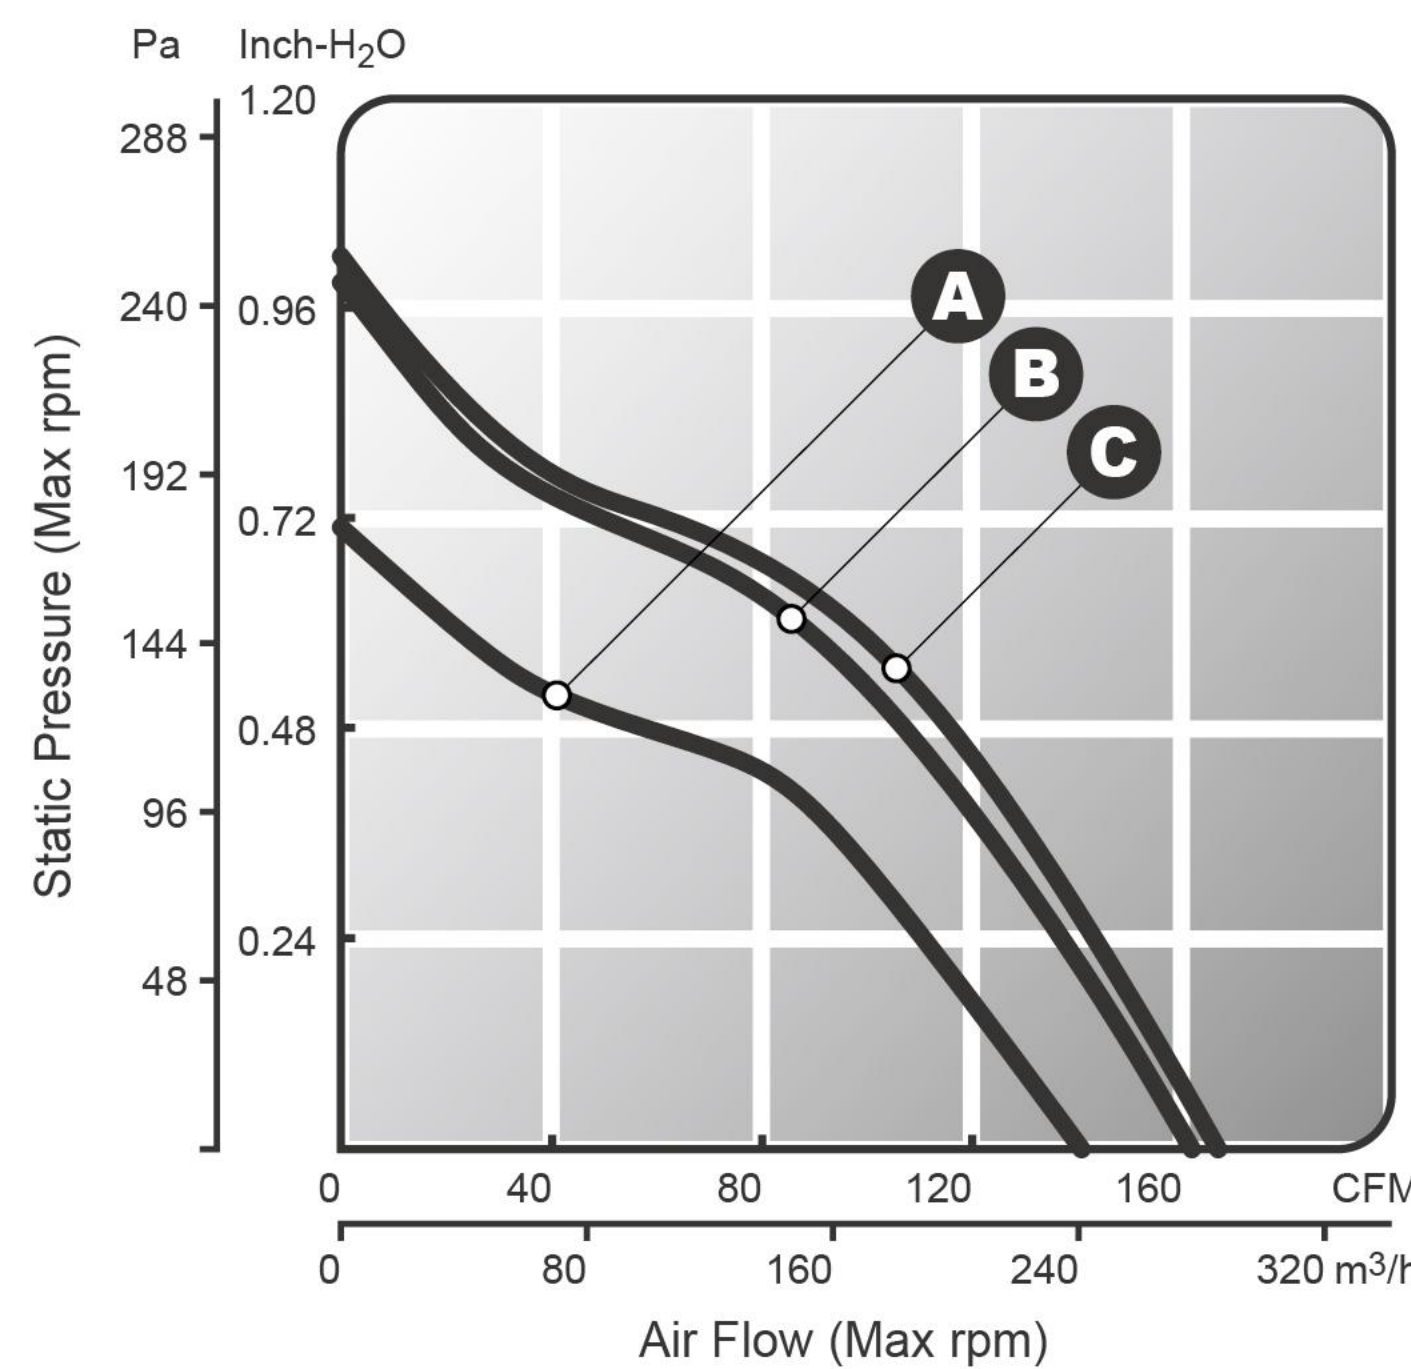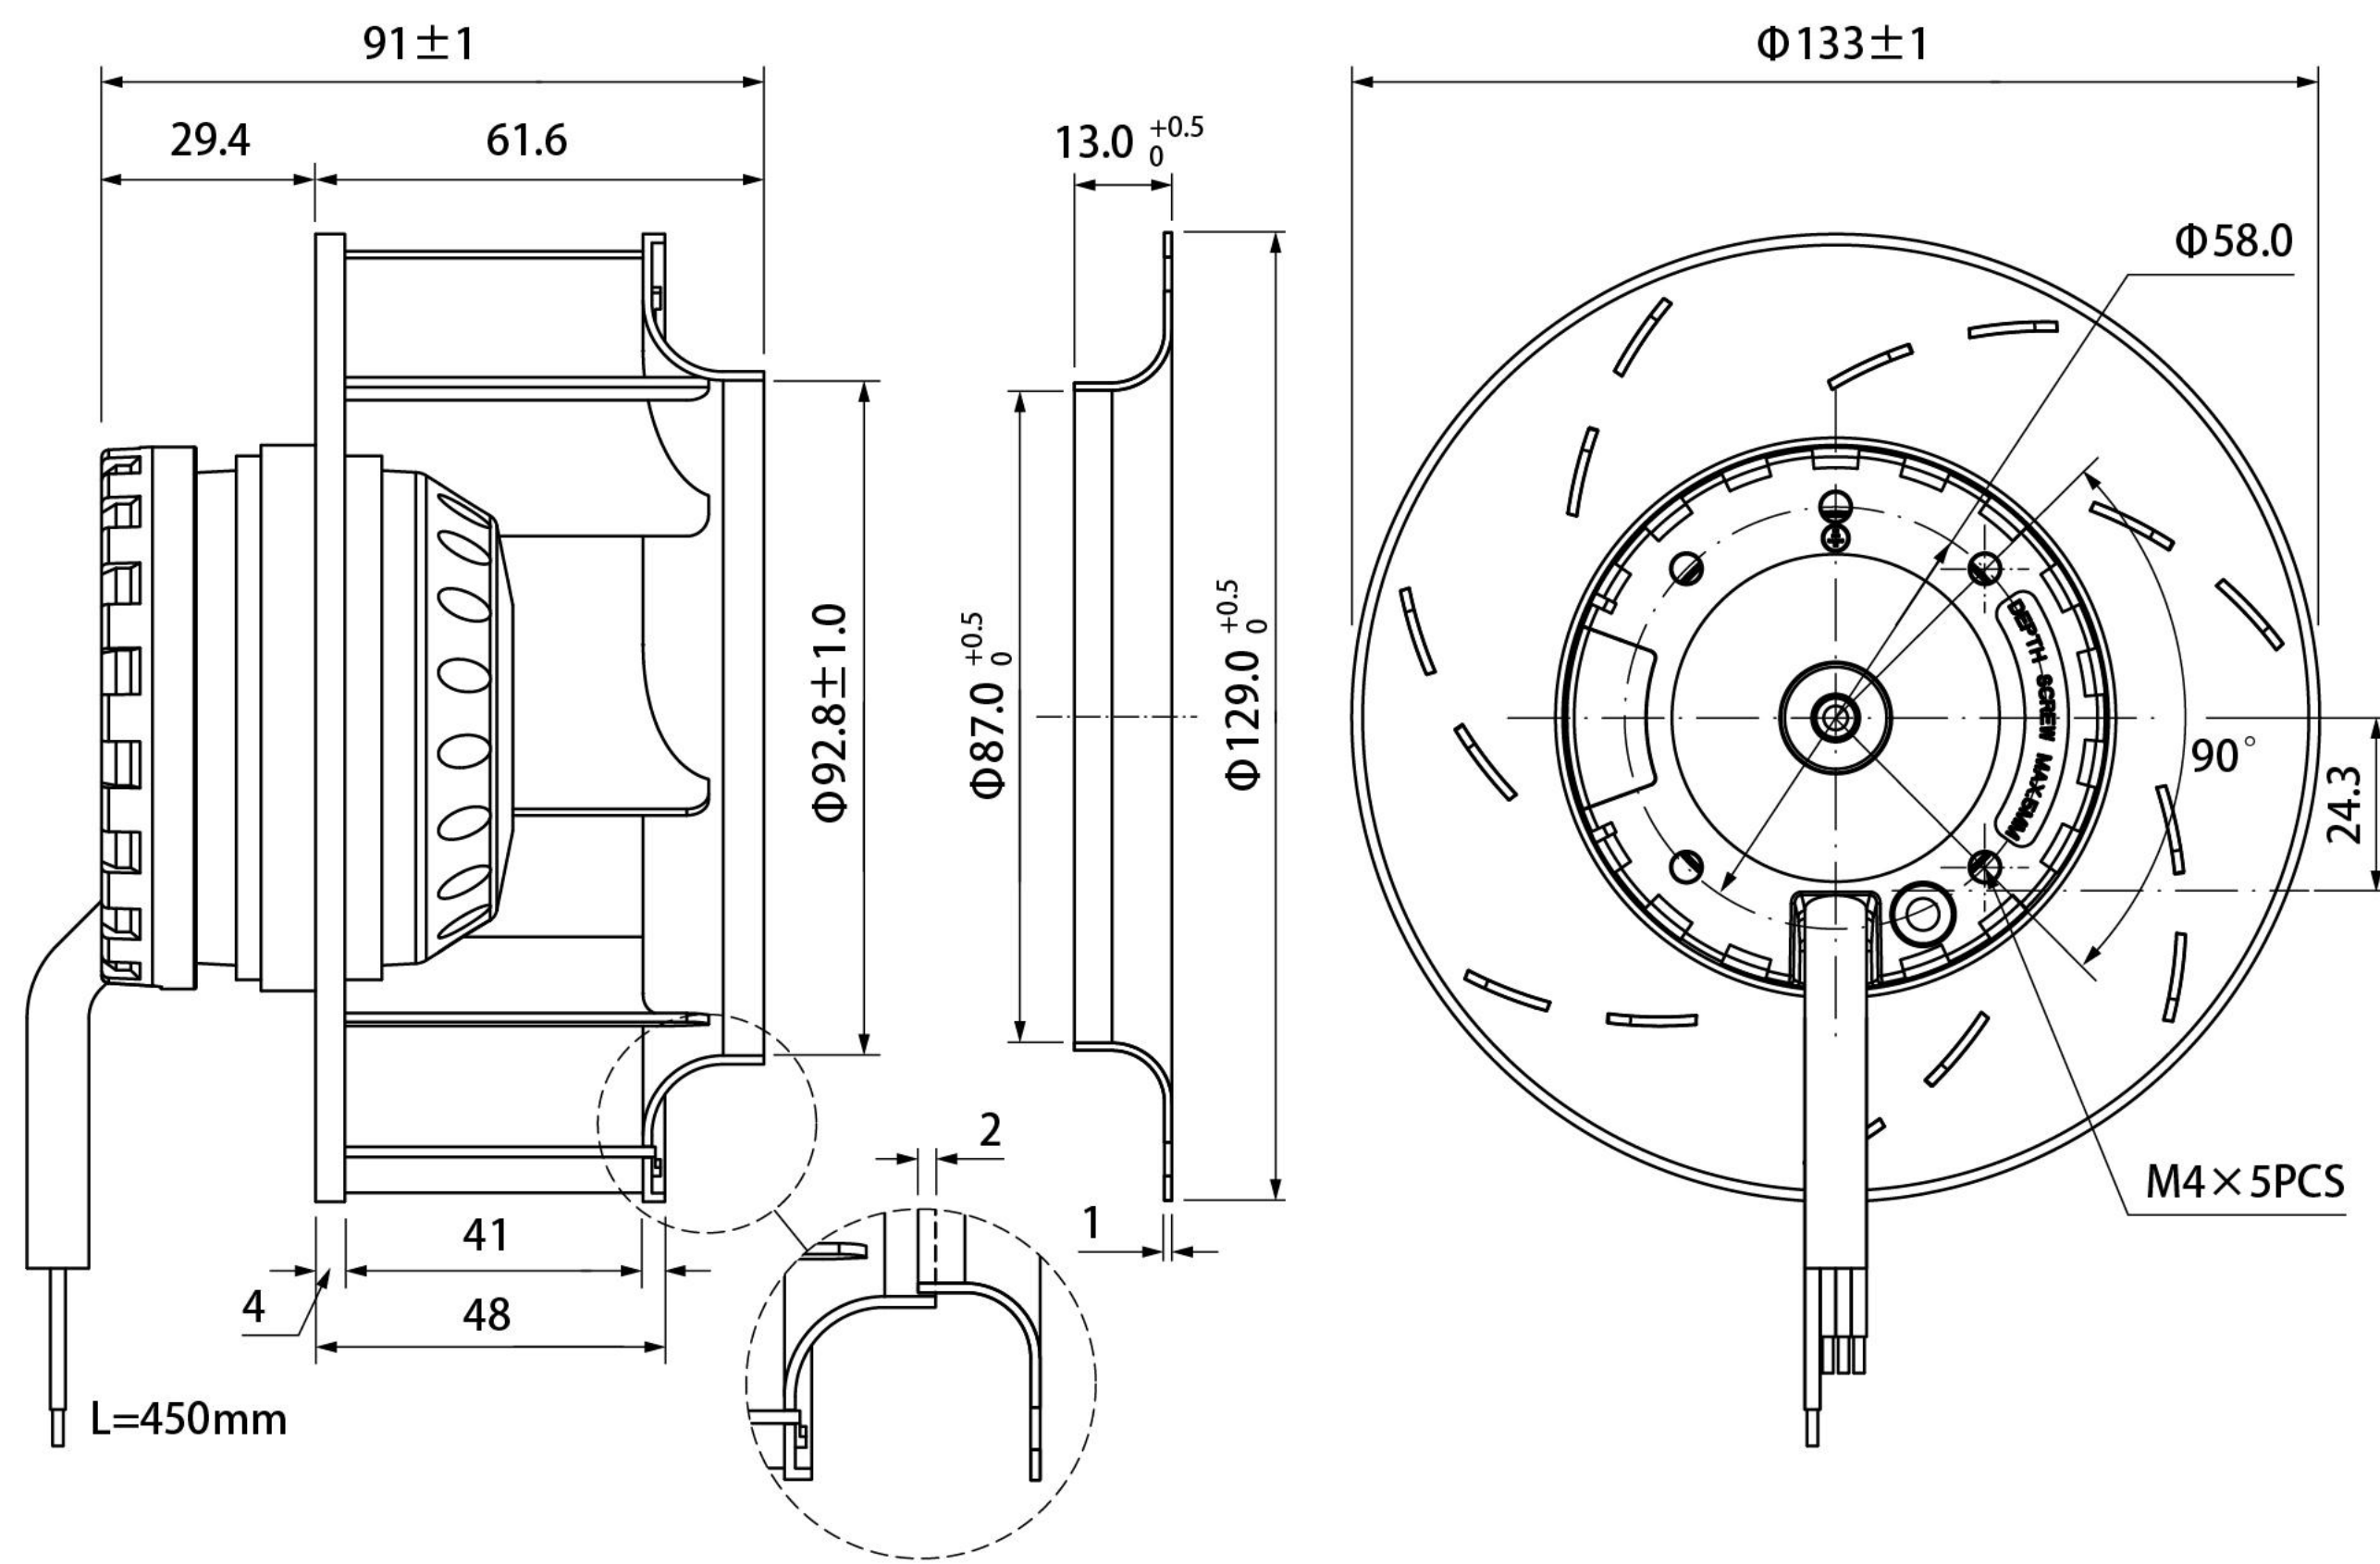

A 2700 RPM C 3100 RPM
B 3000 RPM



參數表 Specification

Model 型號	Voltage 電壓(V)	Frequency 頻率(Hz)	Current 電流(A)	Power 功率(W)	Speed 轉速(RPM)	Air Flow 風量(CFM)	Max.Static Pressure 靜壓(inch-H ₂ O)	Noise Level 噪音(dbA)	Weight 重量(g)
● KU133BHA(1)1B(OR)	110~120	50/60	0.26/0.25	26/27	2700/3100	141/167	0.71/1.02	57/61	780
● KU133BHA(1)2B(OR)	220~240	50/60	0.18/0.16	34/33	2700/3100	141/167	0.71/1.02	57/61	780
● KU133BHA(1)3B(OR)	380~400	50/60	0.10/0.09	32/29	2700/3100	141/167	0.71/1.02	57/61	780
● KU133BHA(3)3B(OR)	380~400	50/60	0.08/0.07	28/27	2700/3000	141/162	0.71/0.99	57/60	780

*說明：表中(1)代表單相，(3)代表三相 *Note: (1)represent single-phase,(3)represent triphase in the form.

